



LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
CM	00		T2	REVISED PER ECR-15-006687	26OCT2015	NK	NL

D

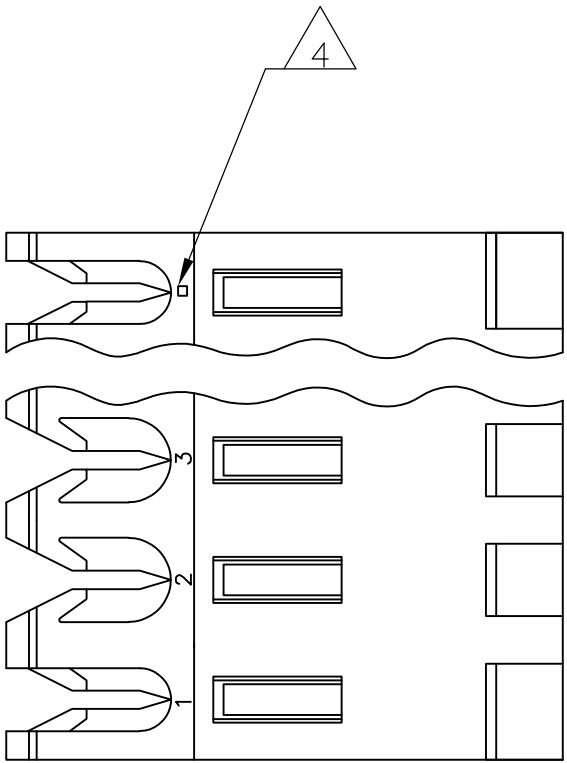

C

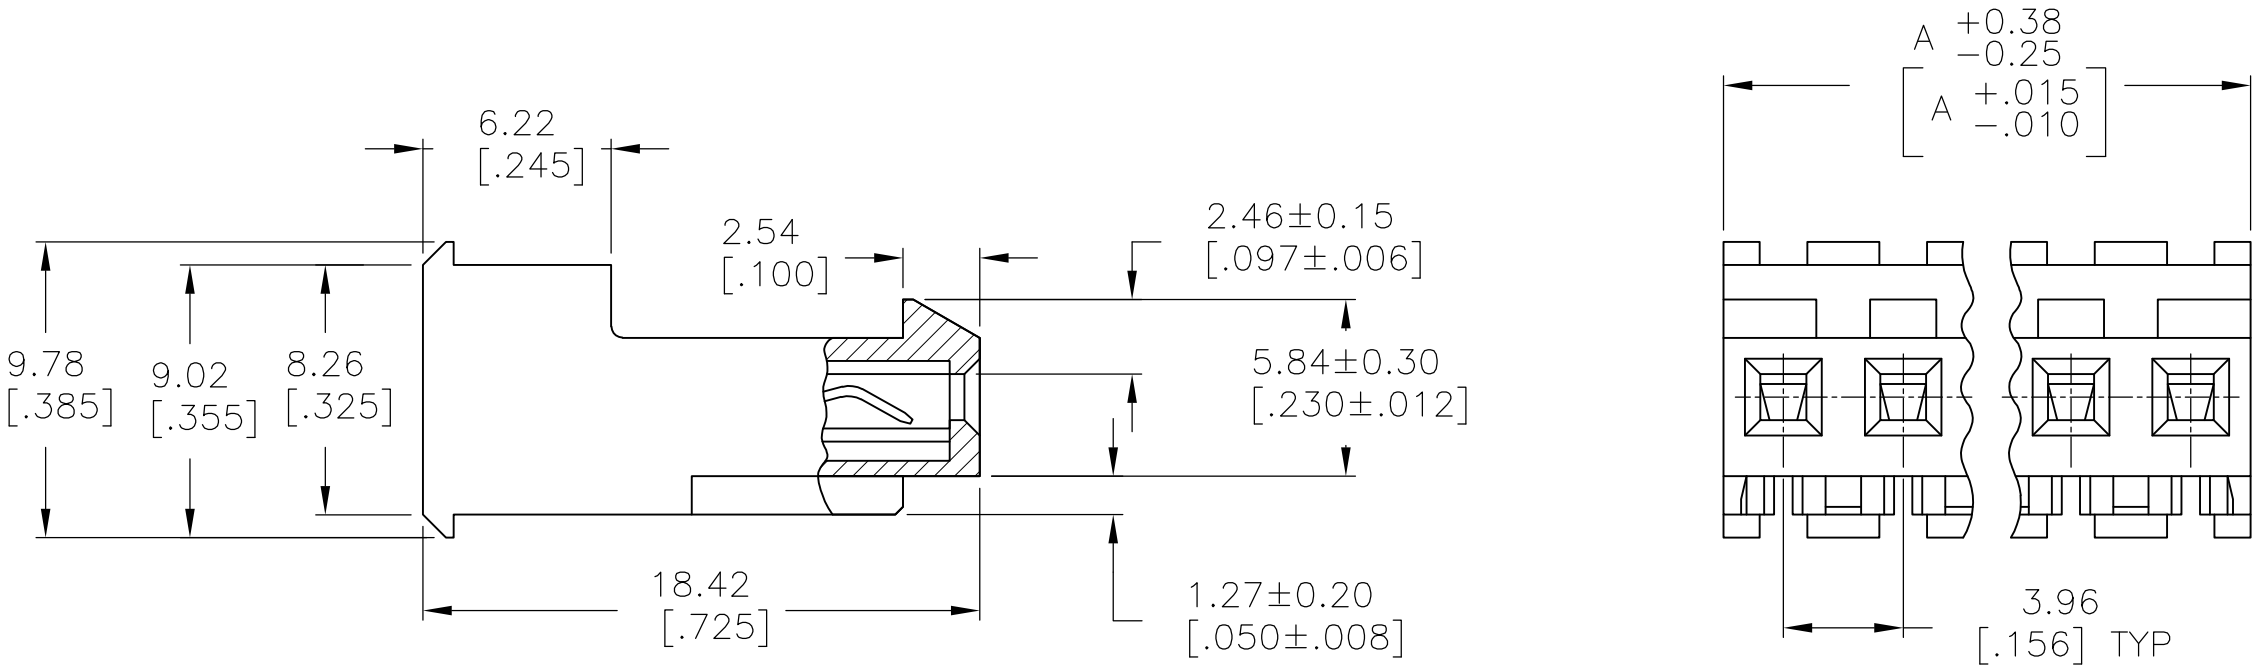

B

- 1 MATERIAL: CONNECTOR - NYLON UL94V-2 (RED).
CONTACTS - 0.30[.012] THICK COPPER ALLOY
0.00076[.000030] GOLD THK OR 0.00008[.000003] MIN THK
GOLD FLASH OVER 0.00068[.000027] THK PALLADIUM NICKEL,
PER TE CONNECTIVITY'S DISCRETION. IN CONTACT
AREA WITH BRIGHT TIN-LEAD FOR 641229-2 THRU
2-641229-4, MATTE WHISKER MITIGATED TIN FOR
3-641229-2 THRU 5-641229-4 OVER NICKEL UNDERPLATE.

- 2 CONTACTS ACCEPT 22 AWG WIRE WITH 2.41[.095] MAX
INSULATION DIAMETER.
- 3 CONTACTS MUST ACCEPT 1.14±0.03 [.045±.001] SQUARE
POST AND REMAIN LOCKED IN POSITION.

- 4 IDENTIFICATION NUMBER FOR LAST CIRCUIT MAY
NOT APPEAR ON ALL ASSEMBLIES.

- 5 DIMENSIONS IN BRACKETS ARE IN INCHES.

- 6 HOUSING FEATURES ARE: FEED-THRU WITH LOCKING
RAMP.

- 7 OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

D

C

641229

B

A

7 SUPERCEDED				