

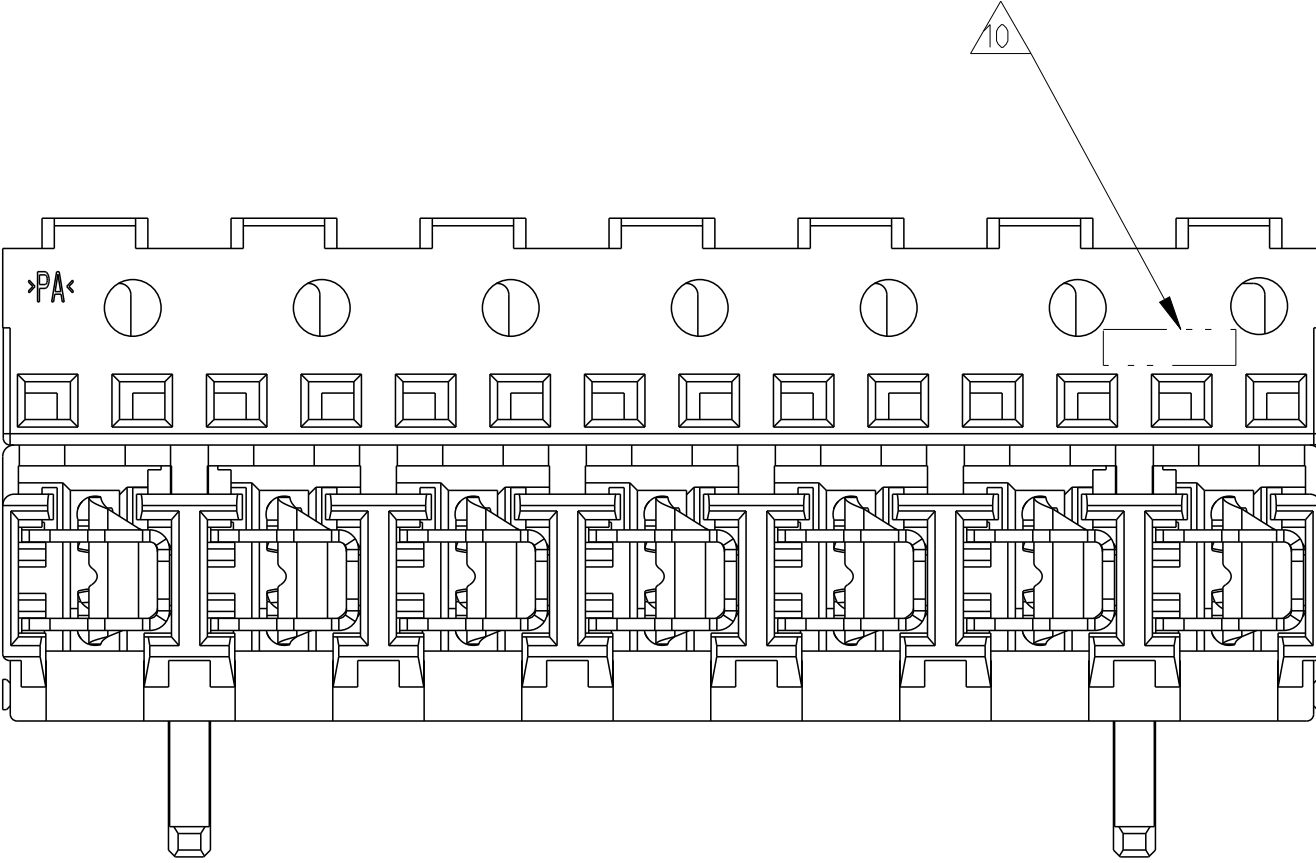
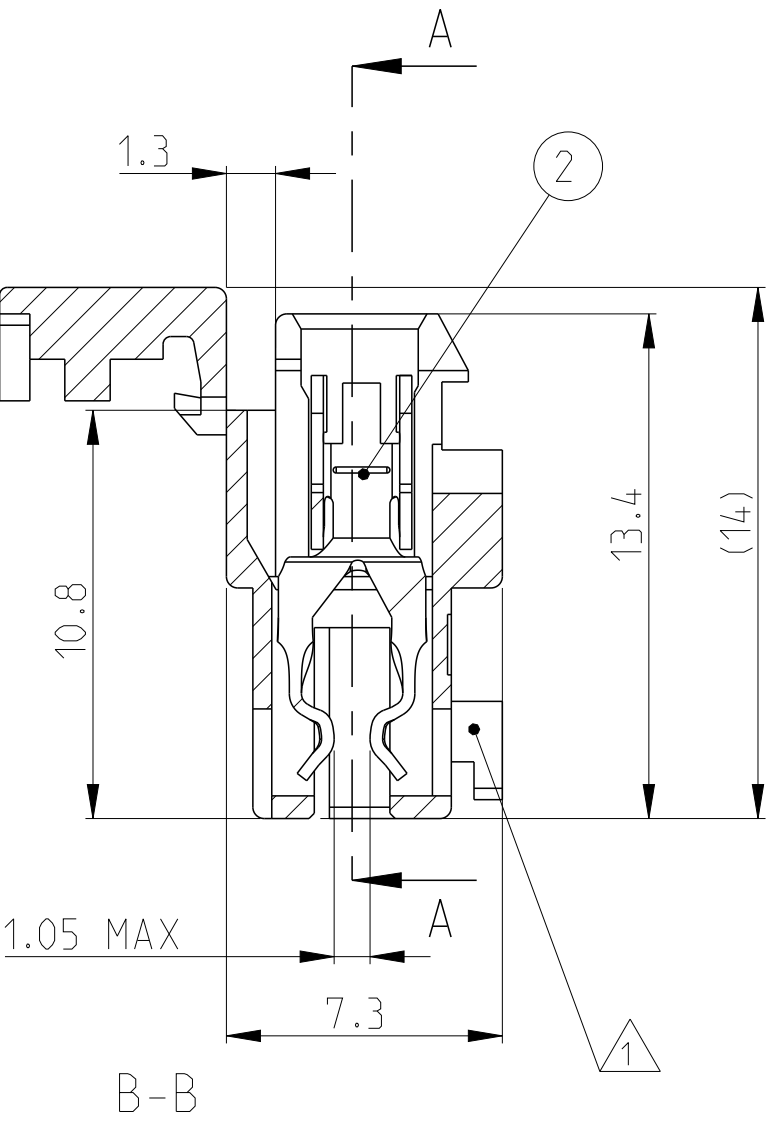
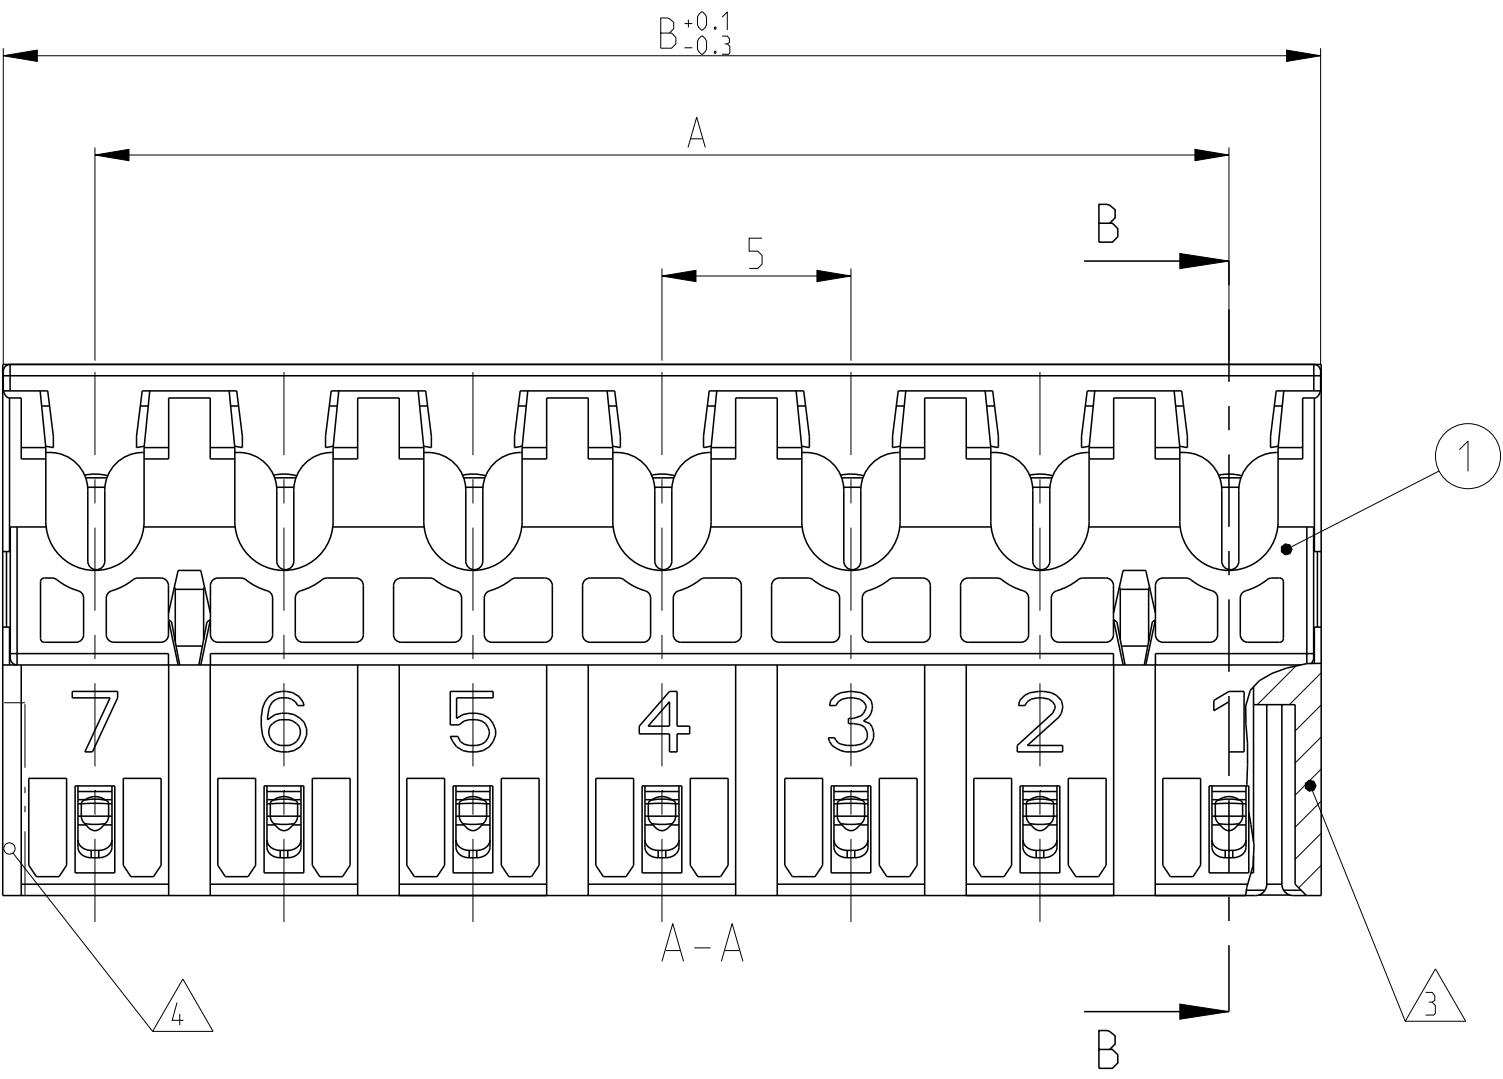
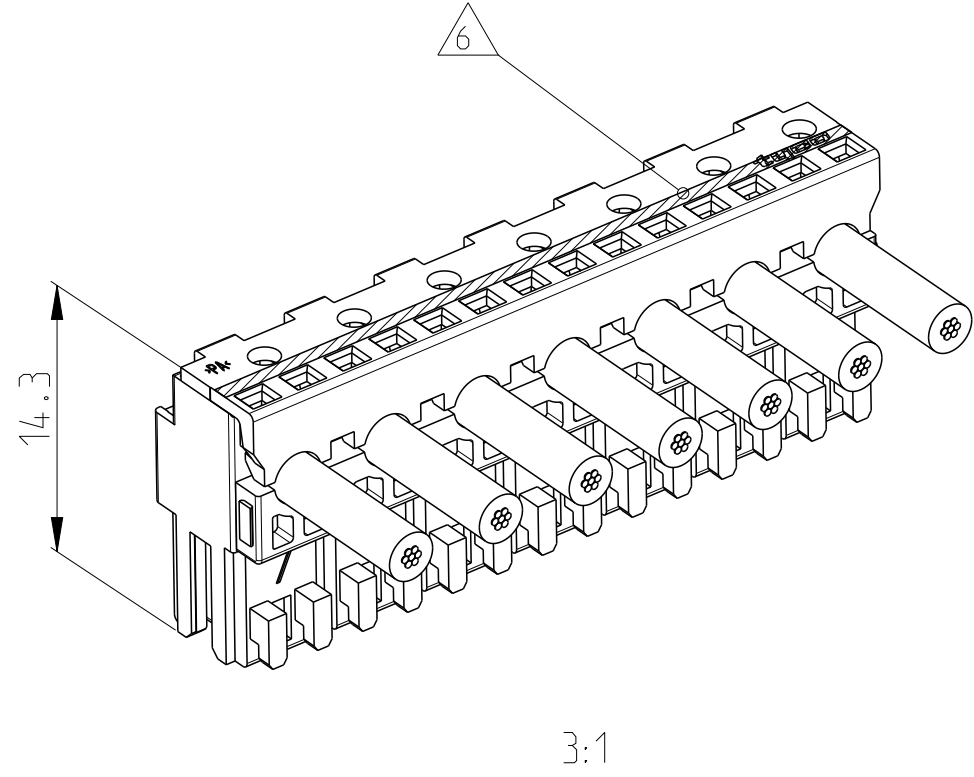
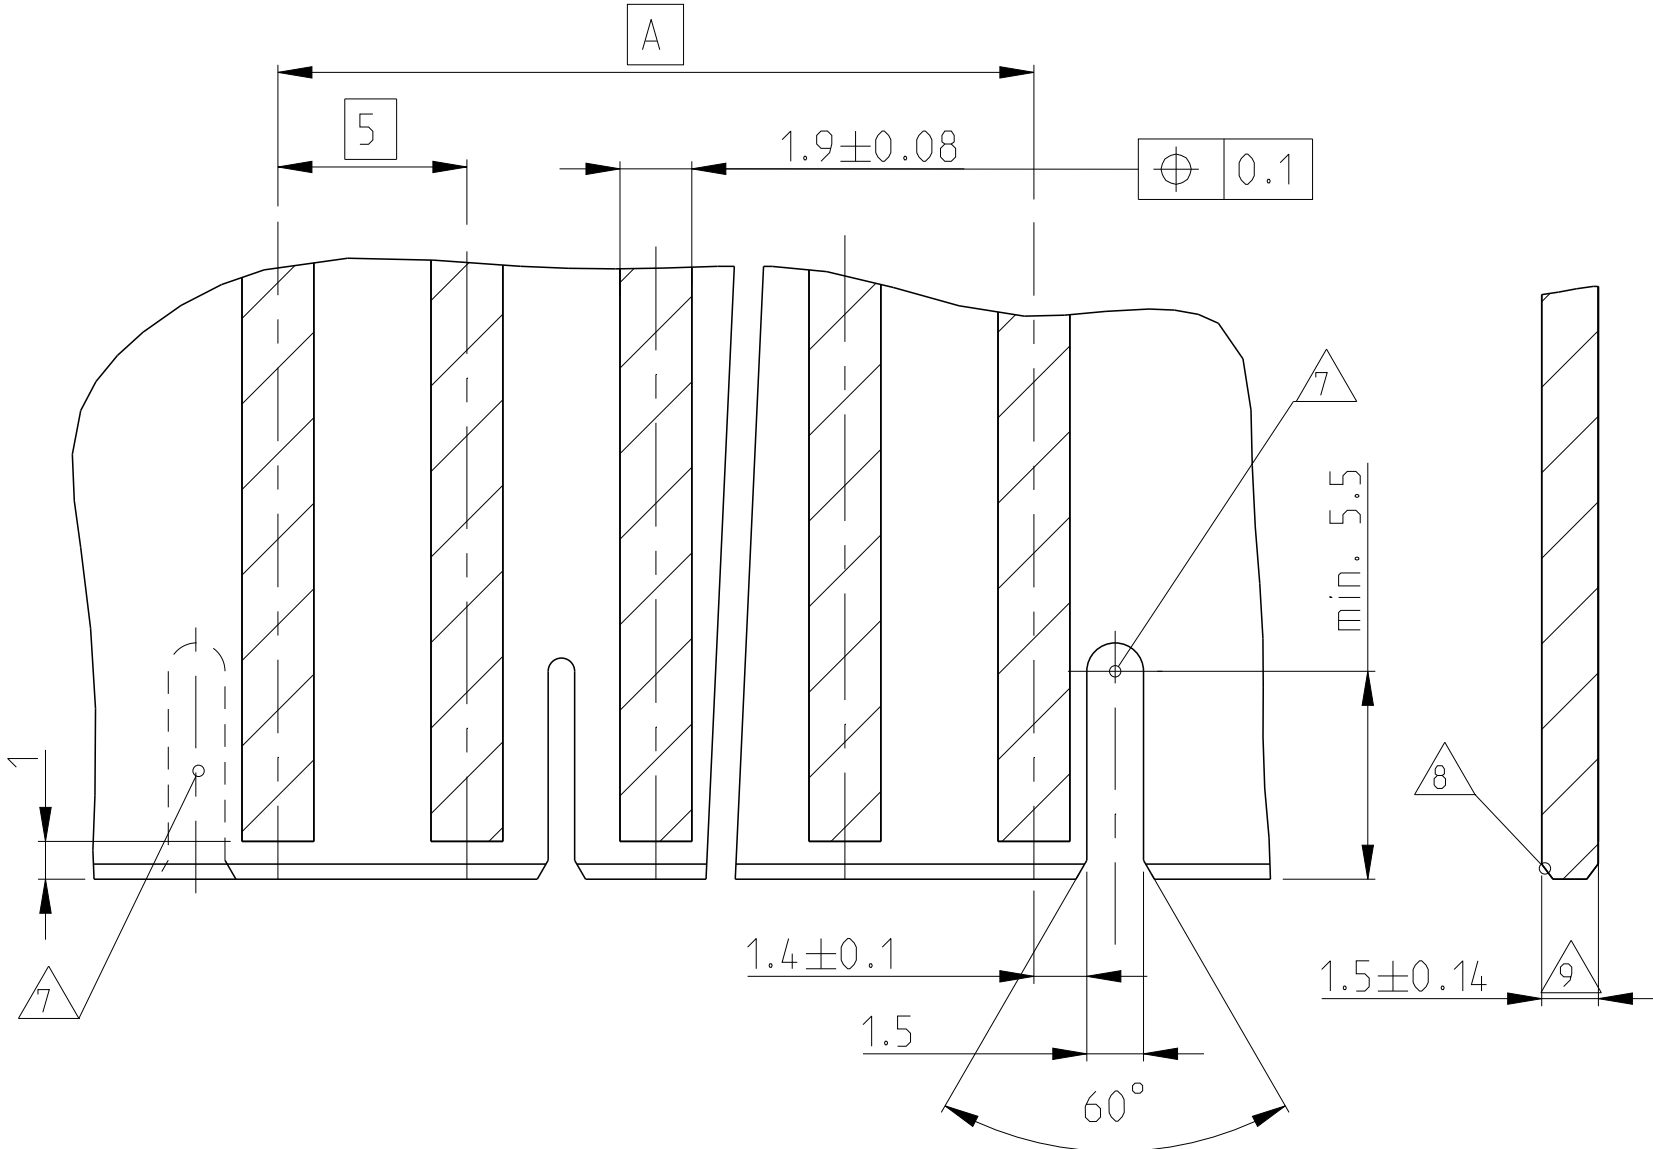


LOC	DIST	REVISIONS						
A1	-	P	LTR	DESCRIPTION	DATE	DWN	APVD	
			F2	ECR-17-006237	03MAY2017	IZ	RR	
			F3	ECR-17-006579	26MAY2017	IZ	RR	
			F4	ECR-19-014180	10OCT2019	MP	FL	
			F5	REVISED PER ECR-20-011072	10AUG2020	BD A	W W	

PCB LAYOUT KEYED / CONNECTED ONLY WITH ADDITIONAL FRAME
Leiterplattenanschluss kodiert / nur in Verbindung mit zusätzlichem Rahmen

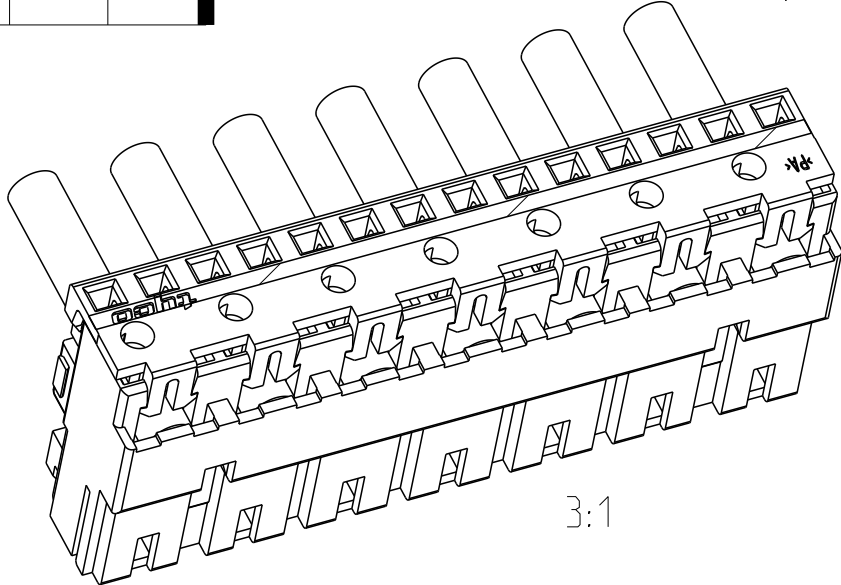

KEYING PLAN (VIEW Z) Kodierschema (Ansicht Z)

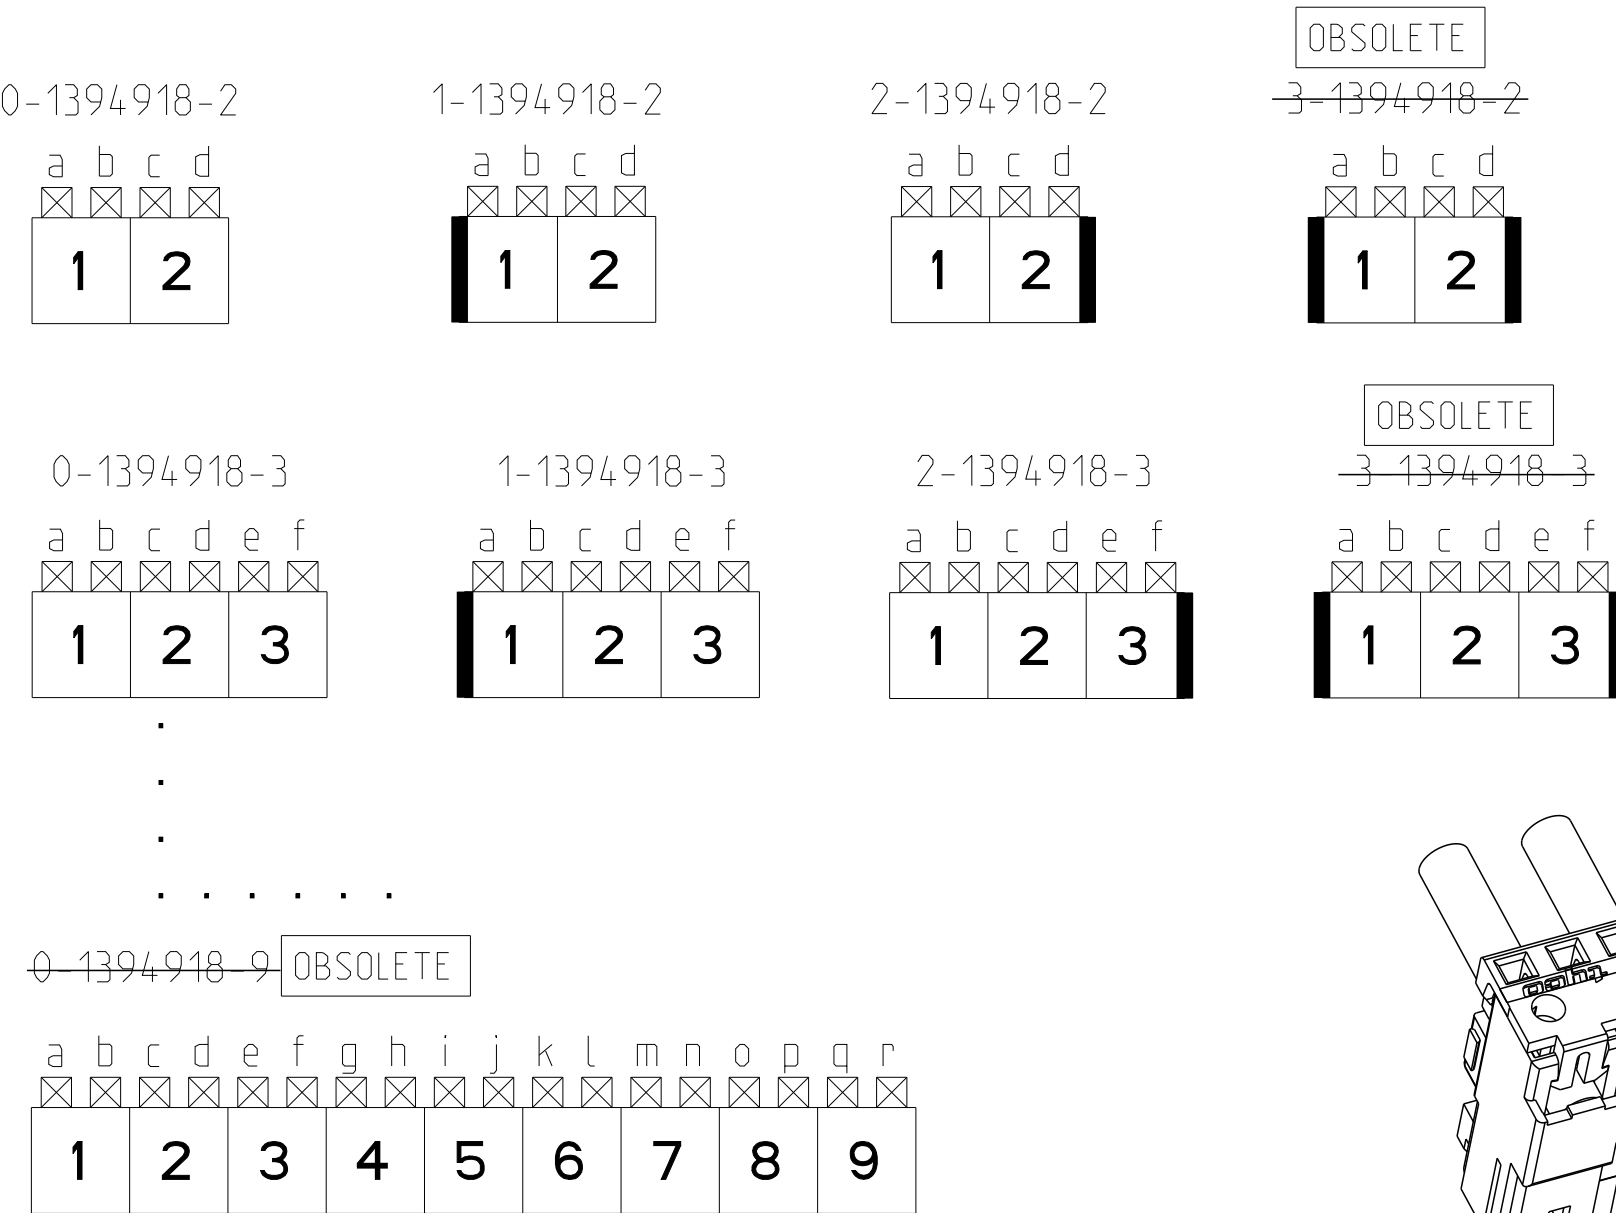

- 12 PART NOT YET RELEASED FOR PRODUCTION
- 11 OBSOLETE
- 10 TE LOGO
- 9 INCLUSIVE COPPER CLADDING:
Inklusive Kupferkaschierung:
- 8 PCB PREFERABLY CHAMFERED.
Leiterplatte vorzugsweise angefast.
- 7 SLOT FOR SIDE KEYING, 4, 4.
Schlitz fuer Seitenkodierung, 4, 4.
- 6 COLOUR MARKING ON TOP OF HOUSING OPTIONAL ON TERMINATION MACHINE
Farbmarkierung auf Gehäuseoberseite optional an Verarbeitungsmaschine
- 5 MATING PART: PCB (WITH FRAMES ACC. RAST 2.5 E.G. PN 964 575/576)
TABHEADER PN 1 534 787/788
Passender Gegenstecker: Leiterplatten (mit Rahmen nach RAST 2.5 z.B. 964 575/576)
Tabwannen Nr. 1 534 787/788
- 4 SIDE KEYING, ON LAST CAVITY
Seitenkodierung, an letzter Kammer
- 3 SIDE KEYING, on CAVITY 1
Seitenkodierung, an Kammer 1
- 2 WIRE RANGE: 0.35-0.75 mm²
Drahtgrößenbereich: 0.35-0.75 mm²
- 1 KEYING RIBS; CUTTING WITH TERMINATION MACHINE POSSIBLE
Kodierrippe; Schneiden auf der Verarbeitungsmaschine moeglich

9	40	44.9	-	-	0-1394918-9 ¹¹
8	35	39.9	-	-	0-1394918-8 ¹¹
7	30	34.9	-	-	0-1394918-7
6	25	29.9	-	-	0-1394918-6
5	20	24.9	-	-	0-1394918-5
4	15	19.9	-	-	0-1394918-4
3	10	14.9	X	X	3-1394918-3 ¹¹
3	10	14.9	X	-	2-1394918-3
3	10	14.9	-	X	1-1394918-3
3	10	14.9	-	-	0-1394918-3
2	5	9.9	X	X	3-1394918-2 ¹¹
2	5	9.9	X	-	2-1394918-2
2	5	9.9	-	X	1-1394918-2
2	5	9.9	-	-	0-1394918-2
POS. Polzahl	DIM A	DIM B	⁴ KEYING	³ KEYING	TE P/N
2	SEE TABLE	CONTACT		CuNiSi	
1		HOUSING		PA 6.6 UL94 V-0	
POS.	TE P/N	DESCRIPTION		MATERIAL	COLOUR/FINISH

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN A. Weber	10MAY2001		 TE Connectivity	
DIMENSIONS:		CHK B. Schnaubelt	10MAY2001			
mm	TOLERANCES UNLESS OTHERWISE SPECIFIED:	APVD T. Klenner	10MAY2001		NAME	
		PRODUCT SPEC		AMP DUOPLUG POWER		
	0 PLC ±0.2 1 PLC ±0.2 2 PLC ±0.2 3 PLC ±0.2 4 PLC ±0.2 ANGLES ±1°	108-18780		FEMALE CONNECTOR (STANDARD VERSION)		
		APPLICATION SPEC		-		
MATERIAL	FINISH	116-18458		RESTRICTED TO		
		WEIGHT -		A1 00779 ©=1394918		
CUSTOMER DRAWING			SCALE	5:1	SHEET	1 of 1
			REV F5			