




LOC	DIST	REVISIONS				
BD	95	P	LTR	DESCRIPTION	DATE	OWN
			B	REVISED PER ECO-14-018700	17DEC2014	AP

D


C

B

A

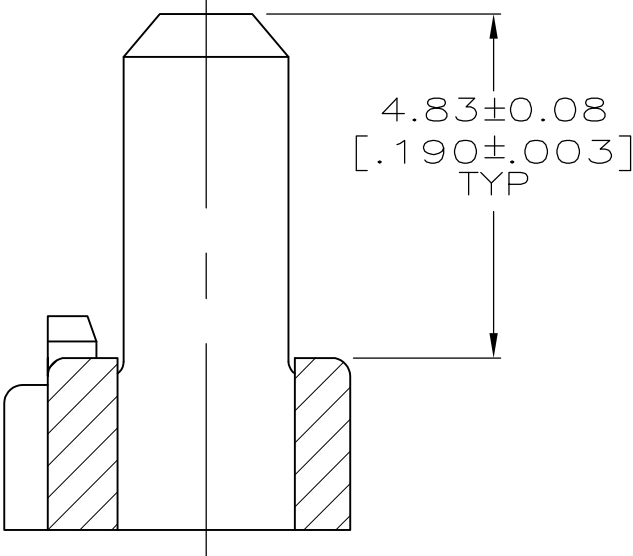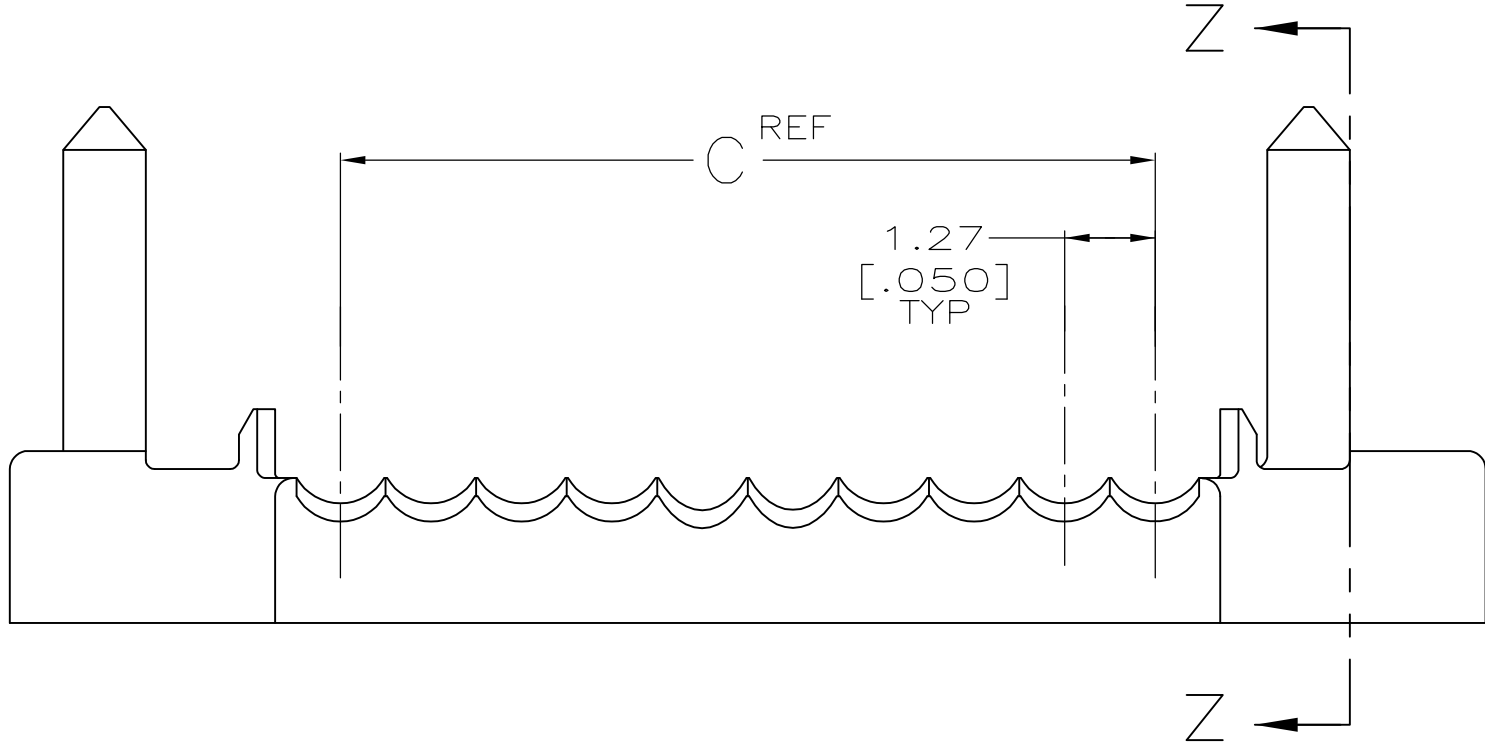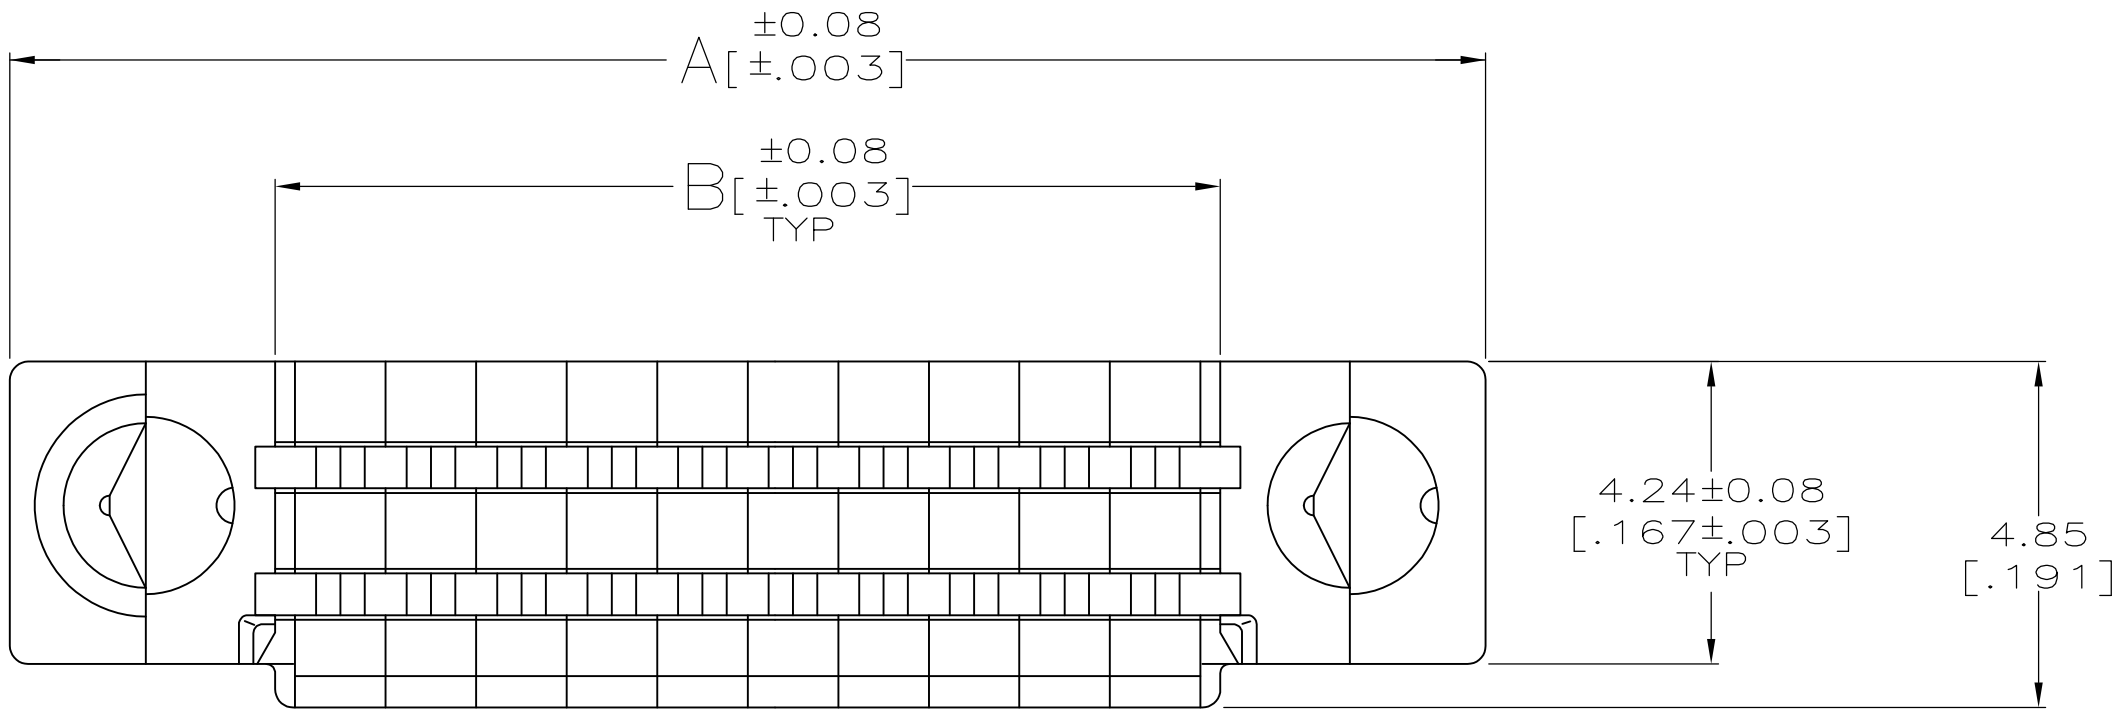

SECTION Z-Z

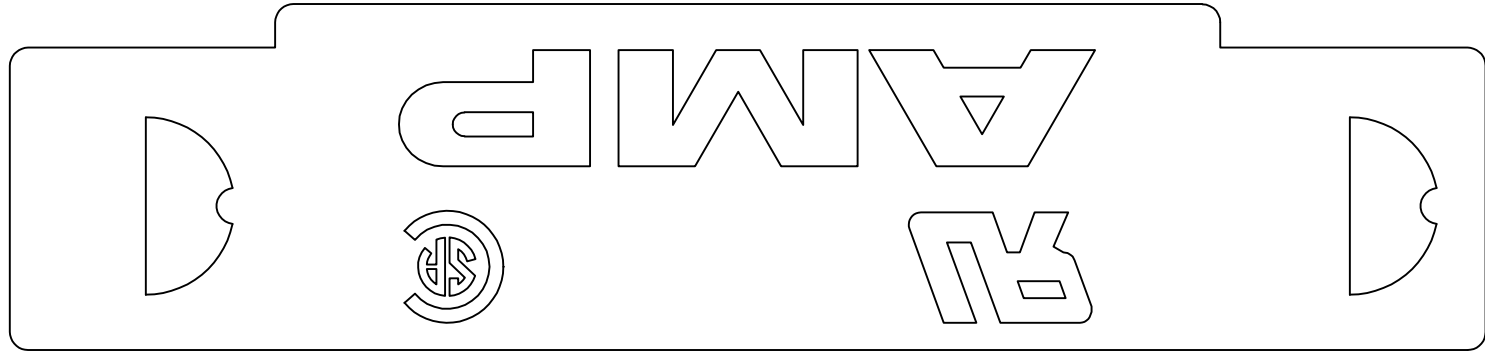

- 1 POLYESTER, UL 94V-0 RATED, BLACK.
- 2 RECOMMENED WIRE: 28 OR 30 AWG SOLID OR 7 STRAIN, 0.74- 0.91 [.029- .036] INSULATION DIAMETER. WIRE MUST BE APPROVED BY TE INC.
- 3 TWO COVERS REQUIRED PER CONNECTOR ASSEMBLY.

OBSOLETE	21.59 [.850]	23.42 [.922]	30.86 [1.215]	36	1-749108-1
	15.24 [.600]	17.07 [.672]	24.51 [.965]	26	1-749108-0
	74.93 [2.950]	76.76 [3.022]	84.20 [3.315]	120	749108-9
	62.23 [2.450]	64.06 [2.522]	71.50 [2.815]	100	749108-8
	49.53 [1.950]	51.36 [2.022]	58.80 [2.315]	80	749108-7
	41.91 [1.650]	43.74 [1.722]	51.18 [2.015]	68	749108-6
	36.83 [1.450]	38.66 [1.522]	46.10 [1.815]	60	749108-5
	30.48 [1.200]	32.31 [1.272]	39.75 [1.565]	50	749108-4
	24.13 [.950]	25.96 [1.022]	33.40 [1.315]	40	749108-3
	16.51 [.650]	18.34 [.722]	25.78 [1.015]	28	749108-2
	11.43 [.450]	13.26 [.522]	20.70 [.815]	20	749108-1
	C	B	A	NO OF POSN	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN C.OBERMAN 10/19/93	TE Connectivity		
		CHK R.STONE 10-19-93			
		APVD R.MIKLINSKI 12-6-93	NAME TERMINATING COVER, AMPLIMITE™ .050 SERIES		
DIMENSIONS: mm[INCHES]		TOLERANCES UNLESS OTHERWISE SPECIFIED:	PRODUCT SPEC 108-1228		
		0 PLC ± - 1 PLC ± - 2 PLC ± 0.13 [.005] 3 PLC ± - 4 PLC ± - ANGLES ± ± - FINISH -	APPLICATION SPEC 114-40029		
MATERIAL 1		WEIGHT -	SIZE A2		
		CUSTOMER DRAWING	CAGE CODE 00779		
			DRAWING NO G-749108		
			RESTRICTED TO -		
			SCALE 10:1		
			SHEET 1 of 1		
			REV B		