

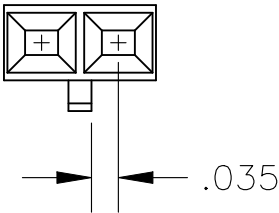
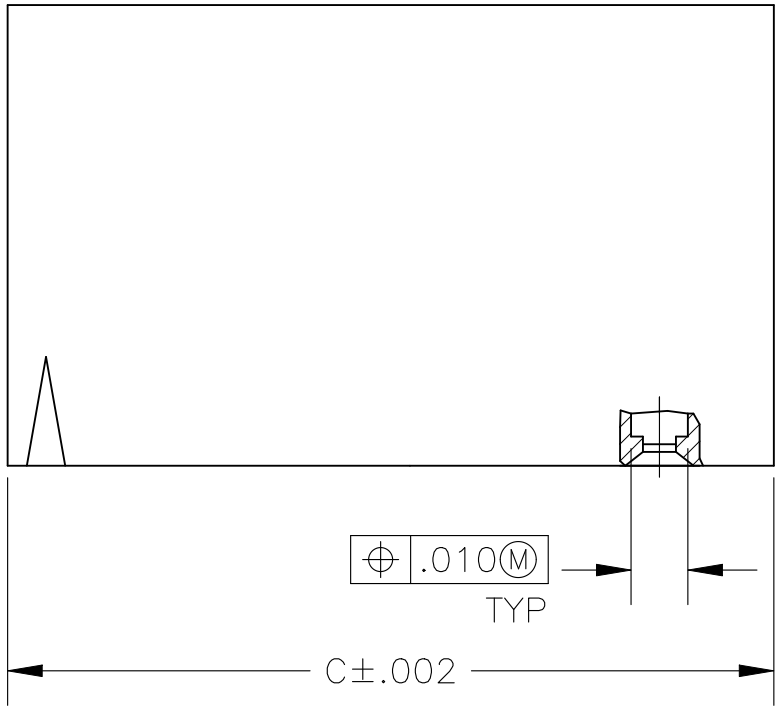
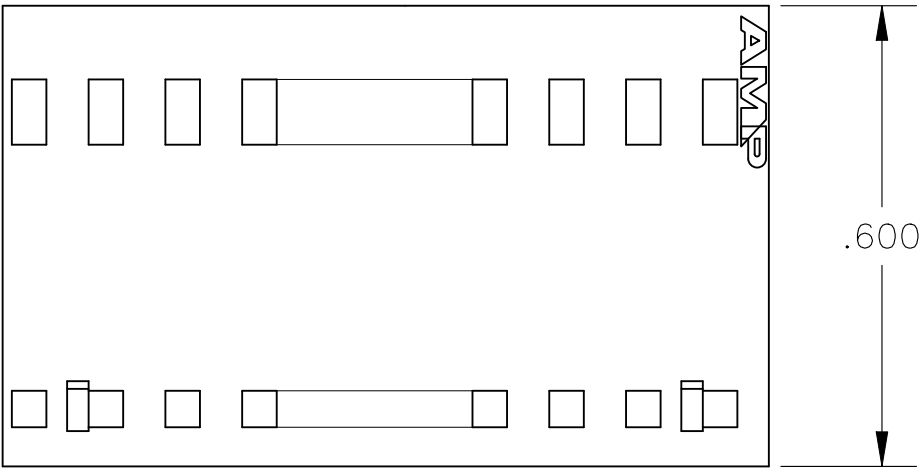


REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	G3	PART STATUS CHANGE TO DISCONTINUNACE	11AUG2026	NS	PS

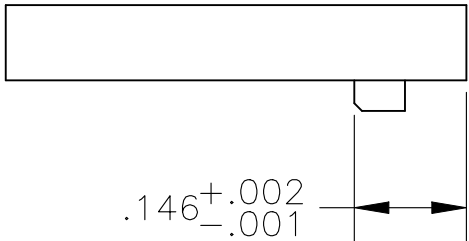

DETAIL FOR -1 ONLY
(2 POSITION)

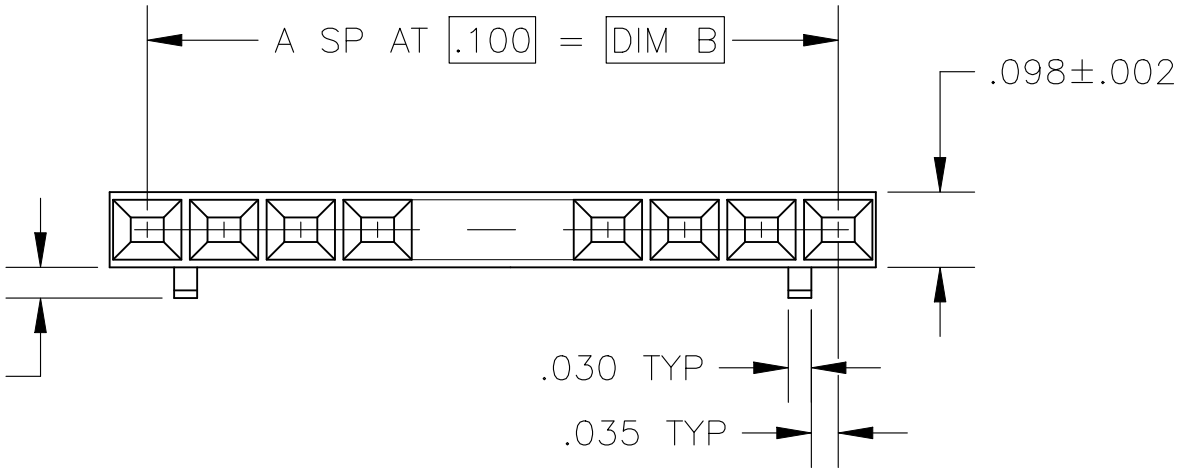

OBSOLETE	2.498	2.400	24	25	2-104503-4
OBSOLETE	2.398	2.300	23	24	2-104503-3
OBSOLETE	1.998	1.900	19	20	1-104503-9
OBSOLETE	1.598	1.500	15	16	1-104503-5
OBSOLETE	1.498	1.400	14	15	1-104503-4
OBSOLETE	1.398	1.300	13	14	1-104503-3
OBSOLETE	1.298	1.200	12	13	1-104503-2
	1.198	1.100	11	12	1-104503-1
OBSOLETE	1.098	1.000	10	11	1-104503-0
	.998	.900	9	10	104503-9
OBSOLETE	.898	.800	8	9	104503-8
	.798	.700	7	8	104503-7
	.698	.600	6	7	104503-6
OBSOLETE	.598	.500	5	6	104503-5
	.498	.400	4	5	104503-4
	.398	.300	3	4	104503-3
	.298	.200	2	3	104503-2
	.198	.100	1	2	104503-1
	C	B	A	NO OF POSN	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:
INCHES

MATERIAL
FLAME RETARDANT
THERMOPLASTIC, COLOR: BLACK

FINISH
-

TOLERANCES, UNLESS
OTHERWISE SPECIFIED:

0 PLC ± -
1 PLC ± -
2 PLC ± -
3 PLC ± .005
4 PLC ± -
ANGLES ± -

DWN
D KEITZER
12-21-88

CHK
H. MOLL
12-22-88

APVD
C. SINISI
12-22-88

PRODUCT SPEC
108-25034

APPLICATION SPEC
114-25026

WEIGHT
0.000000

CUSTOMER DRAWING

TE Connectivity

PIN HOUSING, AMPMODU®
MTE, SINGLE ROW, .100 C/L,
WITH GUIDE RIBS

SIZE
A2

CAGE CODE
00779

DRAWING NO
C=104503

RESTRICTED TO
-

SCALE
4:1

SHEET
1 OF 1

REV
G3