
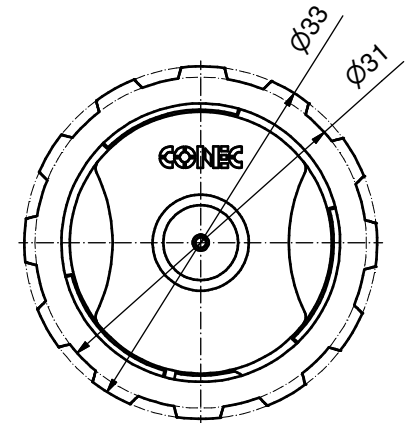
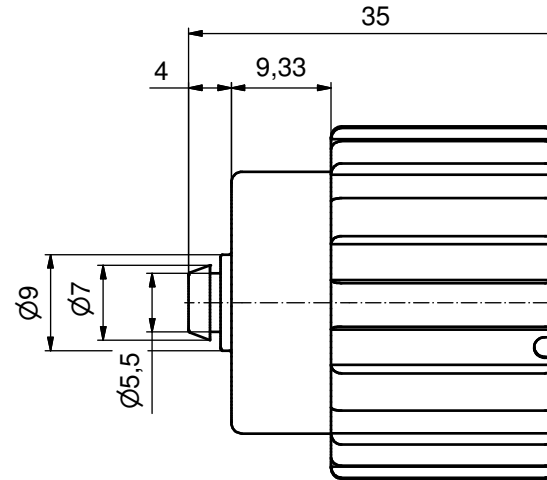
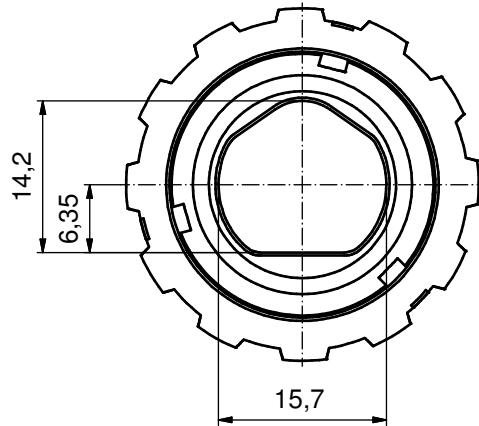


VIEWS WITHOUT TETHER

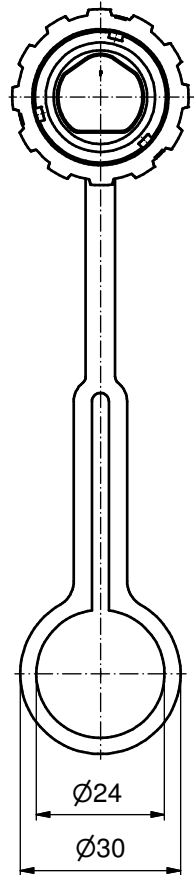


NOTES:

1. MATERIAL AND FINISH:

- COUPLER RING: PA GF (BLACK); UL94 V-0; UL (f1) RATED
- COVER HOUSING: PA GF (BLACK); UL94 V-0; UL (f1) RATED
- TETHER: PE-SW (BLACK),
- INTERFACIAL SEAL: SILICONE; COLOR: WHITE
- RETAINING RING: STAINLESS STEEL

2. OPERATING TEMPERATURE: -40 °C to +85 °C

3. IP67 RATED WHEN COVERED OR FULLY MATED WITH THE APPROPRIATE MATING CONNECTOR

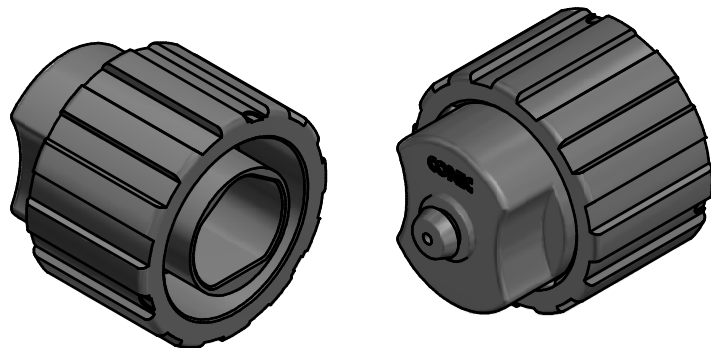

RoHS compliant

THIS DRAWING MAY NOT BE COPIED OR REPRODUCED IN ANY WAY, AND MAY NOT BE PASSED ON TO A THIRD PARTY WITHOUT WRITTEN PERMISSION. OWNERSHIP AND COPYRIGHT OF CONEC GmbH	DO NOT ALTER CAD DRAWING BY HAND				tolerance		 dim. in mm	scale:	2:1 (1:1)		
								material:	see notes		
						date	name	title:  Protective Cover for IP67 Duplex Power 3pos Female Cable Assembly			
					drawn	04.10.13	Schmidt				
					appd.	04.10.13	Strakerjahn				
					norm						
					d-old			dwg no:		DIN-	
	1 x b	Ä6182	06.06.2016	K.H.				17K1A426		A3	
	a	Original						sh: 1			
	rev.	description	date	name				part no:		17-400200	