

Notes:

1. Material and Finish:

- Coupler Ring: Polyester (Black); UL94 V-0
- Plug Housing: Polyester (Black); UL94 V-0
- Cable Gland: PA (Black), UL94 V-0
- Cable Gland Rubber Ring: NBR, Color: Black
- Cable Fitting: PA (Black), UL94 V-0
- Interfacial Seal: Silicone, Color: White

(f) Duplex LC Connector

- Housing: PEI, UL94 V-0,

(e) (b) Color: **SM Blue/MM Beige/APC SM Green**





- Inner Sub Assembly: Zirconia, Metal and PTFE
- Crimp Barrel: Brass, Nickel Plated
- Ferrule: Brass, Nickel Plated
- Dust Cap: PC, Color: White

(c) Duplex LC Clip: PC, Color: Black

- Operating Temperature: -40°C to +85°C

(h) 2. IP67/IP68 rated when covered or fully mated with the appropriate mating connector

(d) 3. Accept 4.5mm to 8.0mm outside diameter fiber optic cable

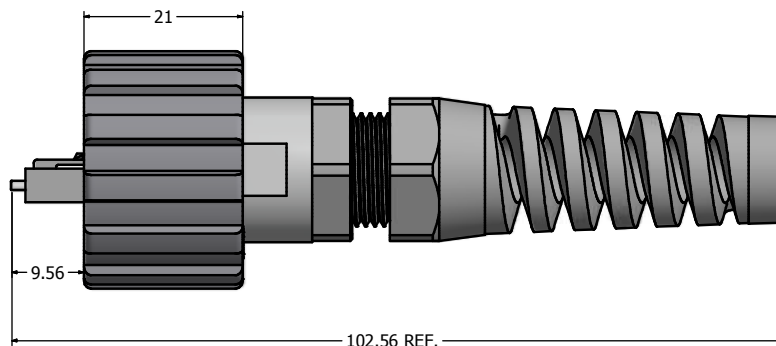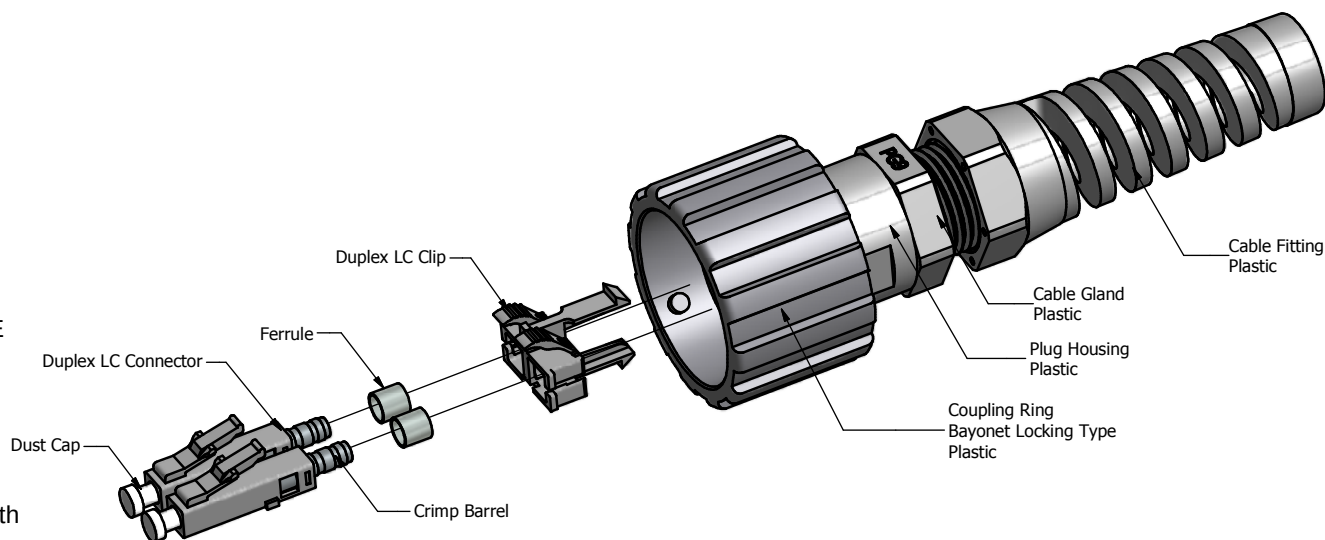

Description	Part Number
Single Mode (SM)	17-300030
Multi Mode (MM)	17-300040
(e) APC Single Mode (APC SM)	17-300110

RoHS Compliant

THIS DRAWING MAY NOT BE COPIED OR REPRODUCED IN ANY MANNER WITHOUT WRITTEN PERMISSION OF CONEC CORPORATION. OWNERSHIP AND COPYRIGHT OF CONEC CORPORATION DO NOT ALTER CAD DRAWING BY HAND	Customer:			Tolerance Unless otherwise specified		 Autodesk Inventor	Scale: 1.5:1	Dim. in mm
	Name	Title	Approval Date	9	0 PLC ±0.58 1 PLC ±0.38 2 PLC ±0.25 3 PLC ±0.10 ANGLES ±.3°		Material: See Notes	
h	1 x h	Dec/03/2015	Vincent Ke	2008	Date	Name	Title: IP67 Industrial Duplex LC Plug Kit Plastic Version	
g	1 x g	Sep/25/2013	Vincent Ke	Draw.	Jun. 06	Vincent Ke		
f	1 x f	Jul/12/2011	Vincent Ke	Appd.	Jun. 06	J. Chaudry		
e	2 x e	Nov/22/2010	Vincent Ke	Norm			Drawing No.: 17K1A003	
d	1 x d	Nov/03/2010	Vincent Ke	D-old				
c	1 x c	Jul/19/2010	Vincent Ke				Part No.: SEE P/N ABOVE	
a	original							
Rev.	Changes	Date	Name					DIN A3 Sheet 1/1