

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION 20
© COPYRIGHT 20 BY - ALL RIGHTS RESERVED.

REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	G	REVISED PER ECR-22-137850	17MAY2023	SKR	CM
	H	REVISED PER ECR-22-141796	08JUN2023	RS	CM

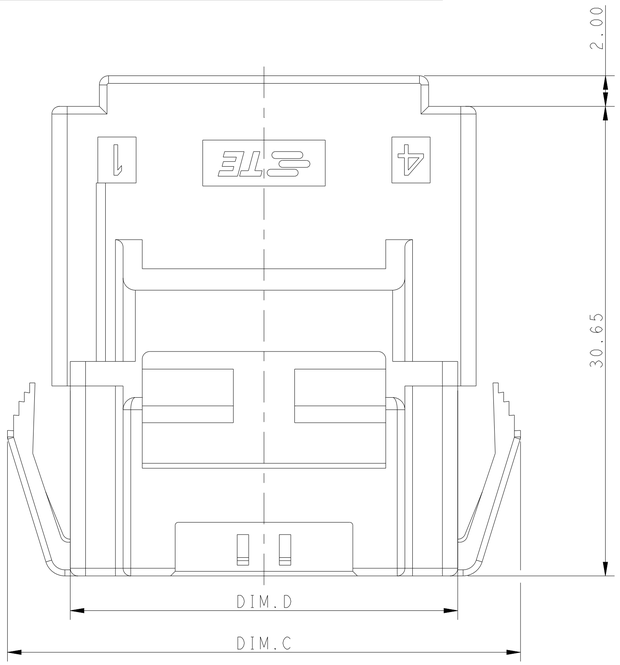

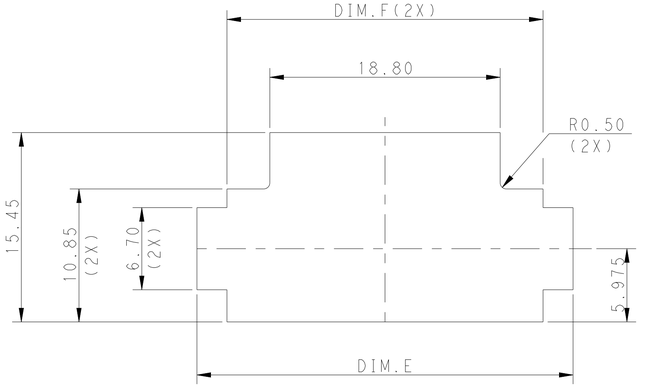

RECOMMENDED PANEL OPENING DIMENSIONS
FOR CAP HOUSING 1*5 AND 1*4 POSITIONS
(TOLERANCE: ±0.15mm)

1 MATERIAL:
LEVEL A:PA66 GLASS FILLED, COMPLY WITH GLOW WIRE REQUIREMENTS FOR PARTS OF NON-METALLIC MATERIAL SUPPORTING A CURRENT-CARRYING CONNECTION DETAILED IN IEC 60335-1, SECTION 30 (GWT),UL 94V-0
LEVEL B:PBT GLASS FILLED, HOT WIRE IGNITION (HWI) VERSION ARE MOLDED IN A RESIN THAT COMPLIES WITH TE HOT WIRE IGNITION TEST 109-32026 AND ARE RECOMMENDED FOR USE WITH HWI HOUSINGS THAT ALSO COMPLY, UL 94V-0

2 MATERIAL MARK:
LEVEL A:GWT,LEVEL B:HWT


3 APPLICABLE CONTACT P/N
TAB CONTACT:1971238/1971780/1971782/1971784/1971786/1971788-*,2238067-*


4 MATING CONN, P/N
PLUG HSG:*-2232265-*
TPA (LOCK PLATE):*-1971777-*


5 RECOMMENDED PANEL THICKNESS:1.0~2.0mm


6 LEVEL A MATERIAL IS SHOWN IN ALL VIEWS EXCEPT WHERE INDICATED BY NOTE 7.


7 LEVEL B MATERIAL, KEY A AND B ONLY, THESE END KEYS ARE RECESSED.

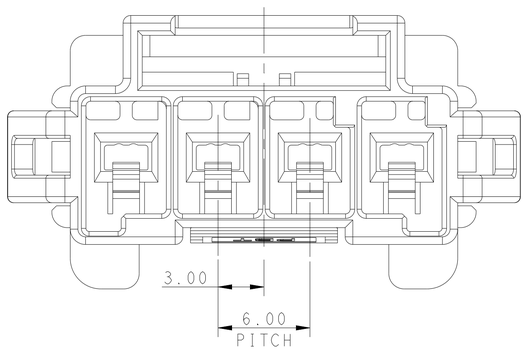

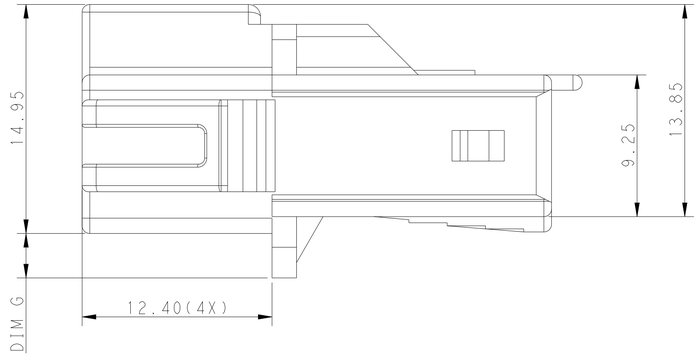


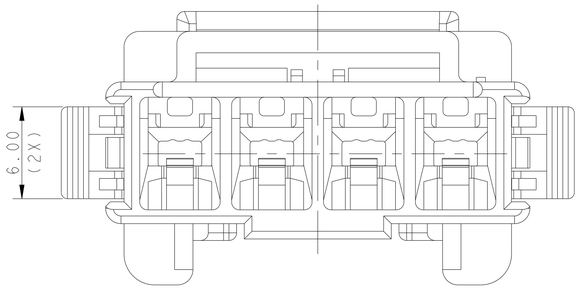

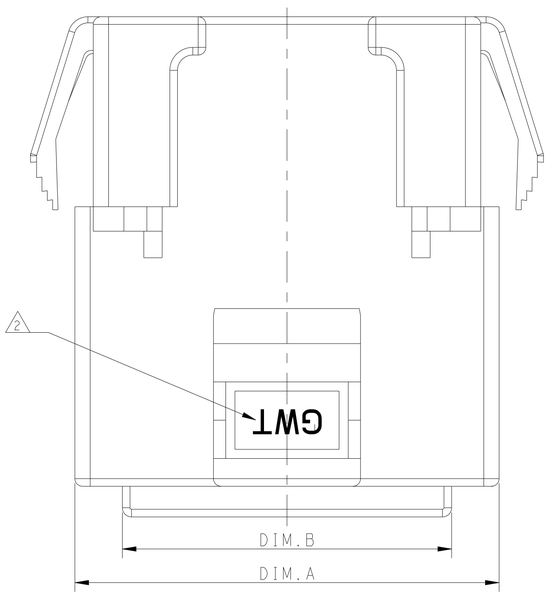

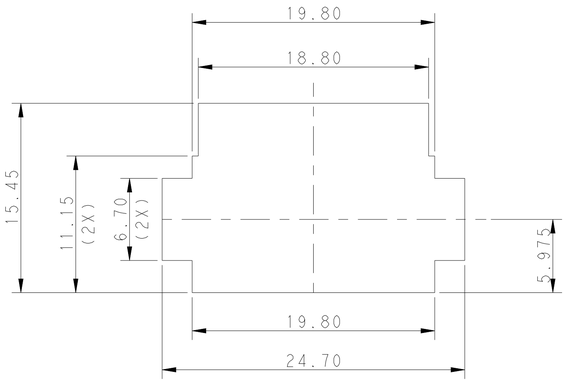

RECOMMENDED PANEL OPENING DIMENSIONS
FOR CAP HOUSING 1*3 POSITION
(TOLERANCE: ±0.15mm)



RECOMMENDED PANEL OPENING DIMENSIONS
FOR CAP HOUSING 1*2 POSITION
(TOLERANCE: ±0.15mm)

POS	Dim. A	Dim. B	Dim. C	Dim. D	Dim. E	Dim. F	Dim.G
1*5	33.70	27.50	39.5	31.30	36.70	31.80	2.9
1*4	27.70	21.50	33.5	25.30	30.70	25.80	2.9
1*3	21.70	15.50	27.5	19.30			2.5
1*2	15.70	9.50	21.5	13.30			1.1

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: mm

TOLERANCES UNLESS OTHERWISE SPECIFIED:
0 PLC ±-
1 PLC ±0.35
2 PLC ±0.25
3 PLC ±0.20
4 PLC ±-
ANGLES ±-

MATERIAL 1 2
FINISH - -

DWN TOMMY WU 26MAR2013
CHK HAPYE WU 26MAR2013
APVD YUHONG MAO 26MAR2013
PRODUCT SPEC 108-106118
APPLICATION SPEC 114-106118
WEIGHT -

TE Connectivity

NAME CAP HOUSING,PANEL MOUNT,SINGLE ROW POWER TRIPLE LOCK
-


SIZE A1 | CAGE CODE 00779 | DRAWING NO C-2232263 | RESTRICTED TO -


Customer Drawing | SCALE 5:1 | SHEET 1 OF 2 | REV H

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION 20
© COPYRIGHT 20 BY - ALL RIGHTS RESERVED.


REVISIONS


P	LTR	DESCRIPTION	DATE	DWN	APVD
	-	SEE SHEET 1	-	-	-

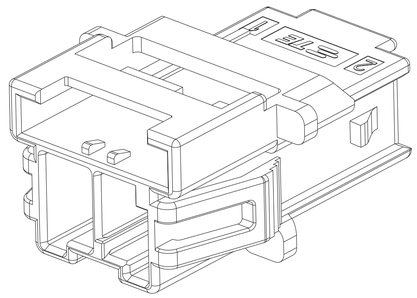





1*2 POSITIONS

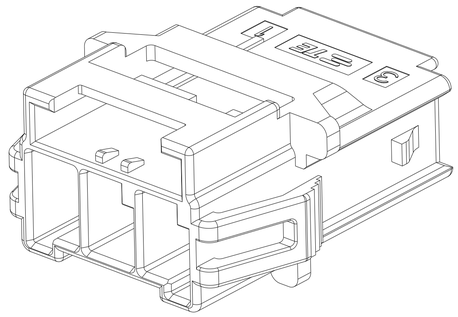

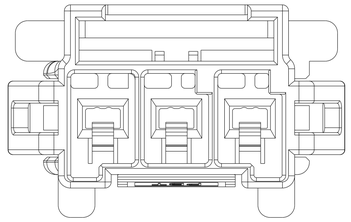



1*3 POSITIONS

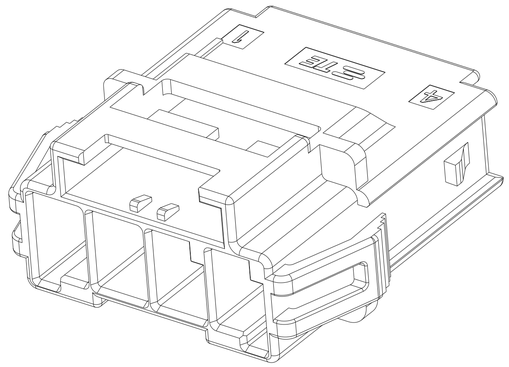

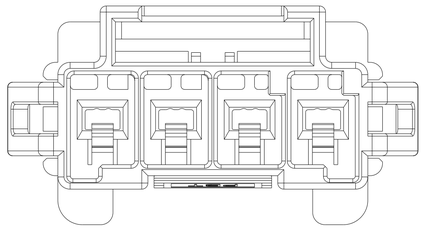


1*4 POSITIONS

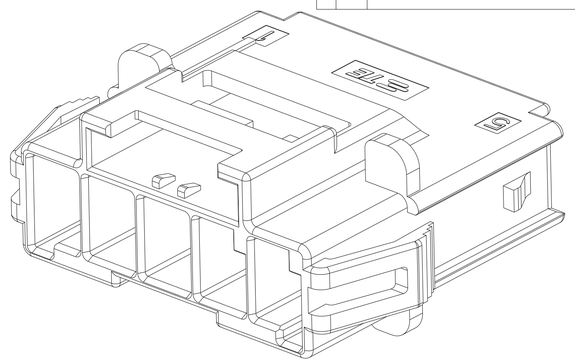


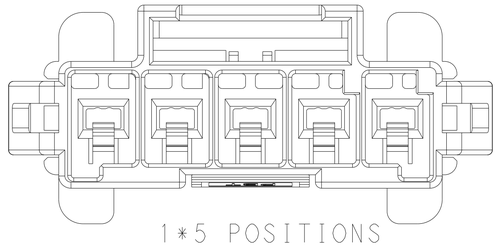


1*5 POSITIONS




KEYING FOR 1*2 POS.

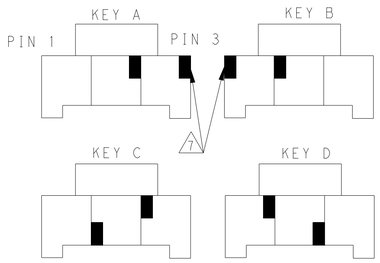

KEYING FOR 1*3 POS.

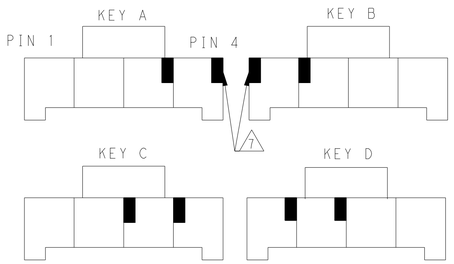

KEYING FOR 1*4 POS.

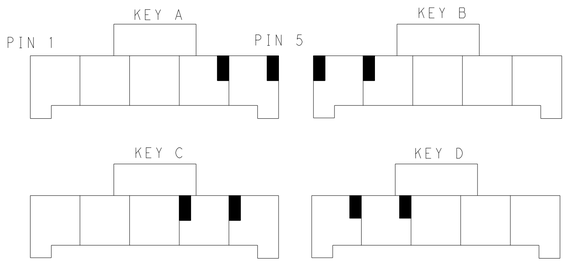

KEYING FOR 1*5 POS.

1*5	LEVEL A	DARK GREY	KEY A	5-2232263-7
		BROWN	KEY B	6-2232263-7
		GREEN	KEY C	7-2232263-7
		ORANGE	KEY D	8-2232263-7
1*4	LEVEL B	BLACK	KEY A	1-2232263-3
	LEVEL A	DARK GREY	KEY A	5-2232263-4
		BROWN	KEY B	6-2232263-4
		GREEN	KEY C	7-2232263-4
		ORANGE	KEY D	8-2232263-4
1*3	LEVEL B	BLACK	KEY A	1-2232263-2
	LEVEL A	DARK GREY	KEY A	5-2232263-3
		BROWN	KEY B	6-2232263-3
		GREEN	KEY C	7-2232263-3
		ORANGE	KEY D	8-2232263-3
1*2	LEVEL A	DARK GREY	KEY A	5-2232263-2
		BROWN	KEY B	6-2232263-2
		GREEN	KEY C	7-2232263-2
		ORANGE	KEY D	8-2232263-2
	LEVEL B	NATURAL	KEY B	2-2232263-1
		BLACK	KEY A	1-2232263-1
POS.	MATERIAL	COLOR	KEY	P/N

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: mm

TOLERANCES UNLESS OTHERWISE SPECIFIED:
0 PLC ±-
1 PLC ±0.35
2 PLC ±0.25
3 PLC ±0.20
4 PLC ±-
ANGLES ±-

MATERIAL 1 2

FINISH - -

DWN TOMMY WU 26MAR2013
CHK HAPYE WU 26MAR2013
APVD YUHONG MAO 26MAR2013

TE Connectivity

NAME CAP HOUSING,PANEL MOUNT,SINGLE ROW POWER TRIPLE LOCK

PRODUCT SPEC 108-106118 -

APPLICATION SPEC 114-106118

WEIGHT -

SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A1	00779	C-2232263	-

Customer Drawing | SCALE 5:1 | SHEET 2 OF 2 | REV H

4805 (3/13)