


REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
B		Manufacturing Location Change	09APR2026	M.S	J.M

D

C

B


A

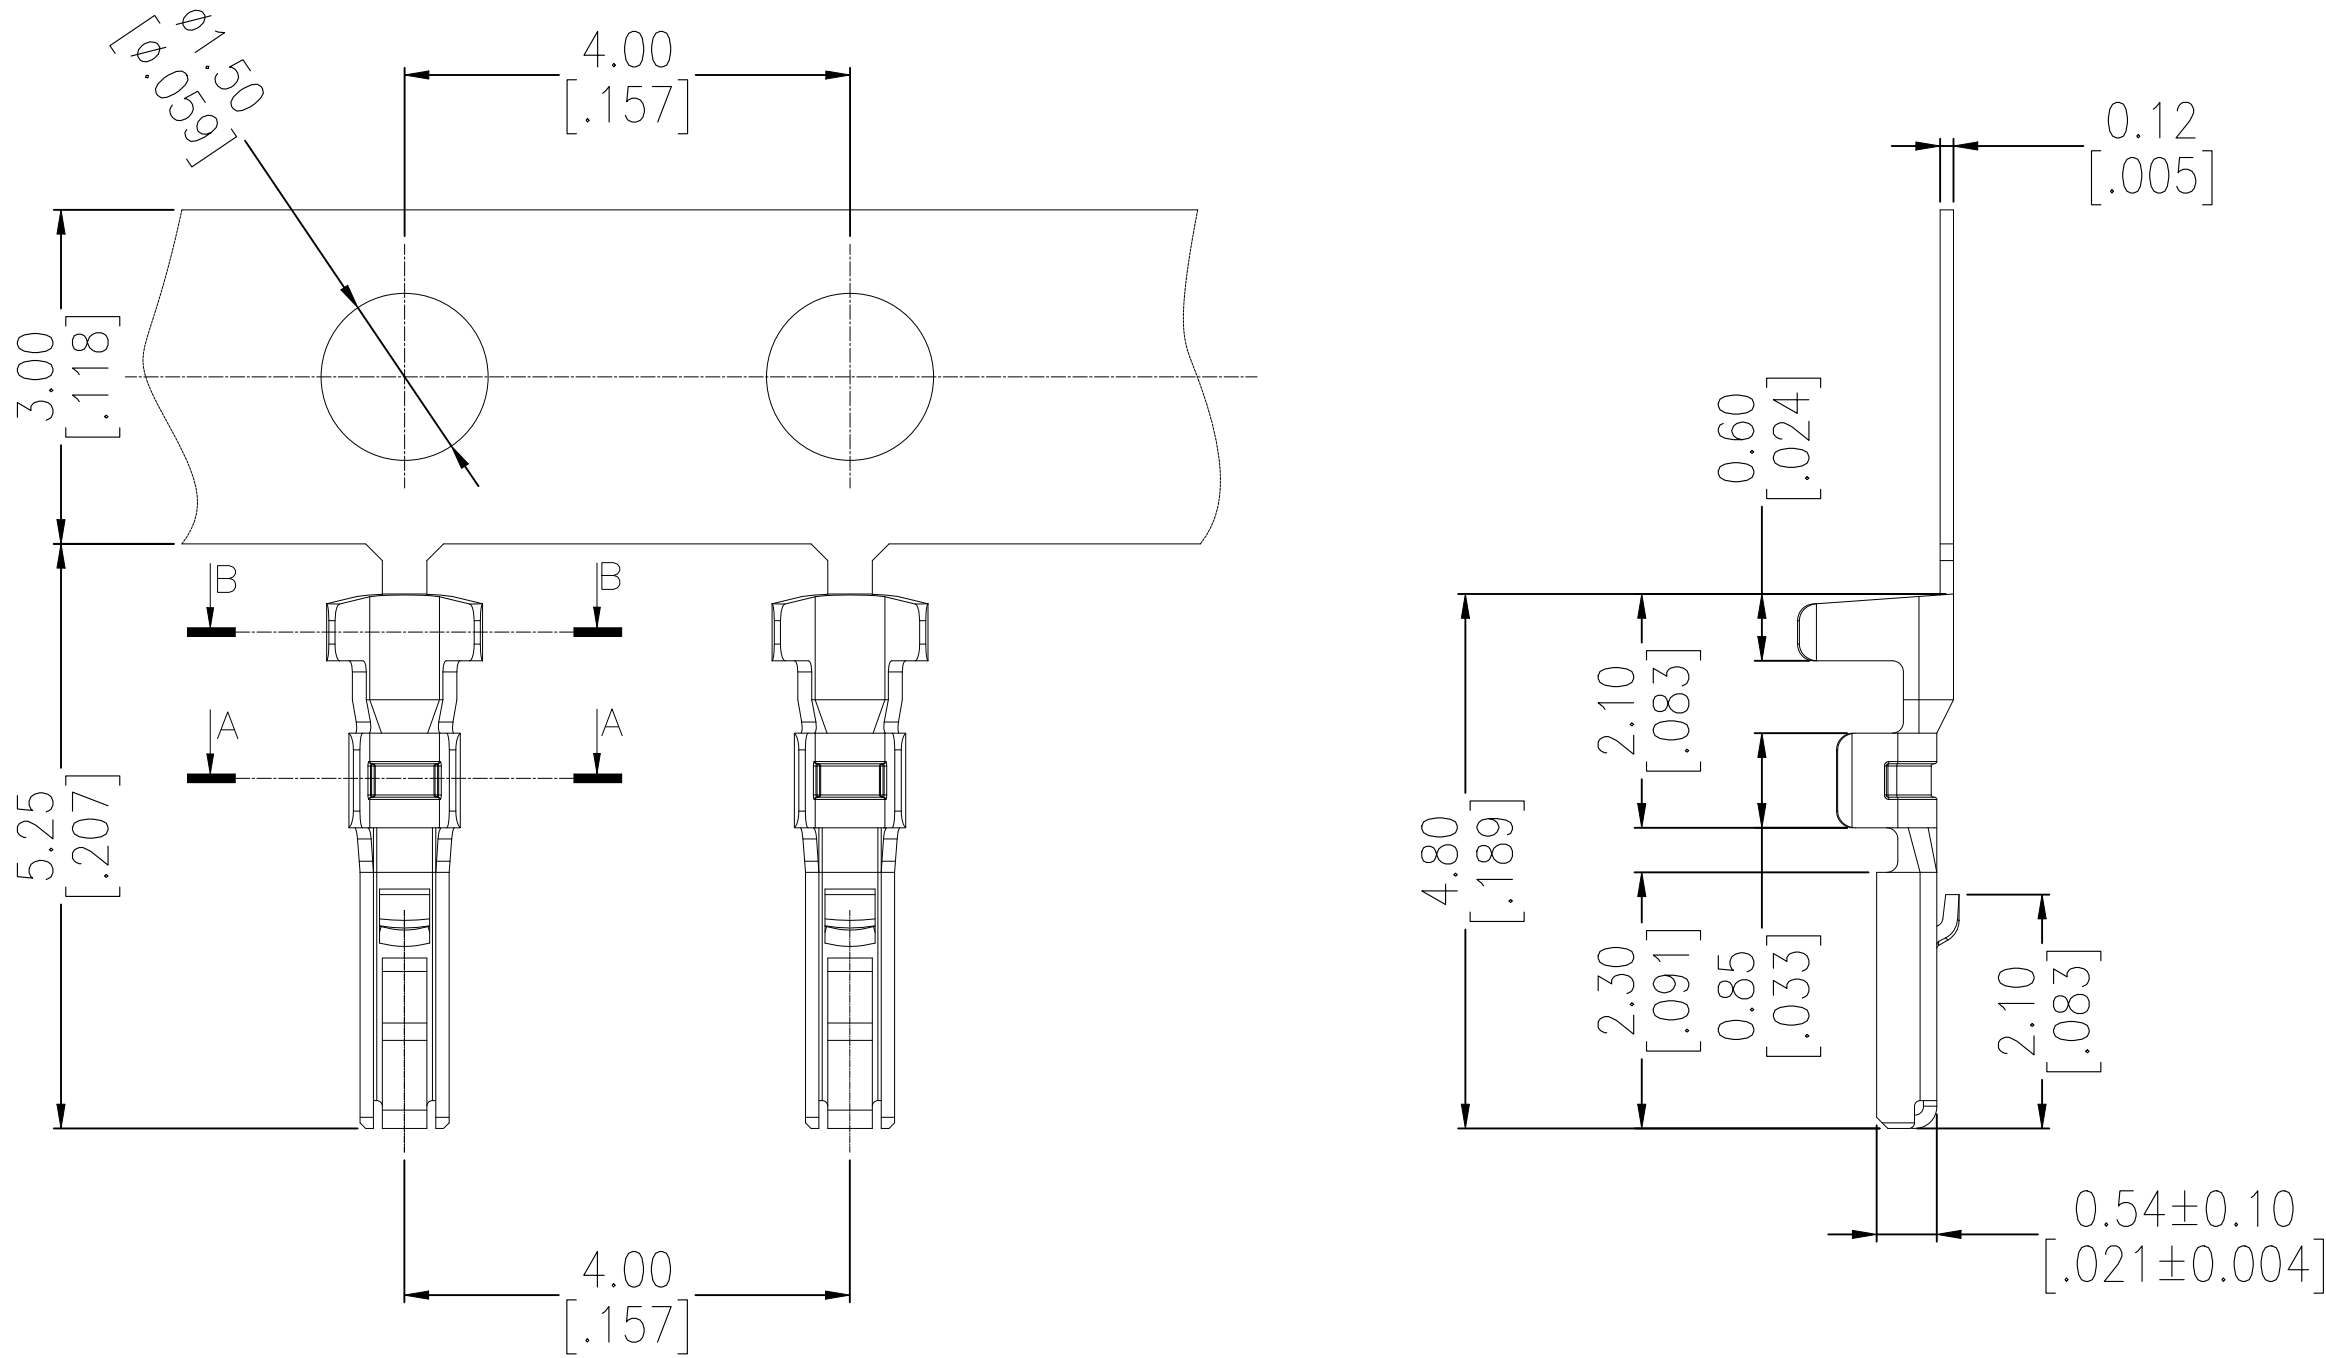

- NOTES:
- Current Rating: 1.0A AC/DC
 - Voltage Rating: 50V AC/DC
 - Temperature Range: -40°C to +105°C
 - Contact Resistance: 30mΩ Max.
 - Insulation Resistance: 100MΩ Min.
 - Withstanding Voltage: 500V AC/Minute

Material: Phosphor Bronze
Plating:
TYPE A: PURE TIN, 40u" MIN
TYPE B: 0.5u" MIN GOLD FLASH ON CONTACT AREA
50u" MIN. NICKEL UNDER-PLATING OVERALL.


Insulation O.D.:Ø0.80to1.0mm(Max)
Fit wire Range: 28#~32#AWG(2390147-1 & 2)
26#AWG(2390147-3 & 4)

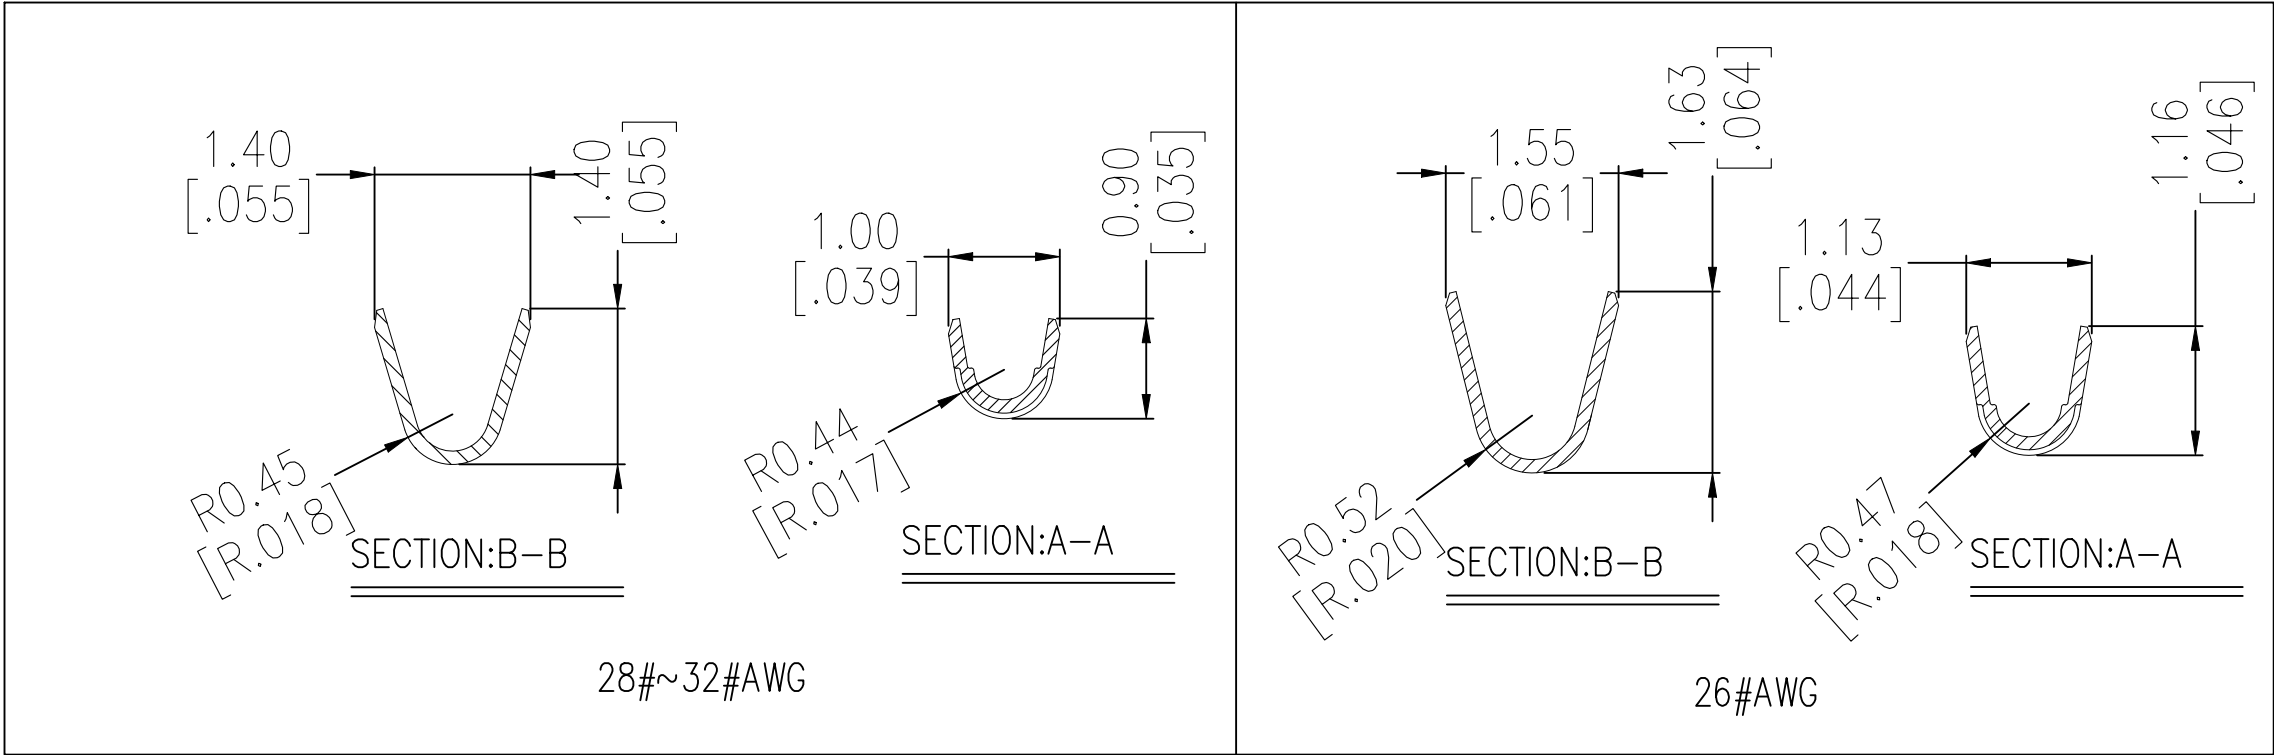

26 AWG	2390147-4	2390147-3
28-32 AWG	2390147-2	2390147-1
Wire Gauge	GOLD FLASH	PRE-TIN
	PLATING SPEC	PART NUMBER


THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN Tommy Qian 12APR2021	TE Connectivity Ltd.	
DIMENSIONS: mm		CHK Niki Shi 12APR2021		
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD Niki Shi 12APR2021	NAME 1.25mm PITCH WTB Conn. CABLE CONTACT	
0 PLC ± 0.5		PRODUCT SPEC		
1 PLC ± 0.25		APPLICATION SPEC	SIZE CAGE CODE DRAWING NO RESTRICTED TO	
2 PLC ± 0.15		—	A2 00779 C=2390147	
3 PLC ± 0.1		—	SCALE N/A SHEET 1 of 2 REV B	
4 PLC ± —		WEIGHT N/A		
ANGLES ± 2°		CUSTOMER DRAWING		
FINISH				
NOTE 1		NOTE 2		

REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	-	SEE SHEET 1	-	-	-

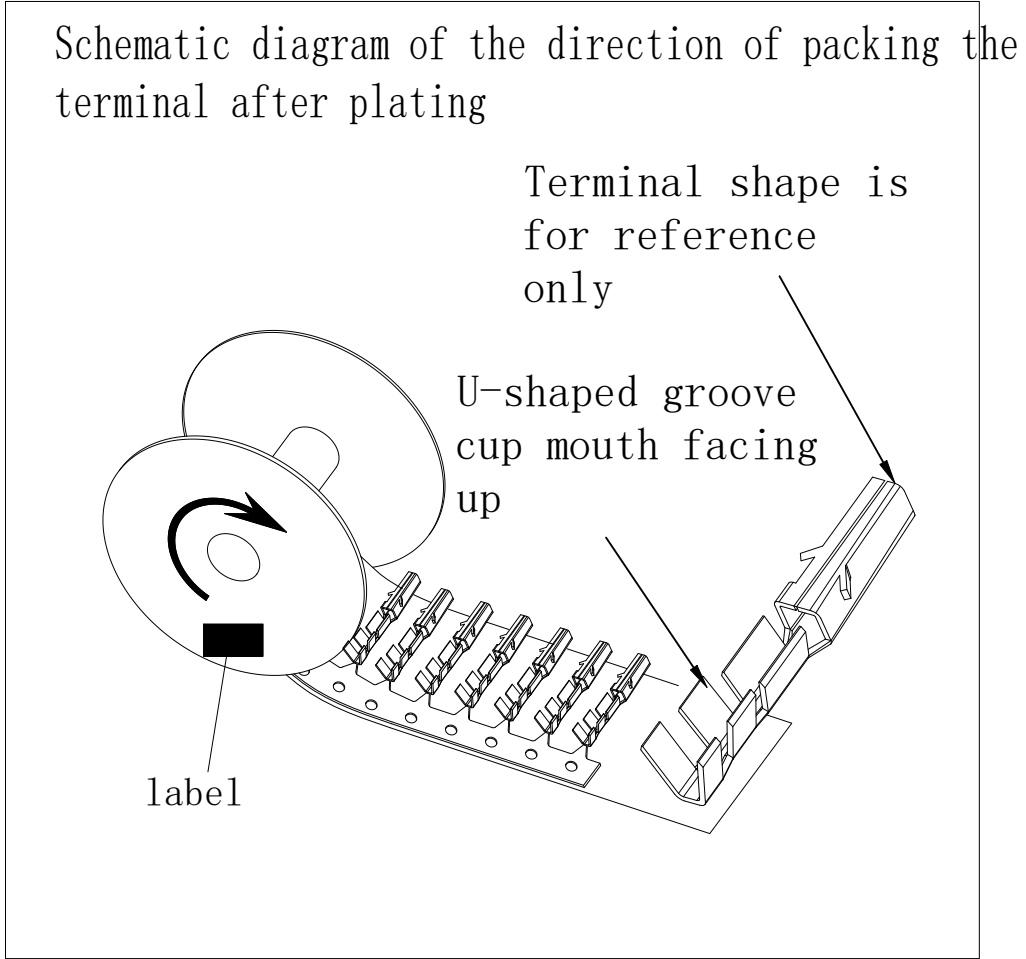


the outermost paper tape


No.1:Roll the terminal into the paper tray,20KPIN/Tray
The outermost layer is protected by T=0.5 paper tape
Paper Tray Specification:CTN-ZP03(560*560mm) with CTN-16TE
Remarks: 1.The gap between the paper tape and tray is less than 1mm,to reduce the shaking of the terminal in the paper tray
2. The paper tape should be tightly wound with the termianl to prevent loosening;

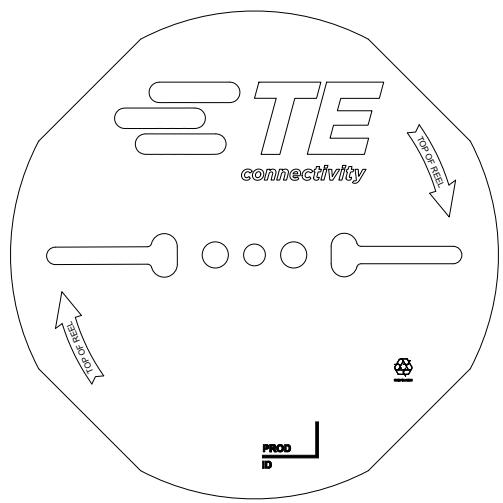


No.2:Label the paper tray



No.3:The stack of all trays in each box is fixed with PE film(7 trays/carton)

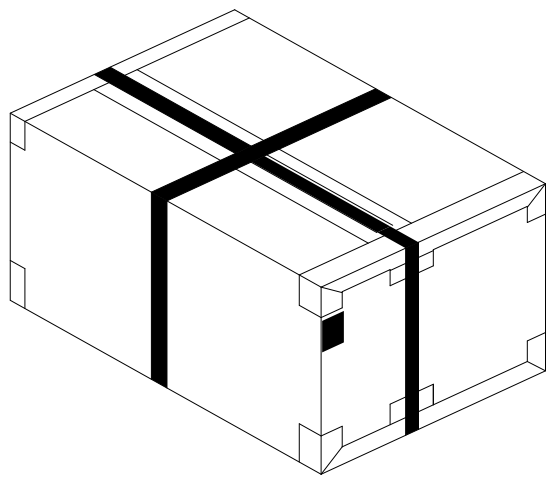


No.6:Packing belt

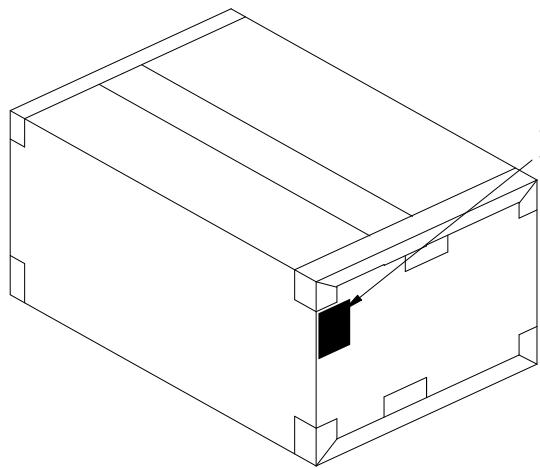

No.5: Seal the carton and label the outer one

label the outer one

carton

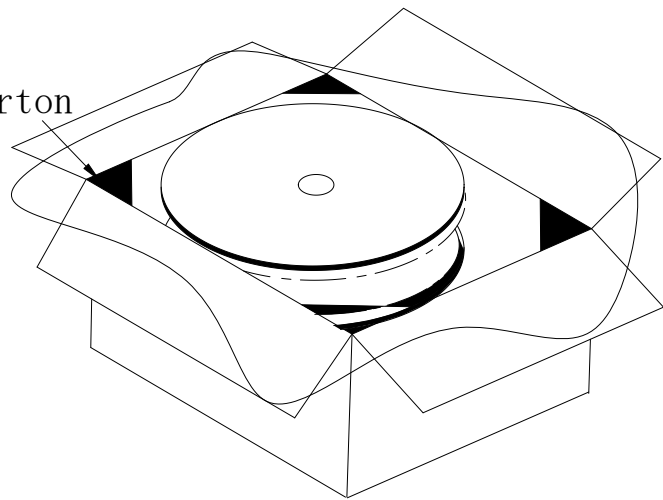

No.4:Inside the carton need to set waterproof bag PE-44, and then put the terminal into the carton
put two packets of desiccant and then sealed,
place paper corner guards at the four corners of the carton
Paper Tray Specification:CTN-16TE(56.5*56.5*22.5cm) with CTN-J035

Remarks:
1. Put the product into the terminal paper tray as shown in the figure
2. Pay attention to the consistency of label style, position and direction;

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN Tommy Qian 12APR2021	TE Connectivity Ltd.		
		CHK Niki Shi 12APR2021			
		APVD Niki Shi 12APR2021	NAME		
		PRODUCT SPEC	1.25mm PITCH WTB Conn. CABLE CONTACT		
		APPLICATION SPEC	-		
		WEIGHT	SIZE A2	CAGE CODE 00779	DRAWING NO C=2390147
		CUSTOMER DRAWING	SCALE N/A	SHEET 2 of 2	REV B