

Technical specification:


Rated voltage: IEC 61076-2-101	30 V
Current rating: IEC 61076-2-101	2 A at 40°C
Insulation resistance: IEC 60512	>=100 MΩ
Pollution degree: IEC 60664-1	3/2
Degree of protection: IEC 60529	IP 67, in mated condition
Temperature range: EN 60512-11-10 EN 60512-11-4 UL 2238	-30°C ... +130°C -40°C -40°C ... +130°C -30°C ... +130°C
Mating cycles: IEC 60512-9a	>=100


Materials:


Contact:	CuZn, Ni b / Au 0,2 gal.
Contact carrier:	PA GF, UL 94 V-0 like RAL9005
Sealing:	FPM

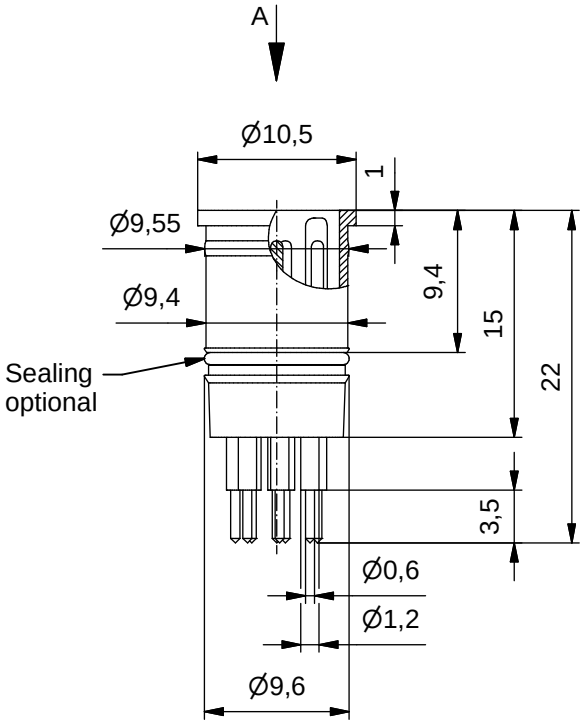

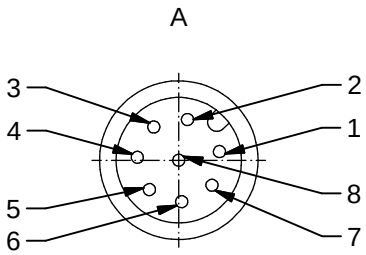

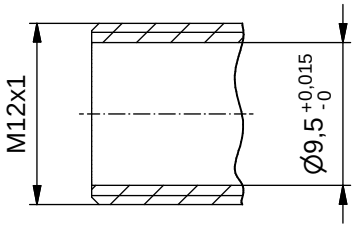

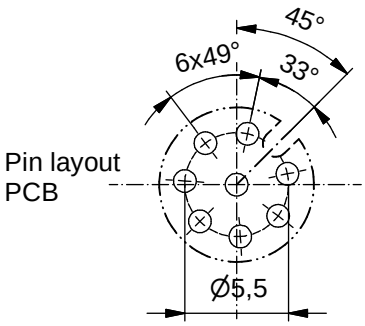



Part no:	Description:	Pos	Construction:
43-01635	SAL - 12 - ES8 - P	8	without sealing
43-01701	SAL - 12 - ESO8 - P	8	with sealing

DO NOT ALTER CAD DRAWING BY HAND
Directive 2011/65/EU RoHS compliant

Index: d 11.06.15 fro Ä5678
UL adaptation

dim. in mm

	date	name
drawn	15.09.10	Franz
appd.	15.09.10	Mankopf

general tolerance: 0 ± 0,50mm; 0,0 ± 0,25mm; 0,00 ± 0,10mm

THIS DRAWING MAY NOT BE COPIED OR REPRODUCED IN ANY WAY, AND MAY NOT BE PASSED ON TO A THIRD PARTY WITHOUT WRITTEN PERMISSION. OWNERSHIP AND COPYRIGHT OF CONEC GmbH

title:
Panel plug M12x1
with dip solder

dwg no:
43K1A1175

part no: