

ASMT-Jx3x

3W Mini Power LED Light Source



Description

The Broadcom® 3W Mini Power LED Light Source is a high-performance energy-efficient device that can handle high thermal and high driving current. An option with electrically isolated metal slug is also available.

The low-profile package design and ultra-small footprint are suitable for a wide variety of applications especially where space and height is a constraint.

The package is compatible with the reflow soldering process. To facilitate easy pick-and-place assembly, the LEDs are packed in EIA-compliant tape and reel.

CAUTION! Keep the LEDs in a moisture barrier bag when not in use because prolonged exposure to the environment might cause the silver-plated leads to tarnish, which might cause difficulties in soldering.

Features


- Available in Red, Amber, Green, Blue, and Royal Blue
- Small footprint and low profile
- Symmetrical outline
- Energy efficient
- Direct heat transfer from metal slug to motherboard
- Compatible with reflow soldering process
- High current operation
- Long operation life
- Wide viewing angle
- Silicone encapsulation
- Non-ESD sensitive (threshold > 16 kV)
- MSL 1 products

Applications

- Sign backlight
- Safety, exit and emergency sign lightings
- Specialty lighting such as task lighting and reading lights
- Retail display
- Commercial lighting
- Accent or marker lightings, strip or step lightings
- Portable lightings, bicycle head lamp, torch lights.
- Decorative lighting
- Architectural lighting
- Pathway lighting
- Street lighting
- Pedestrian street lighting
- Tunnel lighting
- Horticulture

Package Dimensions

Figure 1: ASMT-Jx3x Package Outline Drawing

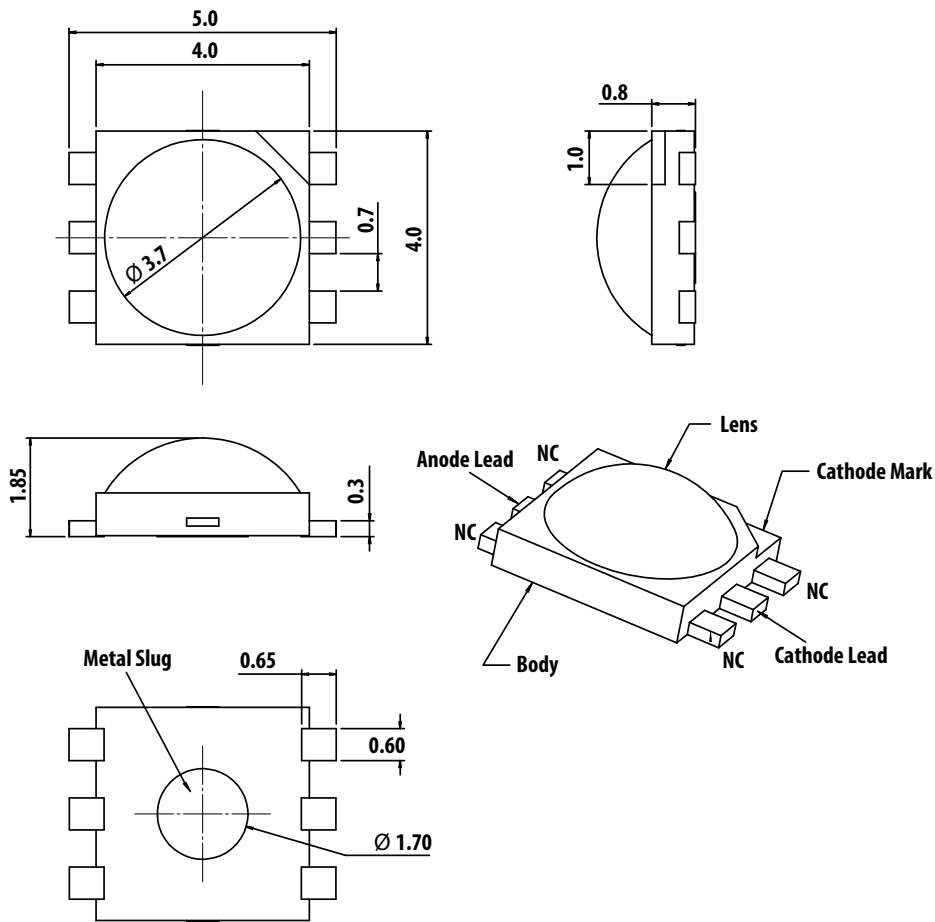

NOTE:

1. All dimensions are in millimeters.
2. The metal slug is connected to the anode for electrically nonisolated option.
3. Tolerance is ± 0.1 mm, unless otherwise specified.
4. Terminal finish: Ag plating.
5. Corresponding NC (No Connection) leads adjacent to anode and cathode leads can be electrically short.

Device Selection Guide ($T_J = 25^\circ\text{C}$)

Part Number	Color	Luminous Flux (lm) / Radiometric Power (mW), $\Phi_V^{\text{a, b}}$			Test Current (mA)	Dice Technology	Electrically Isolated Metal Slug
		Min.	Typ.	Max.			
ASMT-JR30-AST01	Red	51.7	58.0	87.4	350	AlInGaP	No
ASMT-JA30-ARS01	Amber	39.8	48.0	67.2	350	AlInGaP	No
ASMT-JG31-NUW01	Green	87.4	110.0	129.5	350	InGaN	Yes
ASMT-JB31-NNP01	Blue	18.1	25.0	30.6	350	InGaN	Yes
ASMT-JL31-NRS01	Royal Blue	515 mW	600 mW	685.0 mW	350	InGaN	Yes

a. Φ_V is the total luminous flux/radiometric power output as measured with an integrating sphere at 25-ms mono pulse condition.

b. Flux tolerance is $\pm 10\%$.

Absolute Maximum Ratings

Parameter	AlInGaP	InGaN	Units
DC Forward Current ^a	700	700	mA
Peak Pulsing Current	1500	2400	mA
Power Dissipation	1820	2730	mW
LED Junction Temperature	125	135	$^\circ\text{C}$
Operating Metal Slug Temperature Range at 350 mA	-40 to +115	-40 to +120	$^\circ\text{C}$
Operating Metal Slug Temperature Range at 700 mA	-40 to +100	-40 to +105	$^\circ\text{C}$
Storage Temperature Range	-40 to +120	-40 to +120	$^\circ\text{C}$
Reverse Voltage ^b	Not recommended		

a. Derate linearly based on [Figure 10](#) for AlInGaP and [Figure 21](#) for InGaN.

b. Not designed for reverse-bias operation.

Optical Characteristics at 350 mA ($T_J = 25^\circ\text{C}$)

Part Number	Color	Peak Wavelength, λ_{PEAK} (nm)	Dominant Wavelength, λ_D^{a} (nm)	Viewing Angle, $2\theta_{1/2}^{\text{b}}$ ($^\circ$)	Luminous Efficiency (lm/W)
		Typ.	Typ.	Typ.	Typ.
ASMT-JR30-AST01	Red	635	625	165	79
ASMT-JA30-ARS01	Amber	598	590	165	65
ASMT-JG31-NUW01	Green	519	525	165	98
ASMT-JB31-NNP01	Blue	454	460	165	22
ASMT-JL31-NRS01	Royal Blue	450	455	165	Not applicable

a. The dominant wavelength, λ_D , is derived from the CIE Chromaticity Diagram and represents the color of the device

b. $\theta_{1/2}$ is the off-axis angle where the luminous intensity is half of the peak intensity.

Electrical Characteristic at 350 mA ($T_J = 25^\circ\text{C}$)

Dice Type	Forward Voltage, V_F (V)			Thermal Resistance, $R_{\theta_{j-ms}}$ ($^\circ\text{C/W}$) ^a
	Min.	Typ.	Max.	Typ.
AlInGaP	1.7	2.1	2.3	9
InGaN	2.8	3.2	3.5	9

a. $R_{\theta_{j-ms}}$ is Thermal Resistance from LED junction to metal slug.

Optical and Electrical Characteristic at 700 mA ($T_J = 25^\circ\text{C}$)

Part Number	Color	Luminous Flux (lm)/ Radiometric Power (mW), Φ_V	Forward Voltage, V_F (V)
		Typ.	Typ.
ASMT-JR30-AST01	Red	104.0	2.4
ASMT-JA30-ARS01	Amber	86.0	2.4
ASMT-JG31-NUW01	Green	176.0	3.3
ASMT-JB31-NNP01	Blue	43.0	3.6
ASMT-JL31-NRS01	Royal Blue	1020 mW	3.6

Part Numbering System

A S M T - J x_1 3 x_2 - x_3 x_4 x_5 x_6 x_7

Code	Description	Option	
x_1	LED Chip Color	A	Amber
		B	Blue
		G	Green
		L	Royal Blue
		R	Red
x_2	Heat Sink	0	Electrically Non-Isolated
		1	Electrically Isolated
x_3	Dice Type	A	AlInGaP
		N	InGaN
x_4	Minimum Flux Bin Selection	Refer Flux Bin Limit Table	
x_5	Maximum Flux Bin Selection		
x_6	Color Bin Selection	Refer Color Bin Selection	
x_7	Packaging Option	0	Tube
		1	Tape and Reel

NOTE: For selection details, see [Option Selection Details](#).

Option Selection Details

ASMT-J x_1 3 x_2 - x_3 x_4 x_5 x_6 x_7

x_4 - Minimum Flux Bin Selection

x_5 - Maximum Flux Bin Selection

x_6 - Color Bin Selection

x_7 - Packaging Option

Flux Bin Limit (x_4 , x_5)

Color	Bin ID	Luminous Flux (lm)/ Radiometric Power (mW) at 350 mA	
		Min.	Max.
Blue	M	13.9	18.1
	N	18.1	23.5
	P	23.5	30.6
	Q	30.6	39.8
Other Colors	R	39.8	51.7
	S	51.7	67.2
	T	67.2	87.4
	U	87.4	99.6
	V	99.6	113.6
Royal Blue	W	113.6	129.5
	L	175.0	225.0
	M	225.0	275.0
	N	275.0	355.0
	P	355.0	435.0
	Q	435.0	515.0
	R	515.0	595.0
	S	595.0	685.0

Tolerance for each bin limit is $\pm 10\%$.

Color Bin Selection (x_6)

Individual reel contains parts from one color bin selection only.

Selection	Bin ID
0	Full Distribution
Z	A and B
Y	B and C
W	C and D
V	D and E
Q	A, B, and C
P	B, C, and D
N	C, D, and E
M	D, E, and F

Color Bin Limits

Color	Bin ID	Dominant Wavelength (nm) at 350 mA	
		Min.	Max.
Red	—	620.0	635.0
Amber	B	587.0	589.5
	C	589.5	592.0
	D	592.0	594.5
	E	594.5	597.0
Blue	A	455.0	460.0
	B	460.0	465.0
	C	465.0	470.0
	D	470.0	475.0
Green	A	515.0	520.0
	B	520.0	525.0
	C	525.0	530.0
	D	530.0	535.0

Tolerance: ± 1 nm.

Color	Bin ID	Peak Wavelength (nm) at 350 mA	
		Min.	Max.
Royal Blue	C	440.0	445.0
	D	445.0	450.0
	E	450.0	455.0
	F	455.0	460.0

Tolerance: ± 2 nm.

Packaging Option (x₇)

Selection	Option
1	Tape and Reel

Example

ASMT-JG31-NUW01

ASMT-JG31-Nxxxx

x₄ = U

x₅ = W

x₆ = 0

x₇ = 1

- Green, InGaN, Electrically Isolated Heat Sink
- Minimum Flux Bin U
- Maximum Flux Bin W
- Full Distribution
- Tape and Reel Option

AlInGaP

Figure 2: Relative Intensity vs. Wavelength for Red and Amber

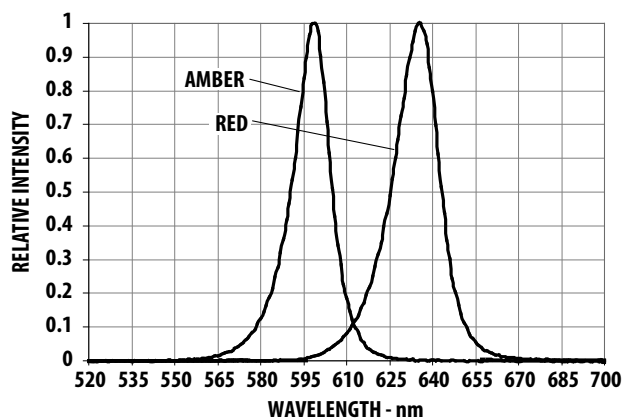


Figure 3: Relative Luminous Flux/Radiometric Power vs. Mono Pulse Current

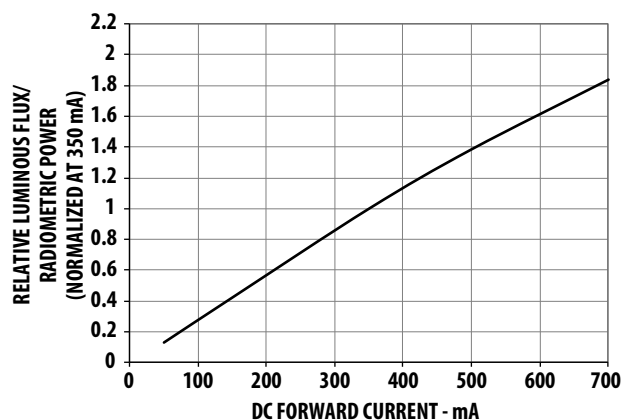


Figure 4: Forward Current vs. Forward Voltage

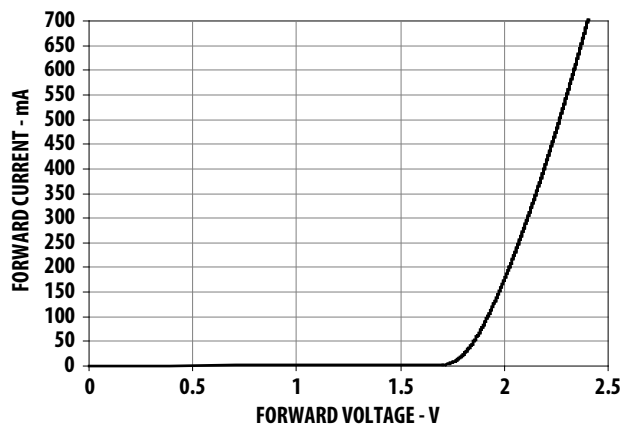


Figure 5: Radiation Pattern Red and Amber

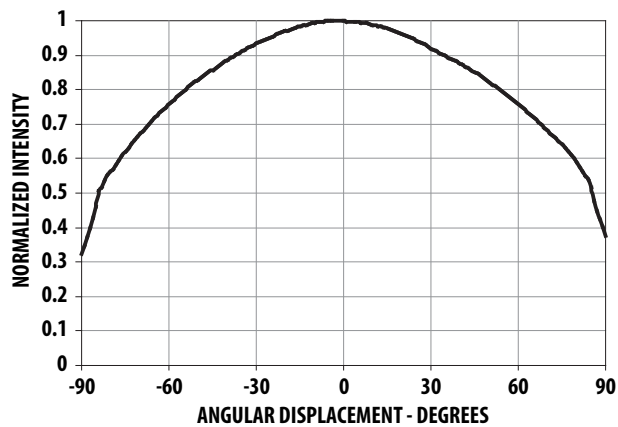


Figure 6: Maximum Pulse Current vs. Ambient Temperature. Derated based on $T_A = 25^\circ\text{C}$, $R_{\theta\text{JA}} = 30^\circ\text{C/W}$.

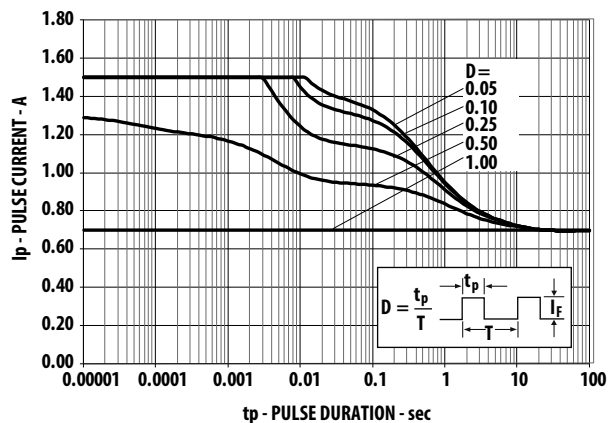


Figure 7: Maximum Pulse Current vs. Ambient Temperature. Derated based on $T_A = 85^\circ\text{C}$, $R_{\theta\text{JA}} = 30^\circ\text{C/W}$.

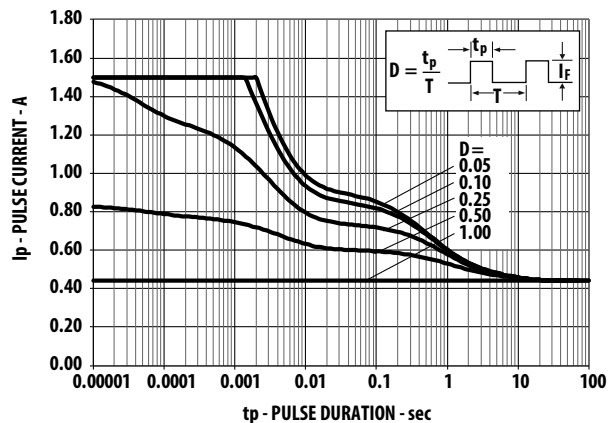


Figure 8: Relative Light Output vs. Junction Temperature

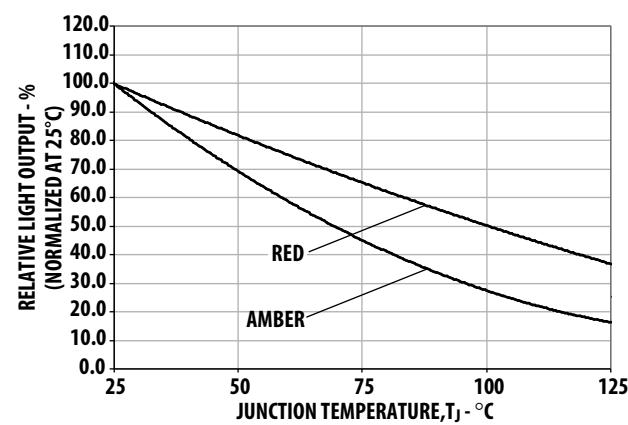


Figure 9: Forward Voltage Shift vs. Junction Temperature

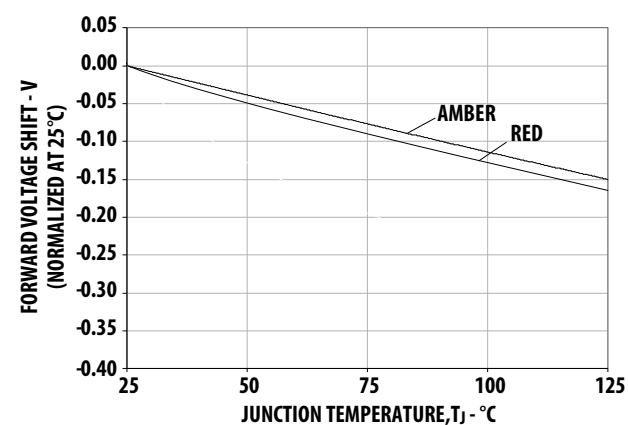


Figure 10: Maximum Forward Current vs. Ambient Temperature. Derated based on $T_{JMAX} = 125^{\circ}C$, $R\theta_{J-A} = 20^{\circ}C/W$, $25^{\circ}C/W$, and $30^{\circ}C/W$.


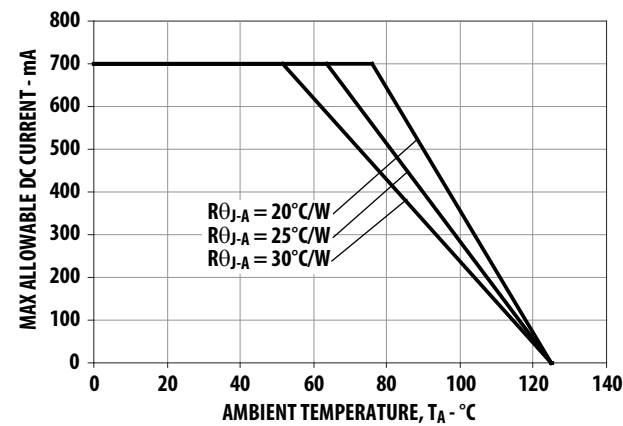


Figure 11: Maximum Forward Current vs. Ambient Temperature. Derated based on $T_{JMAX} = 125^{\circ}C$, $R\theta_{J-MS} = 9^{\circ}C/W$.

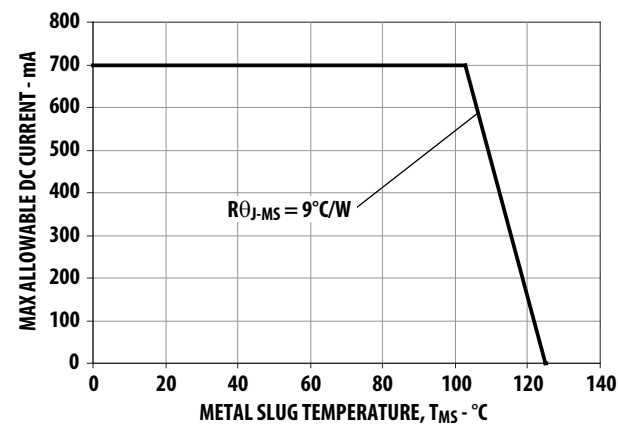

InGaN

Figure 12: Relative Intensity vs. Wavelength for Royal Blue, Blue, and Green

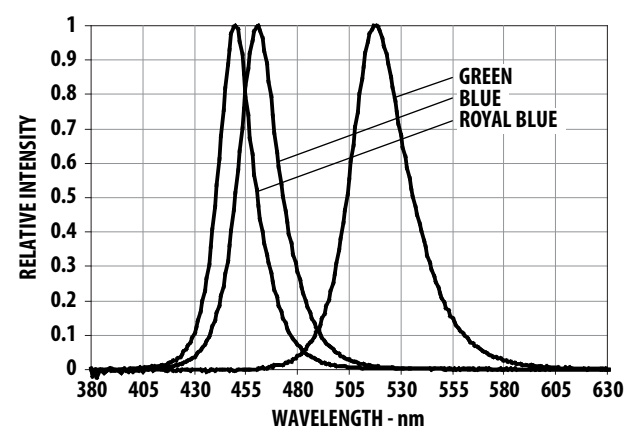


Figure 13: Relative Luminous Flux vs. Mono Pulse Current

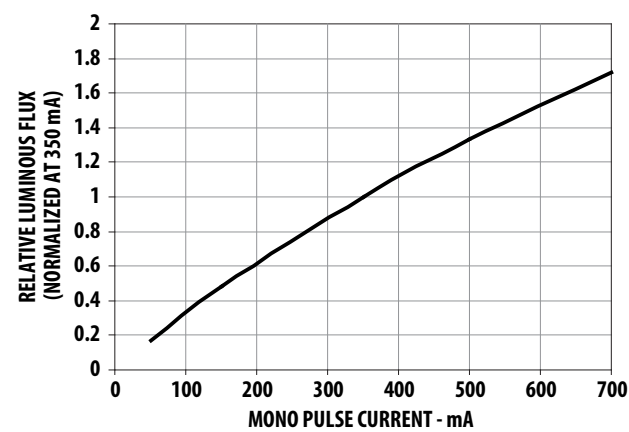


Figure 14: Forward Current vs. Forward Voltage for Royal Blue and Blue

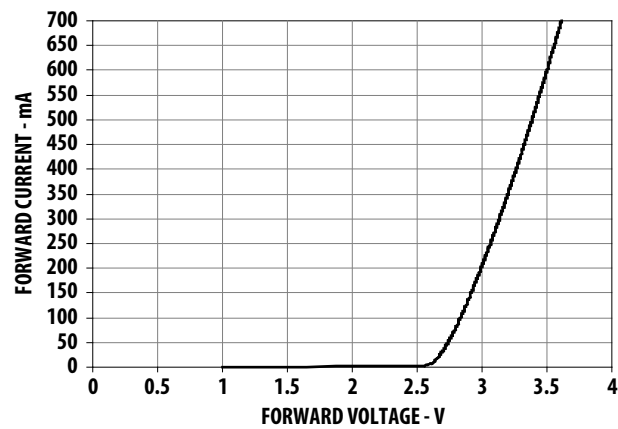


Figure 15: Forward Current vs. Forward Voltage for Green

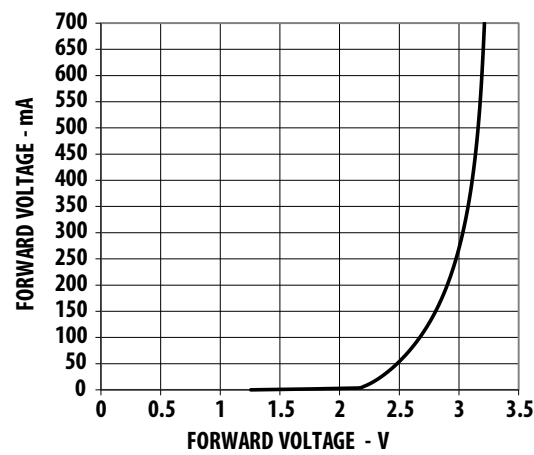


Figure 16: Radiation Pattern for Royal Blue, Blue, and Green

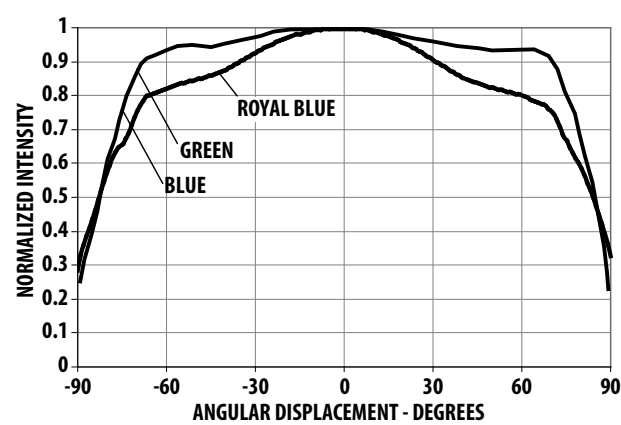


Figure 17: Maximum Pulse Current vs. Ambient Temperature. Derated based on $T_A = 25^\circ\text{C}$, $R_{\theta J-A} = 30^\circ\text{C/W}$

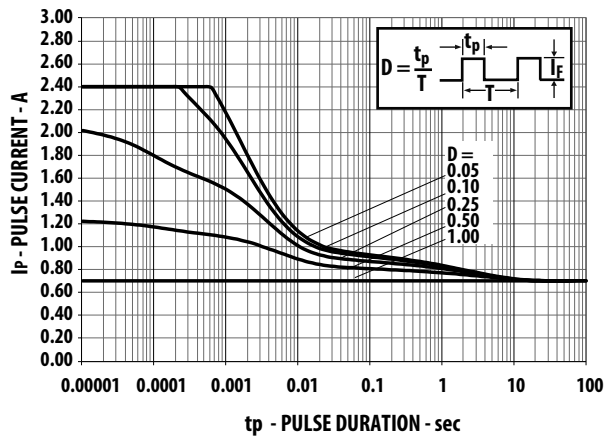


Figure 18: Maximum Pulse Current vs. Ambient Temperature. Derated based on $T_A = 85^\circ\text{C}$, $R_{\theta J-A} = 30^\circ\text{C/W}$

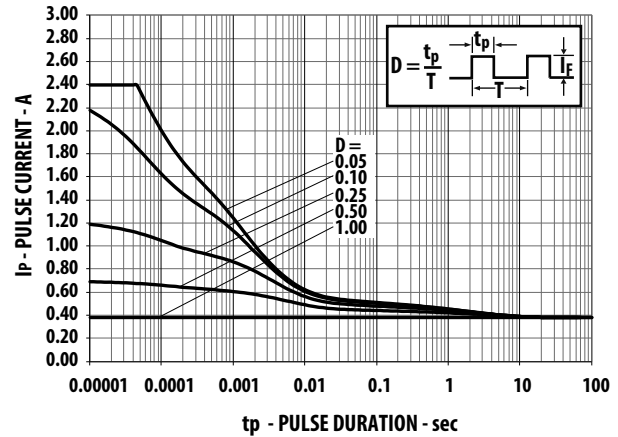


Figure 19: Relative Light Output vs. Junction Temperature

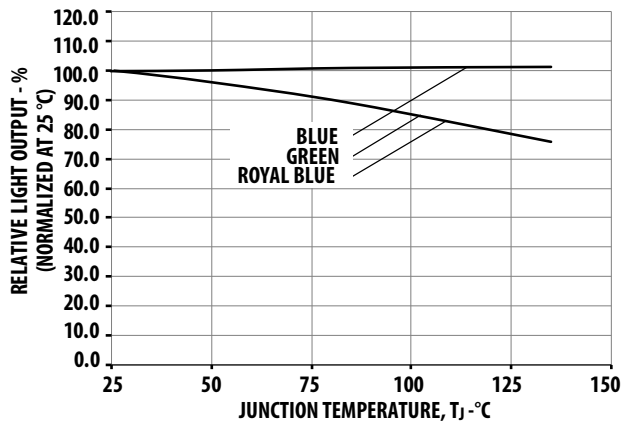


Figure 20: Forward Voltage Shift vs. Junction Temperature

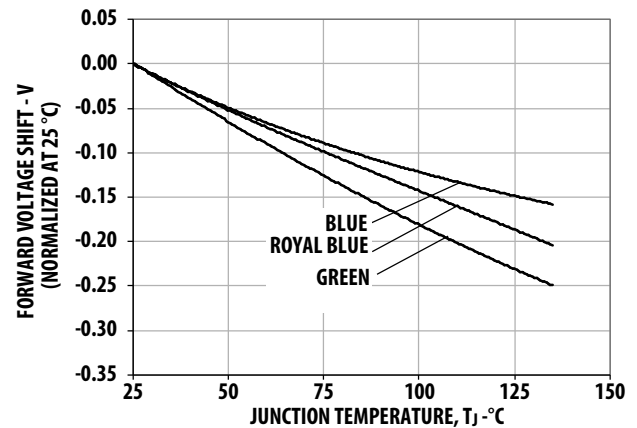


Figure 21: Maximum Forward Current vs. Ambient Temperature. Derated based on $T_{JMAX} = 135^\circ\text{C}$, $R_{\theta J-A} = 20^\circ\text{C/W}$, 25°C/W and 30°C/W

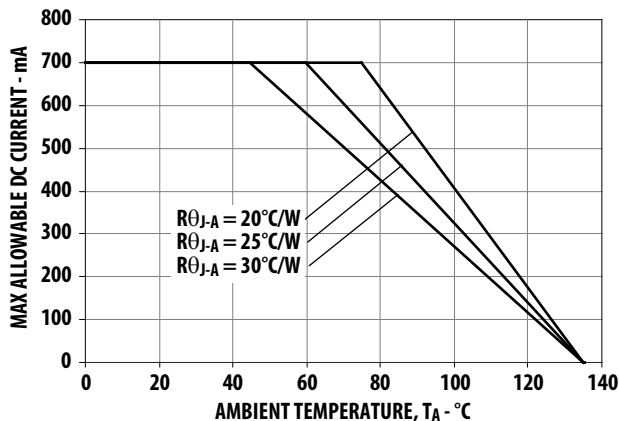


Figure 22: Maximum Forward Current vs. Metal Slug Temperature. Derated based on $T_{JMAX} = 135^\circ\text{C}$, $R_{\theta J-MS} = 9^\circ\text{C/W}$

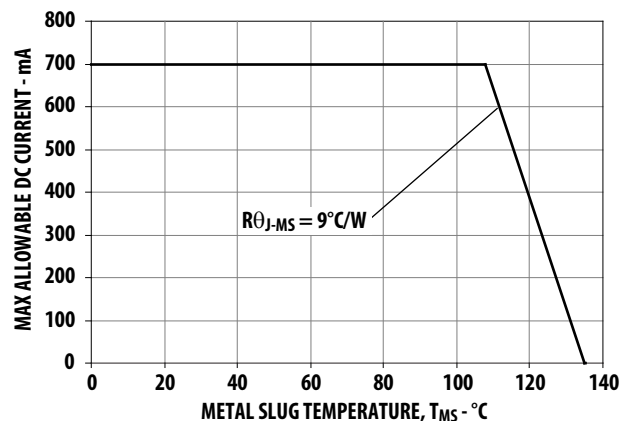


Figure 23: Recommended Soldering Land Pattern

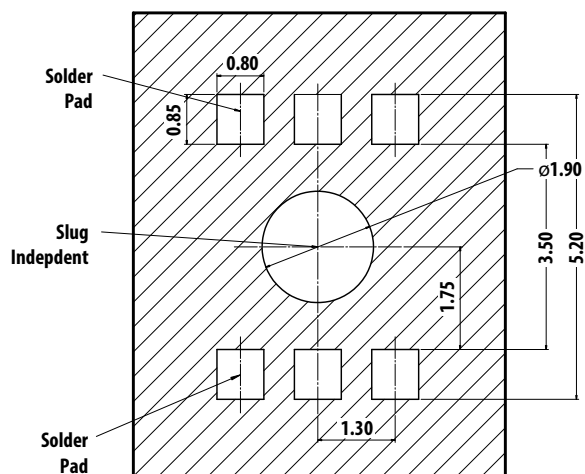


Figure 24: Recommended Pick-and-Pick Nozzle Tip. Inner diameter = 3.2 mm.


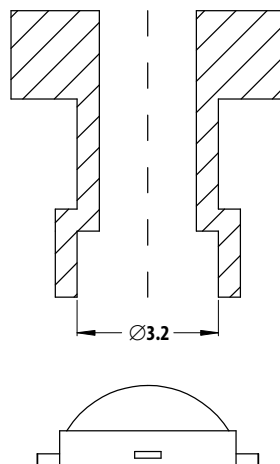



Figure 25: Recommended Reflow Soldering Profile

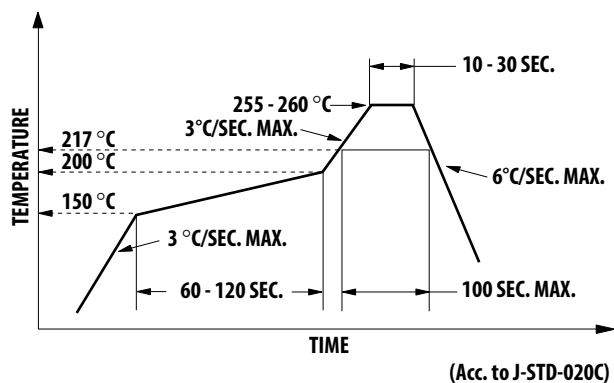

NOTE: For detailed information on reflow soldering of Broadcom surface mount LEDs, refer to Broadcom Application Note AN-1060, *Surface Mounting SMT LED Indicator Components*.

Tape and Reel – Option 1

Figure 26: Carrier Tape Dimensions

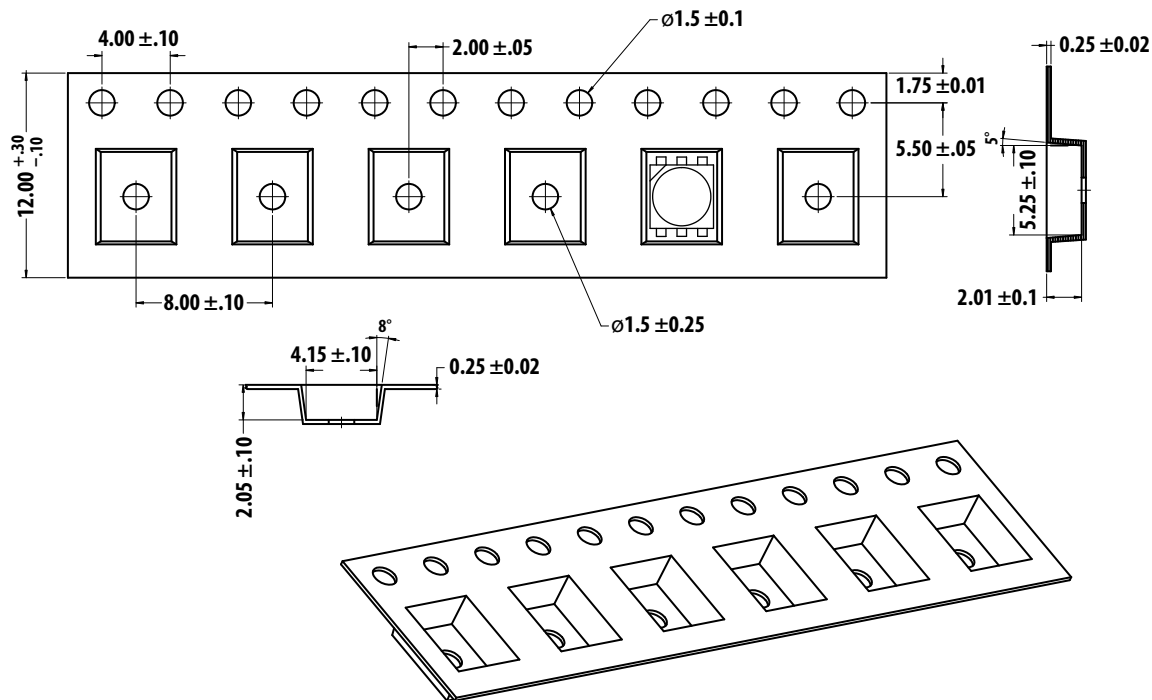

NOTE:

1. Empty component pockets are sealed with top cover tape.
2. 250 or 500 pieces per reel.
3. Drawing is not to scale.
4. All dimensions are in millimeters.

Figure 27: Reel Dimensions


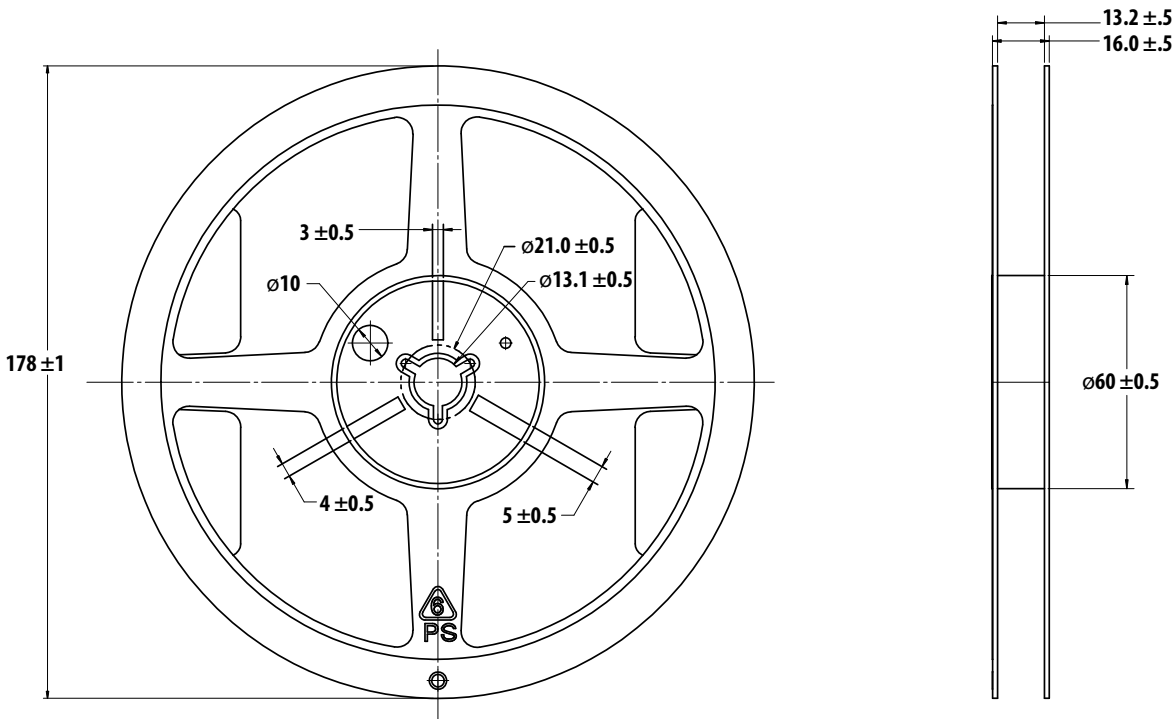


Figure 28: Reeling Orientation

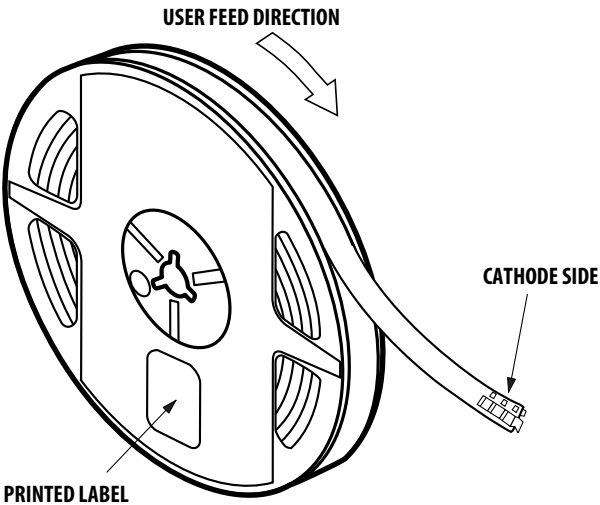

Disclaimer

Broadcom's products and software are not specifically designed, manufactured, or authorized for sale as parts, components, or assemblies for the planning, construction, maintenance, or direct operation of a nuclear facility or for use in medical devices or applications. Customers are solely responsible, and waive all rights to make claims against Broadcom or its suppliers, for all loss, damage, expense, or liability in connection with such use.

Copyright © 2014–2021 Broadcom. All Rights Reserved. The term “Broadcom” refers to Broadcom Inc. and/or its subsidiaries. For more information, go to www.broadcom.com. All trademarks, trade names, service marks, and logos referenced herein belong to their respective companies.

Broadcom reserves the right to make changes without further notice to any products or data herein to improve reliability, function, or design. Information furnished by Broadcom is believed to be accurate and reliable. However, Broadcom does not assume any liability arising out of the application or use of this information, nor the application or use of any product or circuit described herein, neither does it convey any license under its patent rights nor the rights of others.

