



NOTE:

1. CAVITY LOCATION DIMENSIONS INCREASE IN INCREMENTS OF 2.54 [0.1] TOLERANCES ARE NON-CUMULATIVE.
2. USE EXTRACTION TOOL 843996-3 TO REMOVE RECEPTACLE CONTACTS
3. THESE HOUSINGS ARE COMPATIBLE WITH ANY MOD II SHROUDED HEADER
4. HOUSINGS WILL ACCOMODATE ALL MOD IV, IV.5, AND MOD V CONTACTS.
5. OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI
6. PART NO., AND DATE CODE IS MARKED IN AREA AS SHOWN WHEN HOUSING SIZE PERMITS (SEE TABLE).
7. CAVITY IDENTS ON SECOND AND EVERY FIFTH CAVITY IS MARKED ON ONE SIDE AS SHOWN.
8. STRAIN RELIEF LOCATORS WILL APPEAR ON 20 POSITION AND LARGER HOUSINGS.
9. MATERIAL:GLASS FILLED THERMOPLASTIC, UL 94-V0 RATED, COLOR: BLACK.
10. NO PART NUMBER AND DATE CODE MARKING MAY BE ROTATED 90 deg

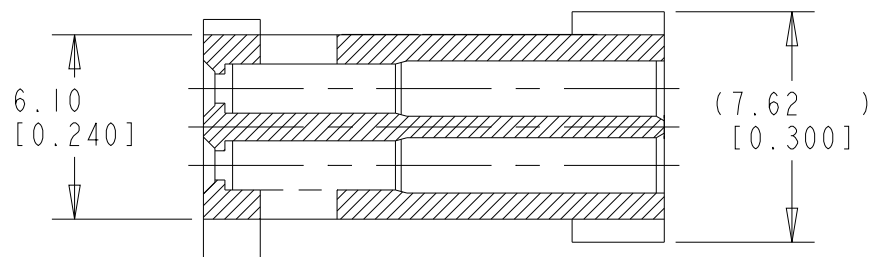


LONGEST POSITION SHOWN

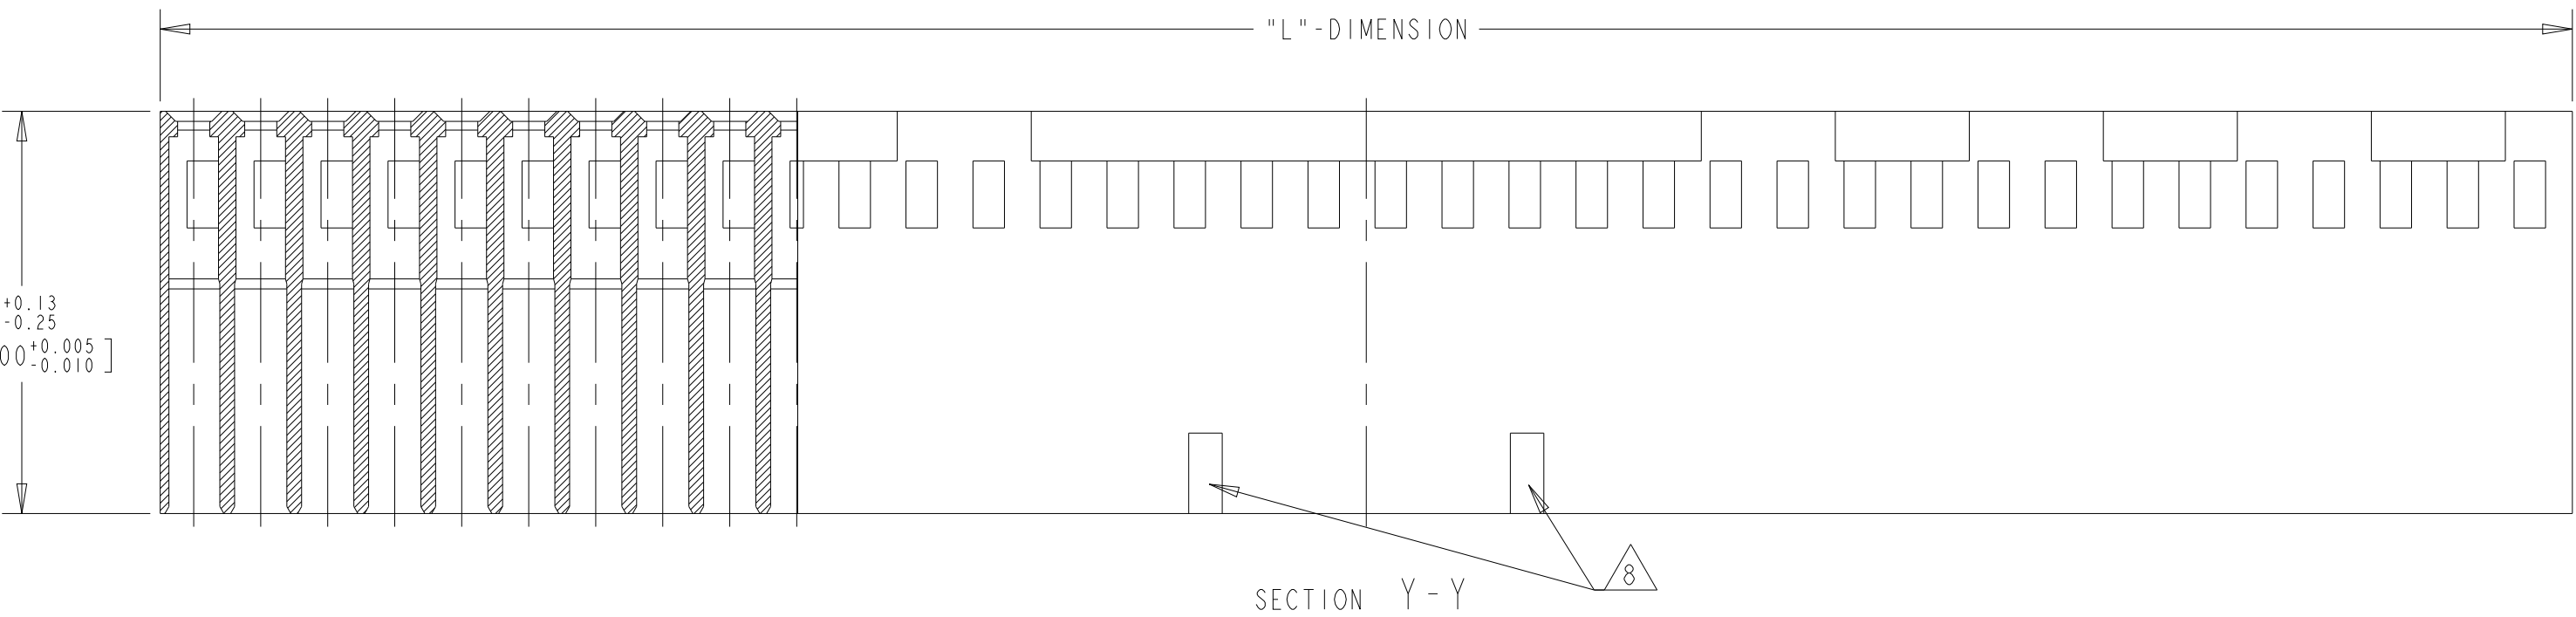


SECTION Y - Y


ISOMETRIC VIEW

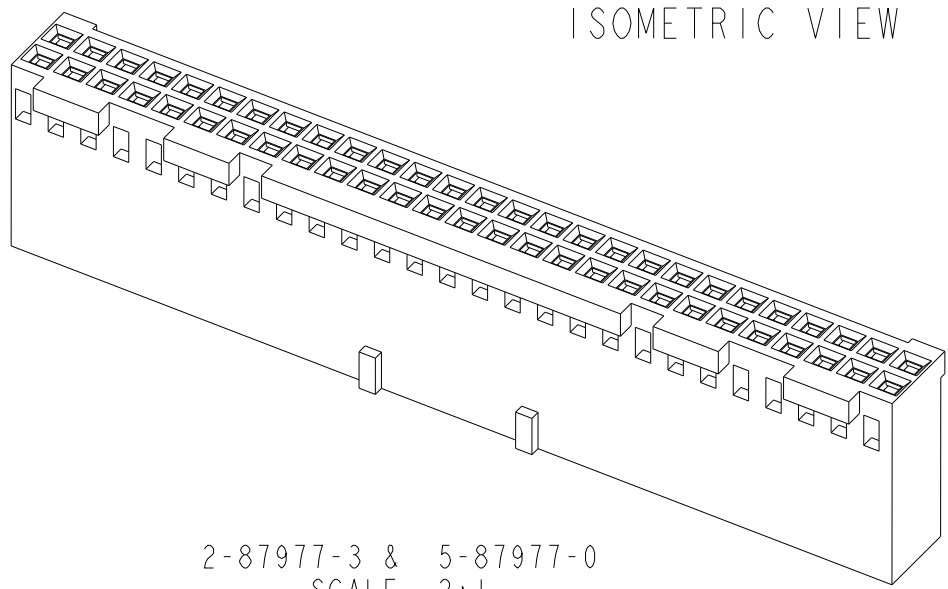

2-87977-3 & 5-87977-0
SCALE 2:1



87977-4 & 3-87977-1
SCALE 2:1

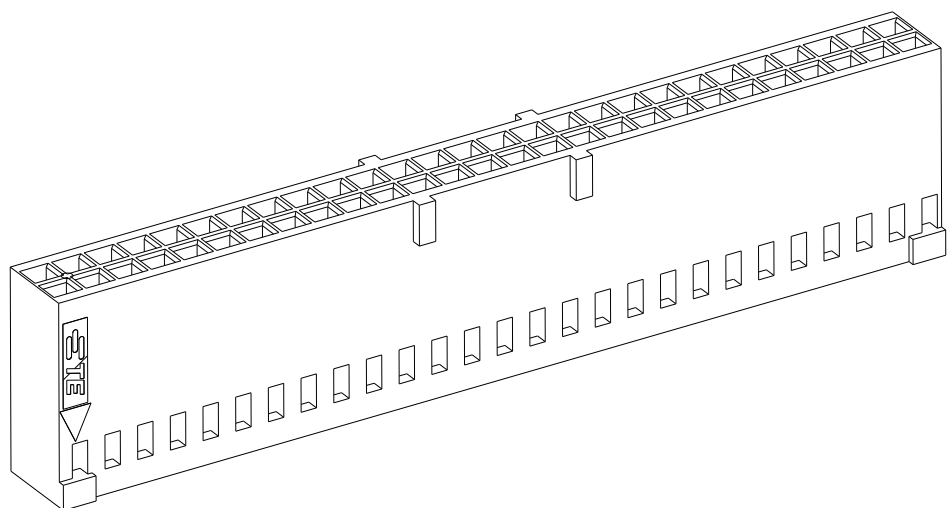[illegible]