


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION 2020
© COPYRIGHT 2020 BY TE CONNECTIVITY ALL RIGHTS RESERVED.


REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	F	REVISED PER ECO-15-007761	28MAY2015	RL	DM
	G	REVISED PER PCN E-20-008101	12JUN2020	DM	DM
	G1	REVISED PER PCN-22-157823	12OCT2022	SP	DM
	G2	REVISED PER PCN-25-234736	06FEB2025	GB	DM

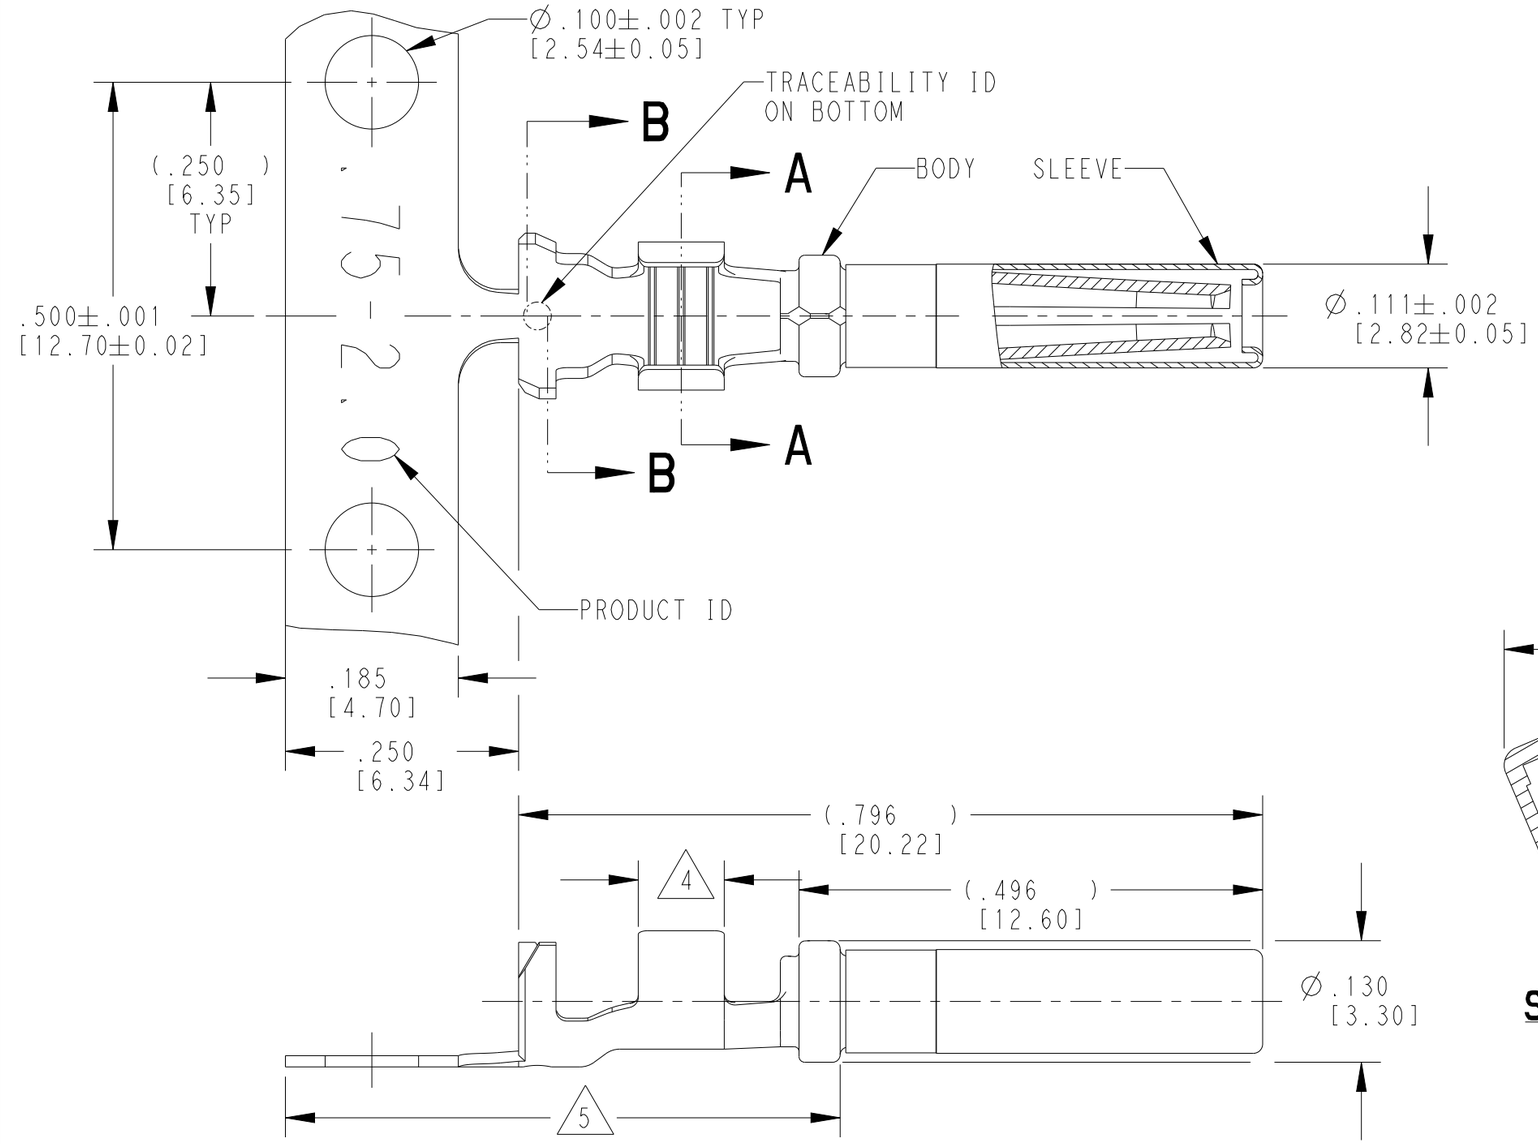

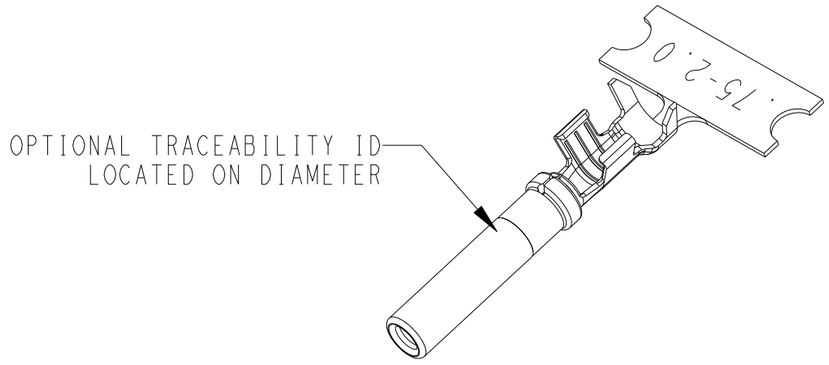

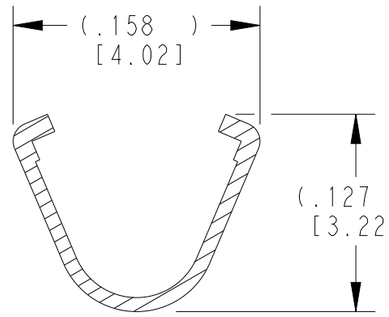

SECTION A-A
WIRE BARREL

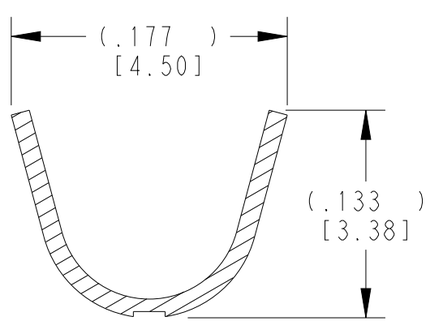

SECTION B-B
INSULATION BARREL

5 TIN PLATING MAY BE IN THIS REGION.

4 TIN PLATED REGION.

3 MATERIAL:
BODY: .012 [0.30] THICK COPPER ALLOY
SLEEVE: STAINLESS STEEL

2. WIRE RANGE: 18 AWG TO 14 AWG [0.75-2.0 mm²]
INSULATION RANGE: Ø.075-.140 [Ø1.91-3.56]

1 DELETED.

NOTES: UNLESS OTHERWISE SPECIFIED

TE INTERNAL PN	DEUTSCH PN	REV	PLATING
1062-16-0722	1062-16-0722	E	Ni/Cu overall, Sn/Ni/Cu Wire Barrel
1062-16-0744	1062-16-0744	E	Selective Au, Ni/Cu overall, Sn/Ni/Cu Wire Barrel
1062-16-0777	1062-16-0777	E	Sn/Ni/Cu overall

SUPERSEDED BY 1062-16-0144
SUPERSEDED BY 1062-16-0177

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: INCHES[mm]

TOLERANCES UNLESS OTHERWISE SPECIFIED:
0 PLC ±
1 PLC ±
2 PLC ±
3 PLC ±.025 [0.64]
4 PLC ±
ANGLES ±

MATERIAL 3

FINISH SEE TABLE

DWN STEVE PALLUTH 01DEC2000
CHK ALEX ROLINSKI 05DEC2000
APVD R.REED 08DEC2000
PRODUCT SPEC 108-151000
APPLICATION SPEC 114-151000
WEIGHT 0.43 g

TE Connectivity

NAME SOCKET, STAMPED CONTACT
SIZE 16
14-18 AWG, .075-.140 INS

SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A3	4AFU8	C-1062-16-07XX	-

Customer Drawing | SCALE 6:1 | SHEET 1 OF 1 | REV G2

1470-19 (3/13)