
© 2023 TE Connectivity. All Rights Reserved.


REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	E1	OBSOLETING PN 1-1546296-6 AND 1-1546296-8	29SEP2023	SP	PS

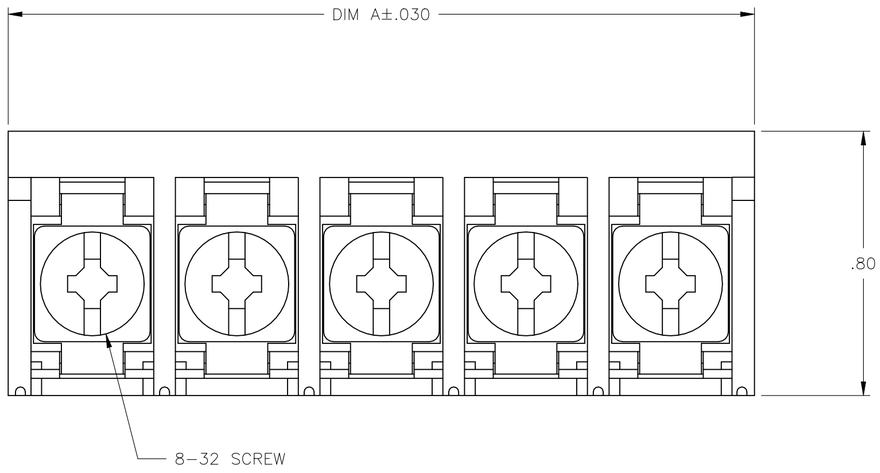


MATERIALS:
HOUSING: THERMOPLASTIC, UL94V-0, BLACK.
TERMINAL: BRIGHT TIN OVER COPPER ALLOY.
SCREWS: 8-32, ZINC PLATED STEEL.

ELECTRICAL:
CURRENT RATING: 30A
VOLTAGE RATING: 600V
WIRE RANGE: 10-18 AWG (UL)
10-22 AWG (CSA)

MECHANICAL:
RECOMMENDED TORQUE: 20 IN-LB.
OPERATING TEMP.: -40°C TO +120°C MAX.

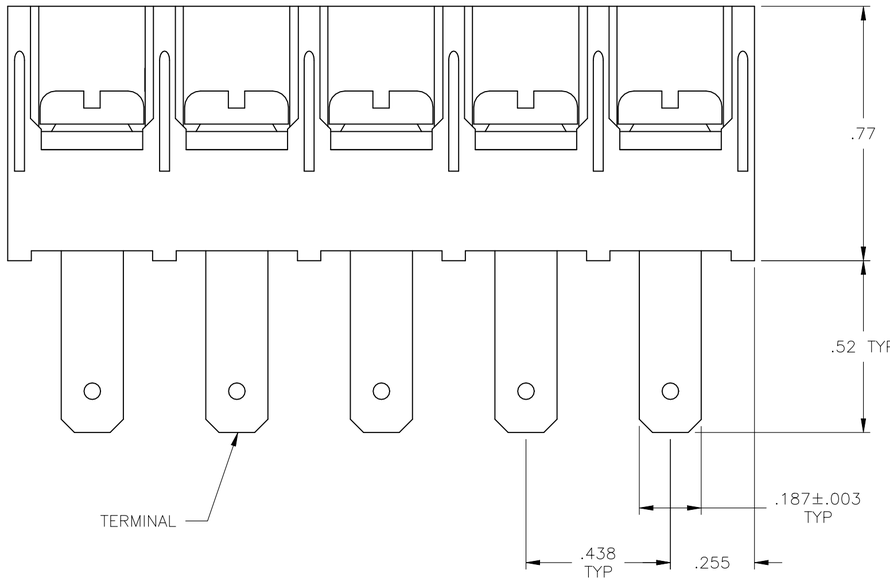

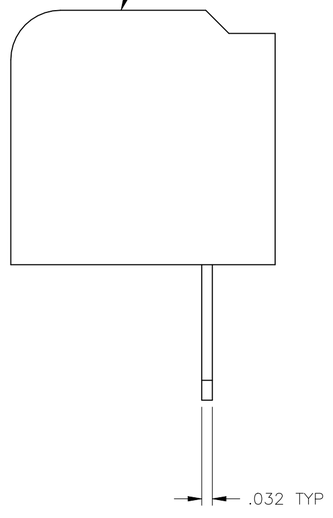

CATALOG NUMBER	DIM A	NO OF POSN	PART NUMBER
OBSOLETE	8QCV-26-008	10.937	26	2-1546296-6
OBSOLETE	8QCV-25-008	10.500	25	2-1546296-5
OBSOLETE	8QCV-24-008	10.062	24	2-1546296-4
OBSOLETE	8QCV-23-008	9.625	23	2-1546296-3
OBSOLETE	8QCV-22-008	9.187	22	2-1546296-2
OBSOLETE	8QCV-21-008	8.750	21	2-1546296-1
	8QCV-20-008	8.823	20	2-1546296-0
	8QCV-19-008	8.385	19	1-1546296-9
OBSOLETE	8QCV-18-008	7.948	18	1-1546296-8
	8QCV-17-008	7.510	17	1-1546296-7
OBSOLETE	8QCV-16-008	7.073	16	1-1546296-6
	8QCV-15-008	6.635	15	1-1546296-5
	8QCV-14-008	6.198	14	1-1546296-4
	8QCV-13-008	5.760	13	1-1546296-3
	8QCV-12-008	5.323	12	1-1546296-2
	8QCV-11-008	4.885	11	1-1546296-1
	8QCV-10-008	4.448	10	1-1546296-0
	8QCV-09-008	4.010	9	1546296-9
	8QCV-08-008	3.573	8	1546296-8
	8QCV-07-008	3.135	7	1546296-7
	8QCV-06-008	2.698	6	1546296-6
	8QCV-05-008	2.260	5	1546296-5
	8QCV-04-008	1.823	4	1546296-4
	8QCV-03-008	1.385	3	1546296-3
	8QCV-02-008	.948	2	1-1437659-2

1-1437659-2

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: INCHES

TOLERANCES UNLESS OTHERWISE SPECIFIED:
0 PLC ± -
1 PLC ± -
2 PLC ± .02
3 PLC ± .010
4 PLC ± -
ANGLES ± -

MATERIAL -
FINISH -

DWN S SCHLEGEL 19SEP2005
CHK S YODER 9/19/05
APVD S YODER 9/19/05
PRODUCT SPEC —
APPLICATION SPEC —
WEIGHT 0.000000

TE Connectivity

NAME ASSEMBLY, DUAL BARRIER 8QCV-XX-008

SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A2	00779	C-1-1437659-2	—

CUSTOMER DRAWING | SCALE 1:1 | SHEET 1 OF 1 | REV E1