





REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	-	SEE SHEET 1	-	-	-

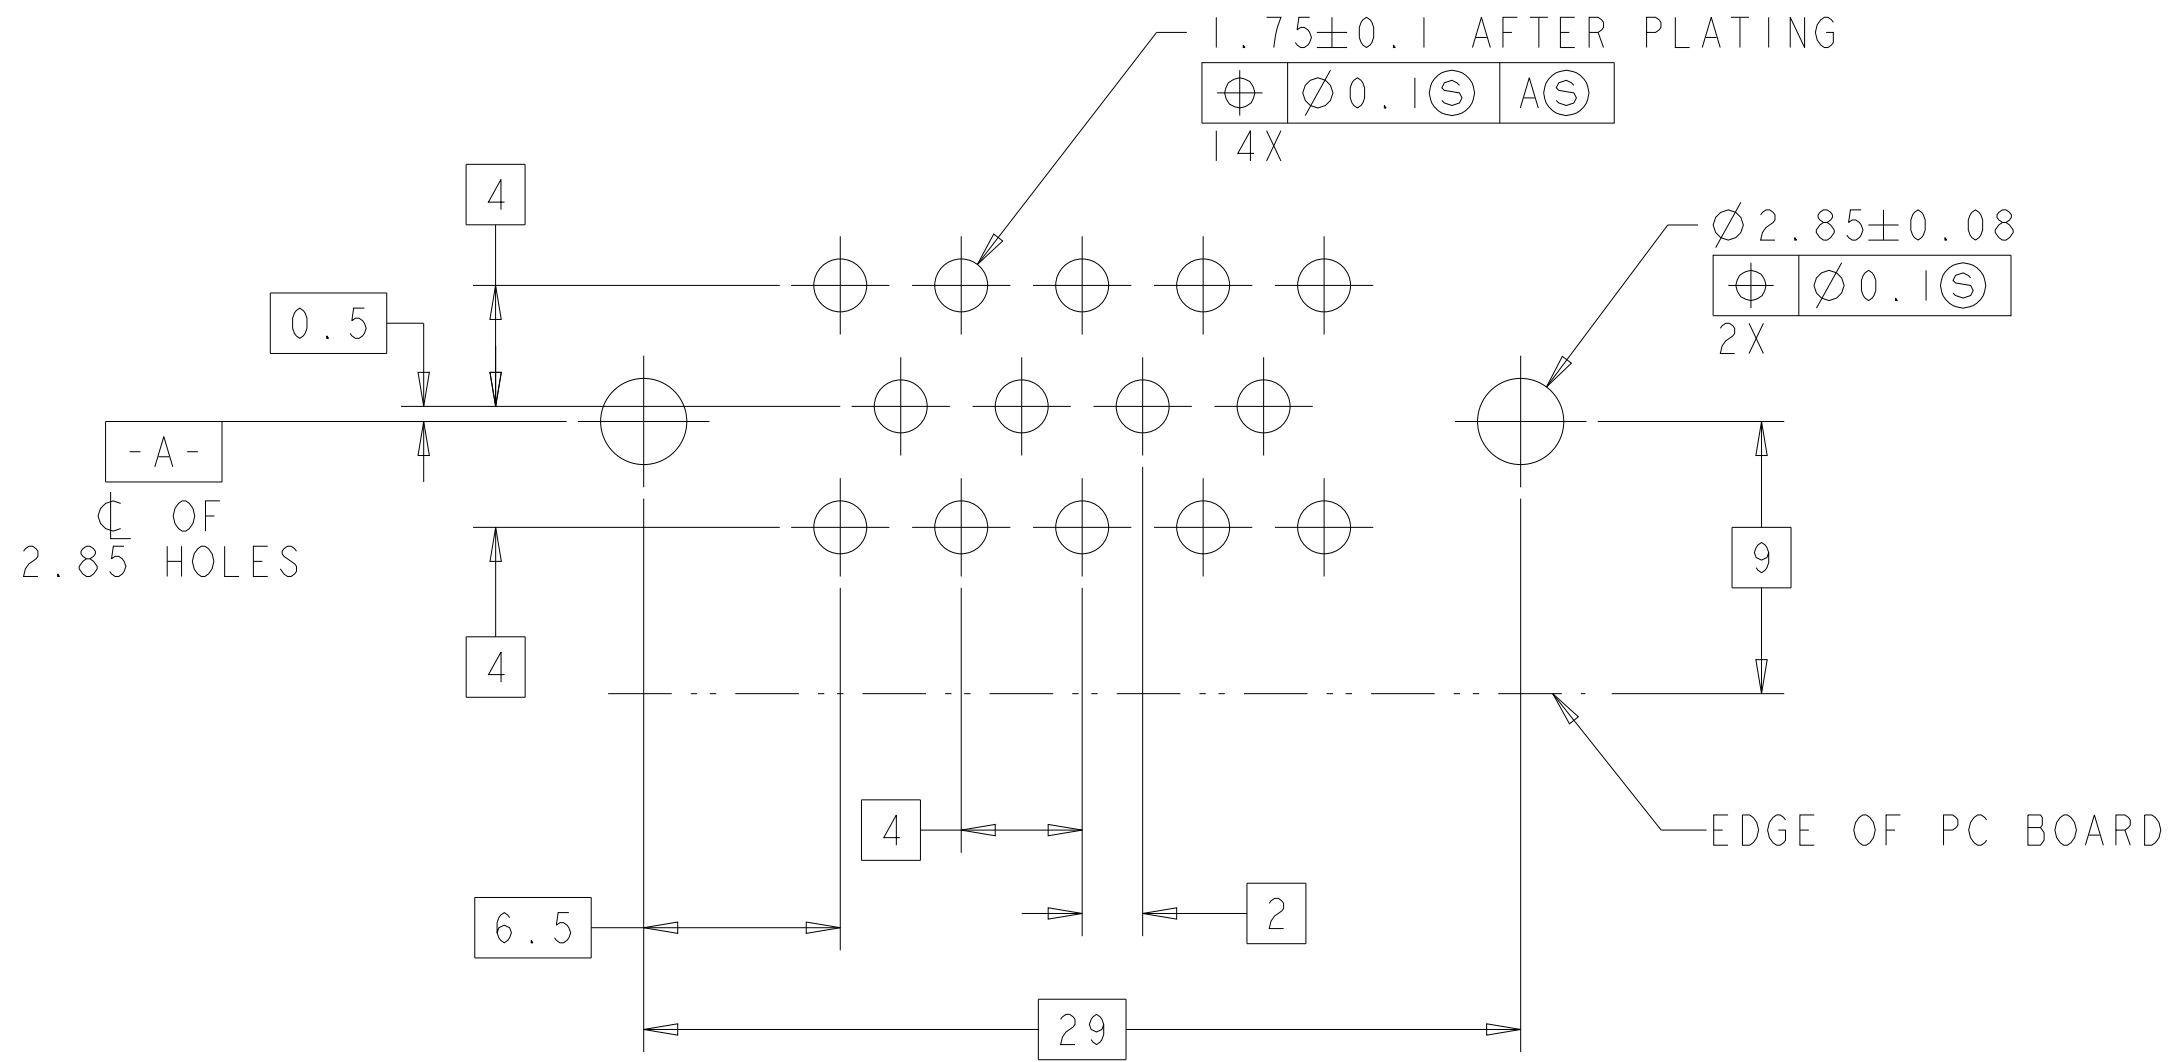


RECOMMENDED PC BOARD LAYOUT
FOR 1.57 PC BOARD

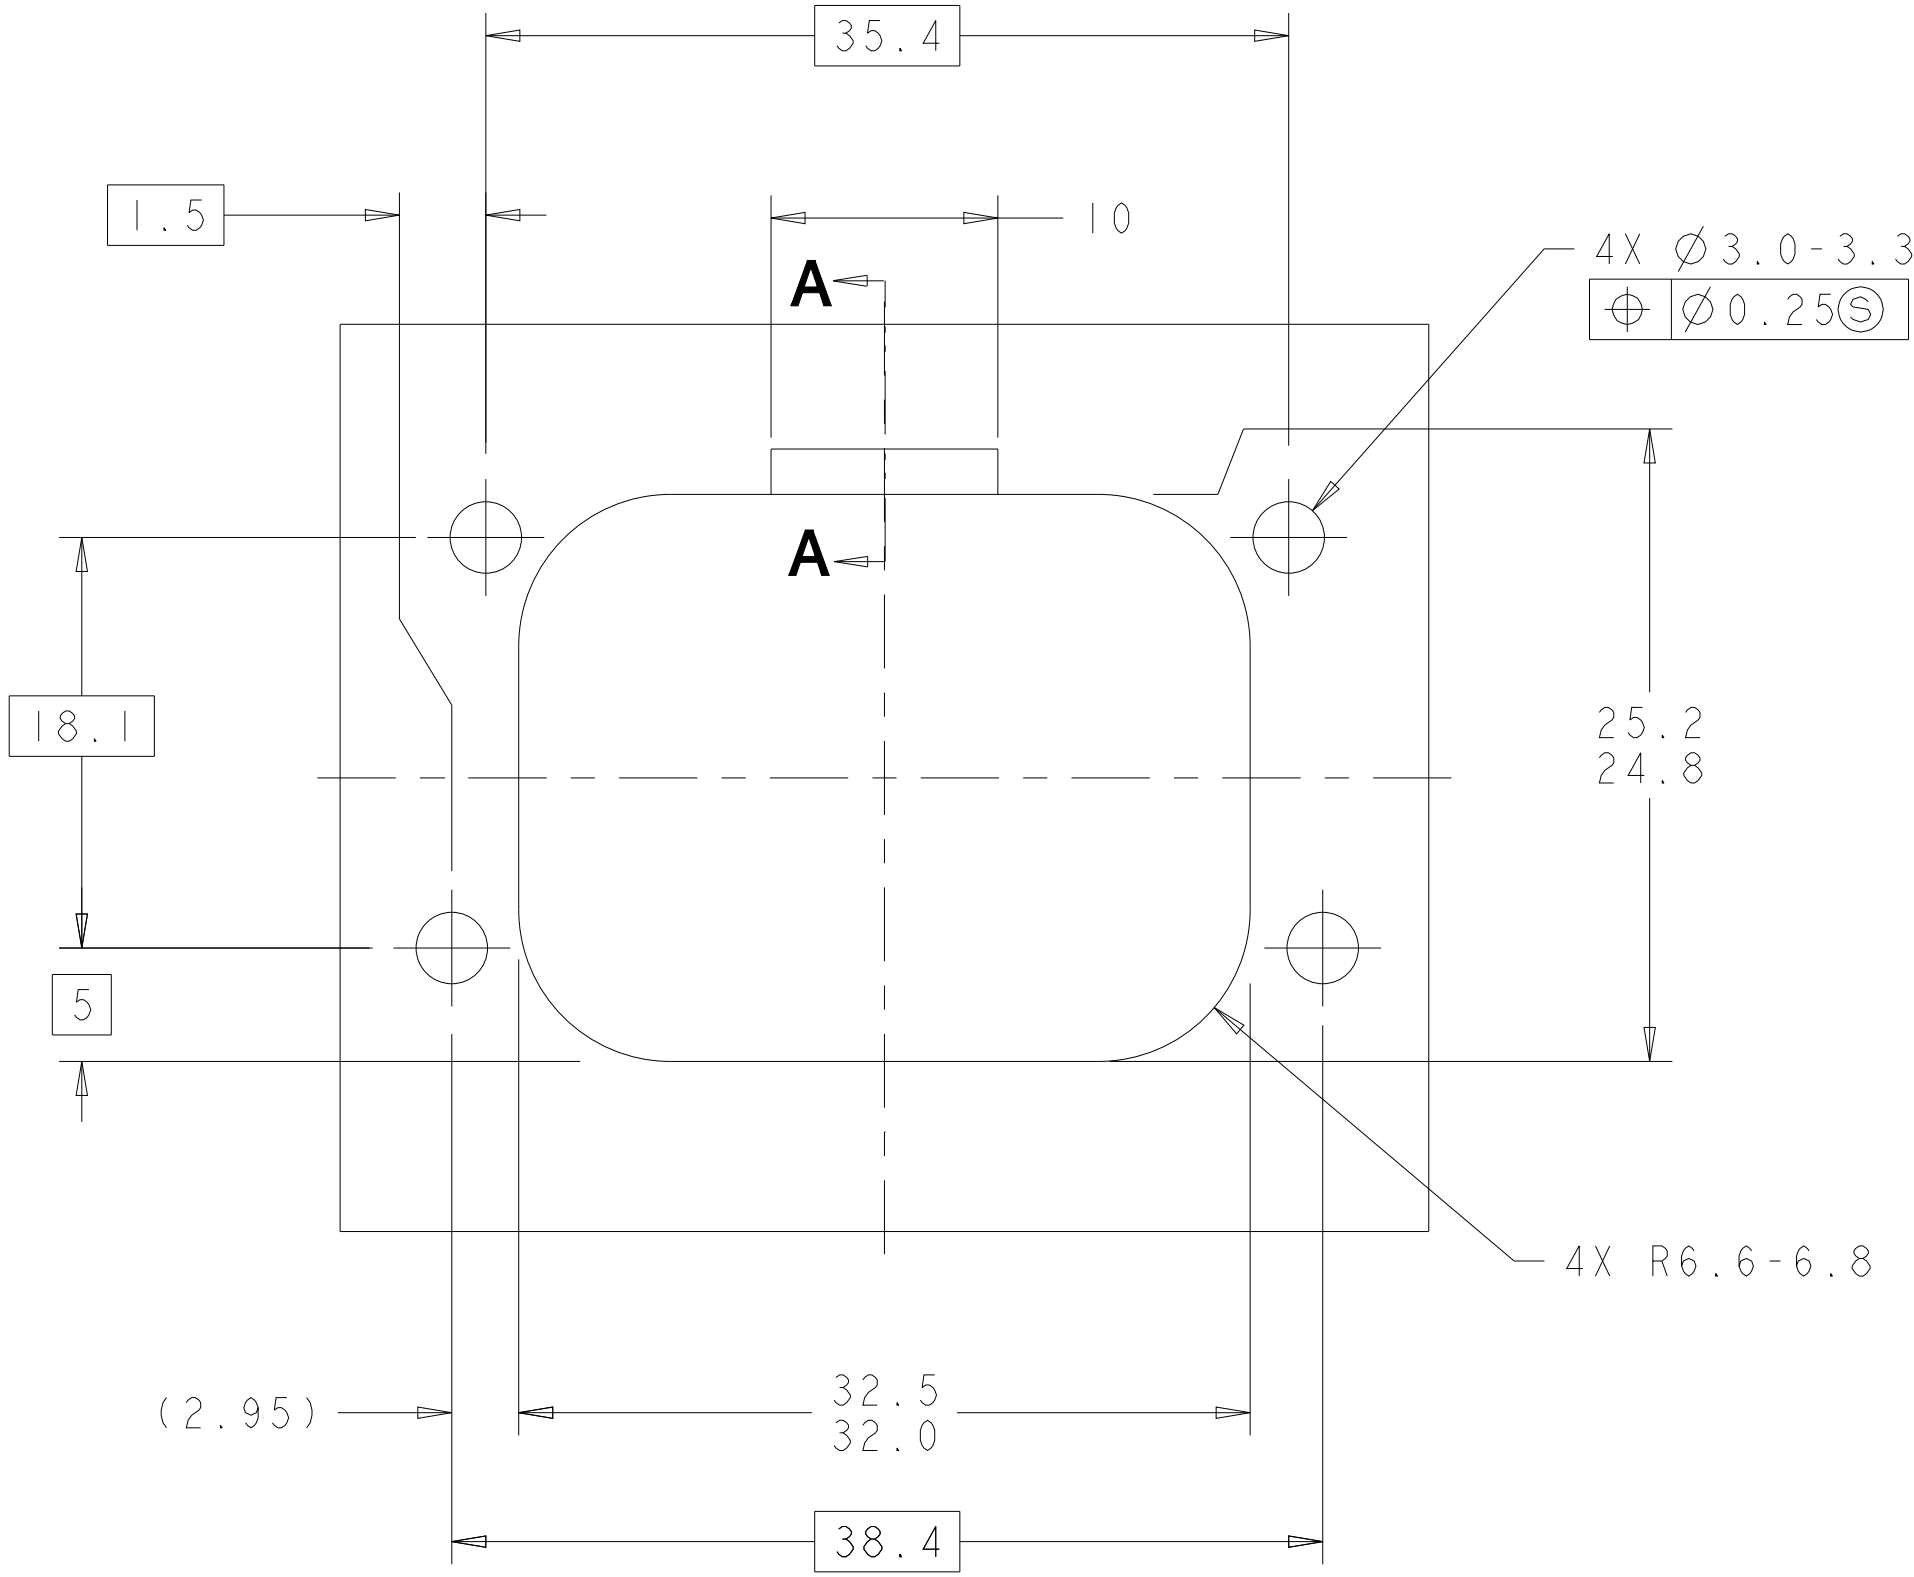



RECOMMENDED MOUNTING HOLE LAYOUT
FOR 5.0 MAX THICK PANEL

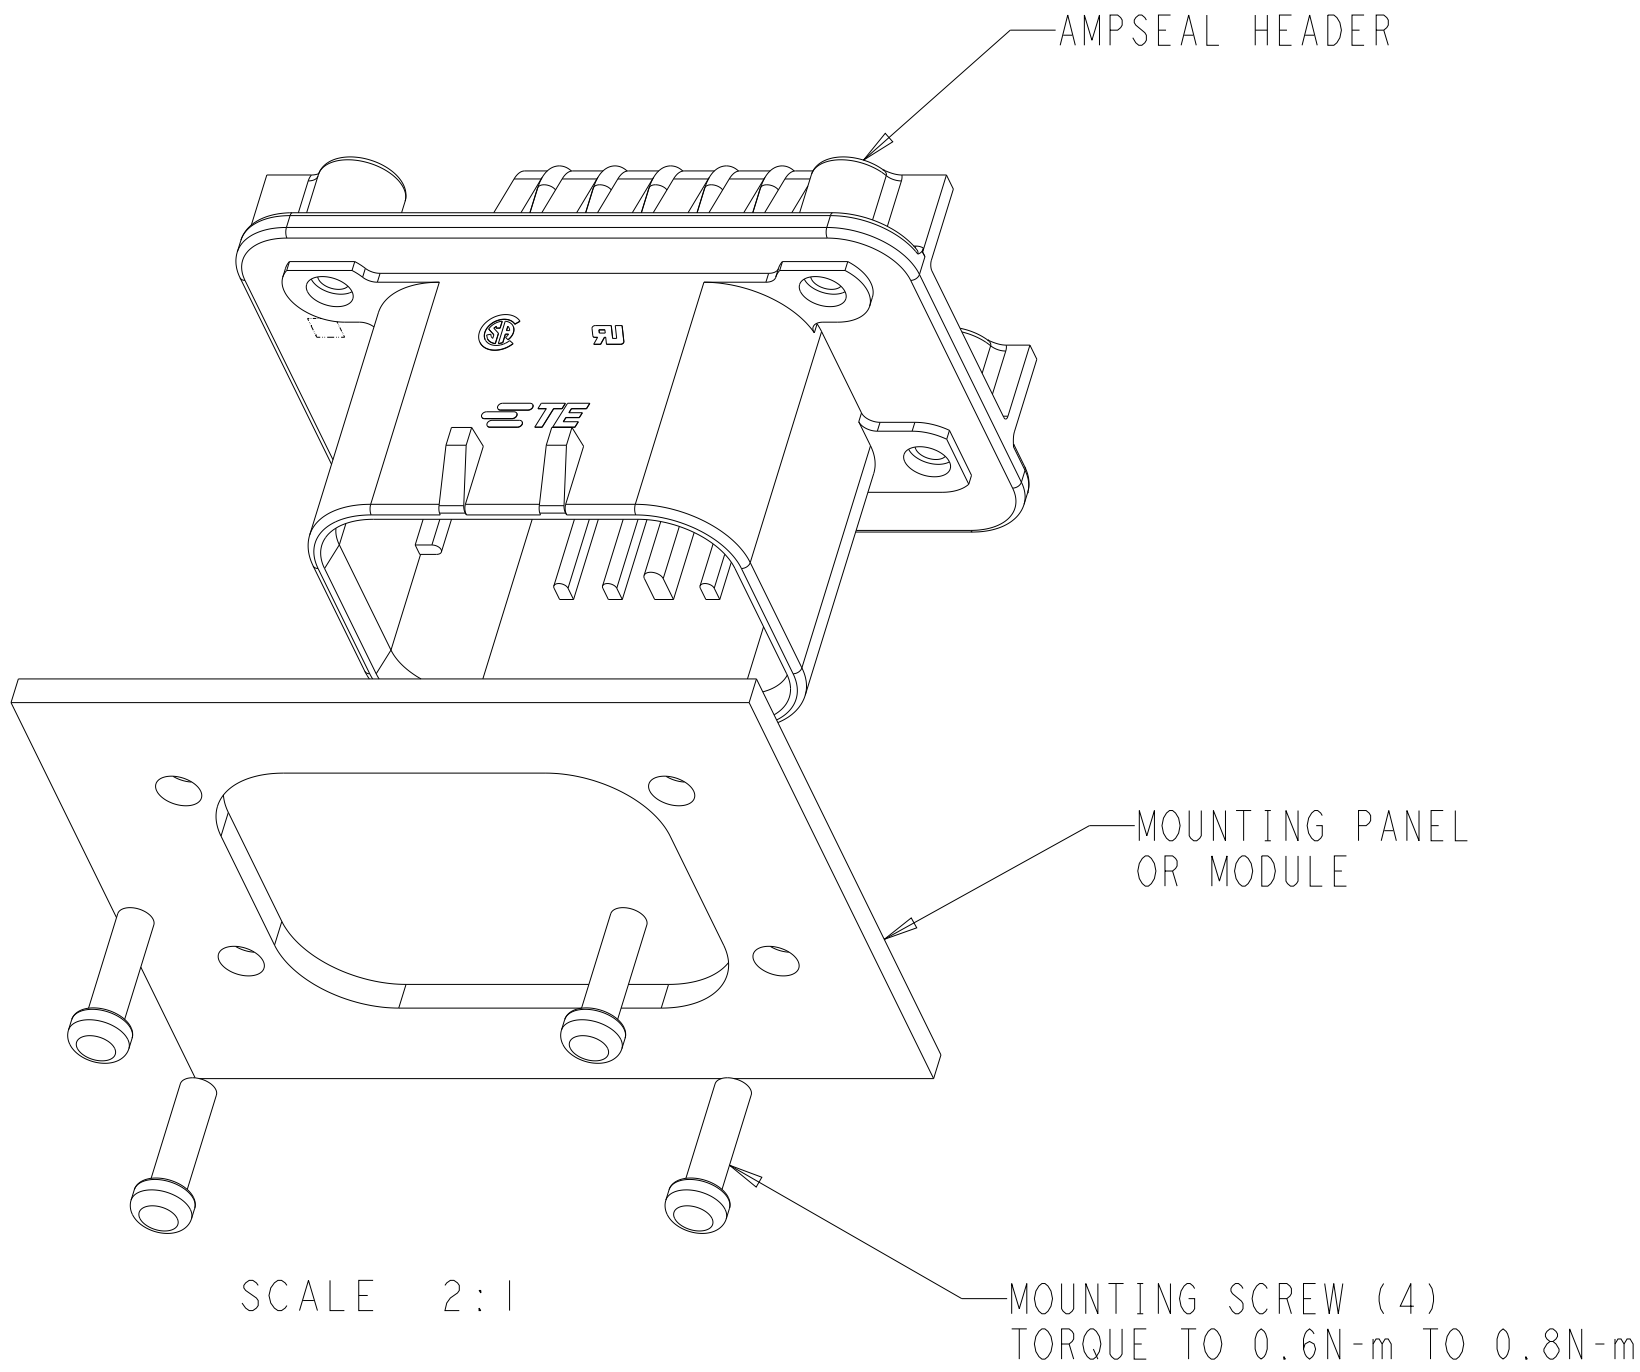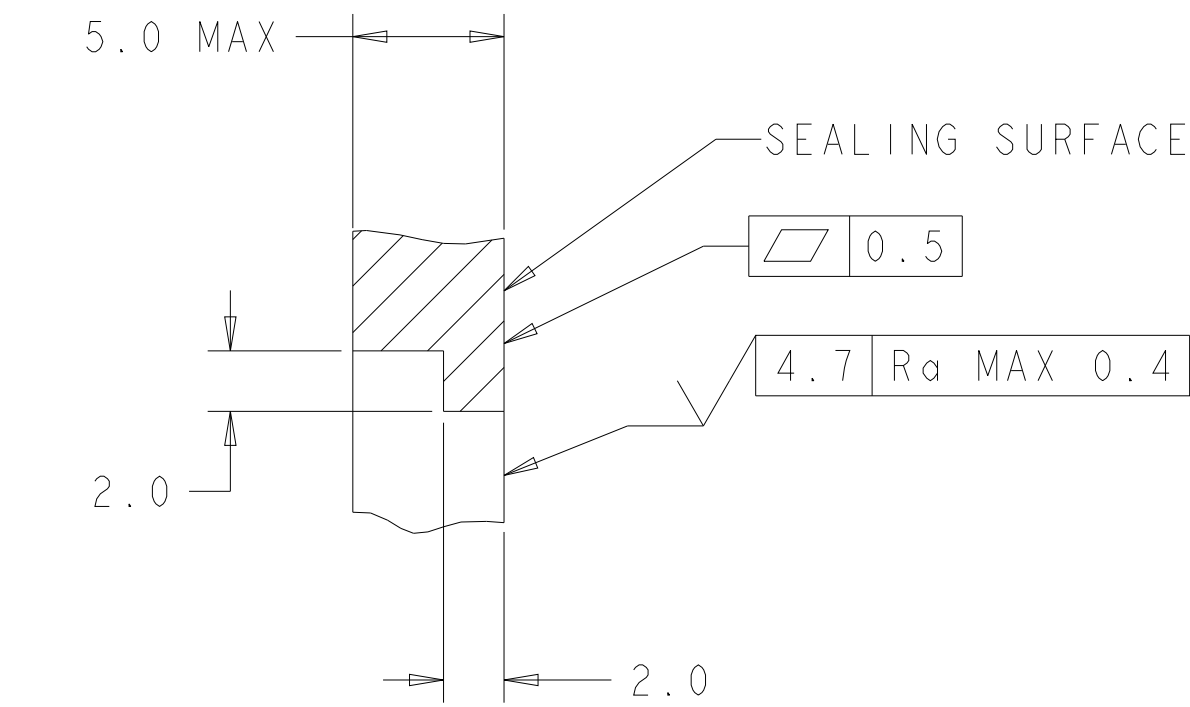


SECTION A-A
OPTIONAL CONSTRUCTION IF
THICKNESS IS GREATER THEN 2.0

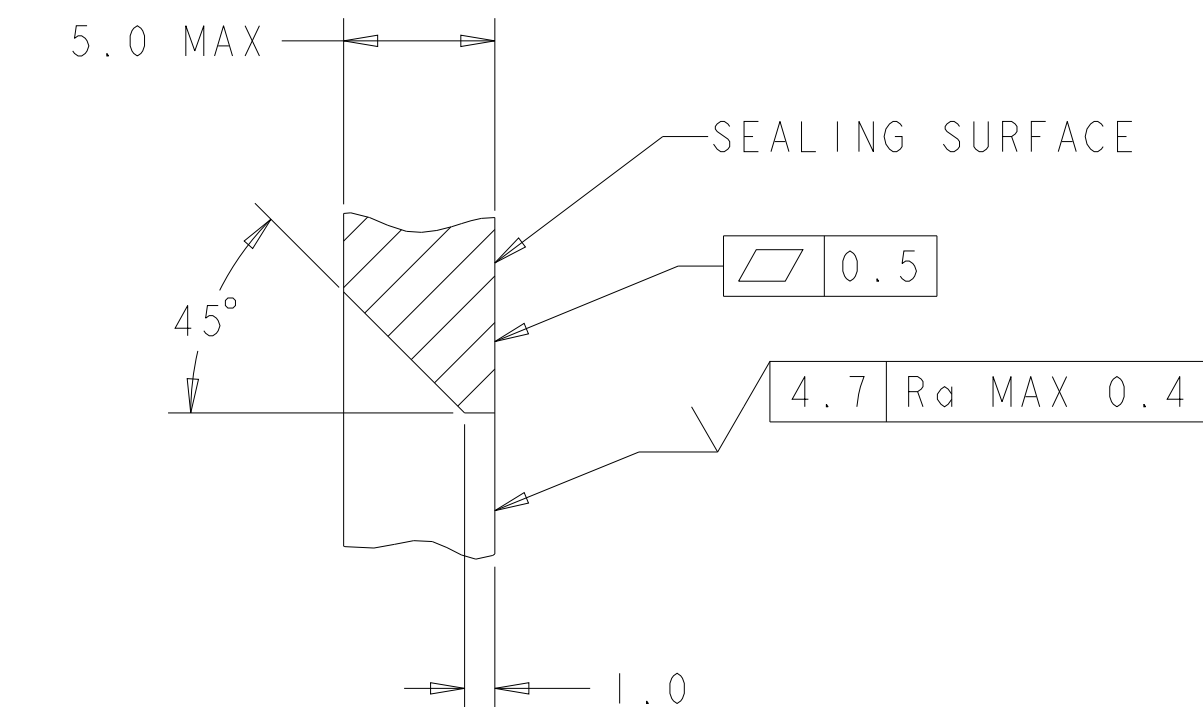


SECTION A-A
OPTIONAL CONSTRUCTION IF
THICKNESS IS GREATER THEN 2.0

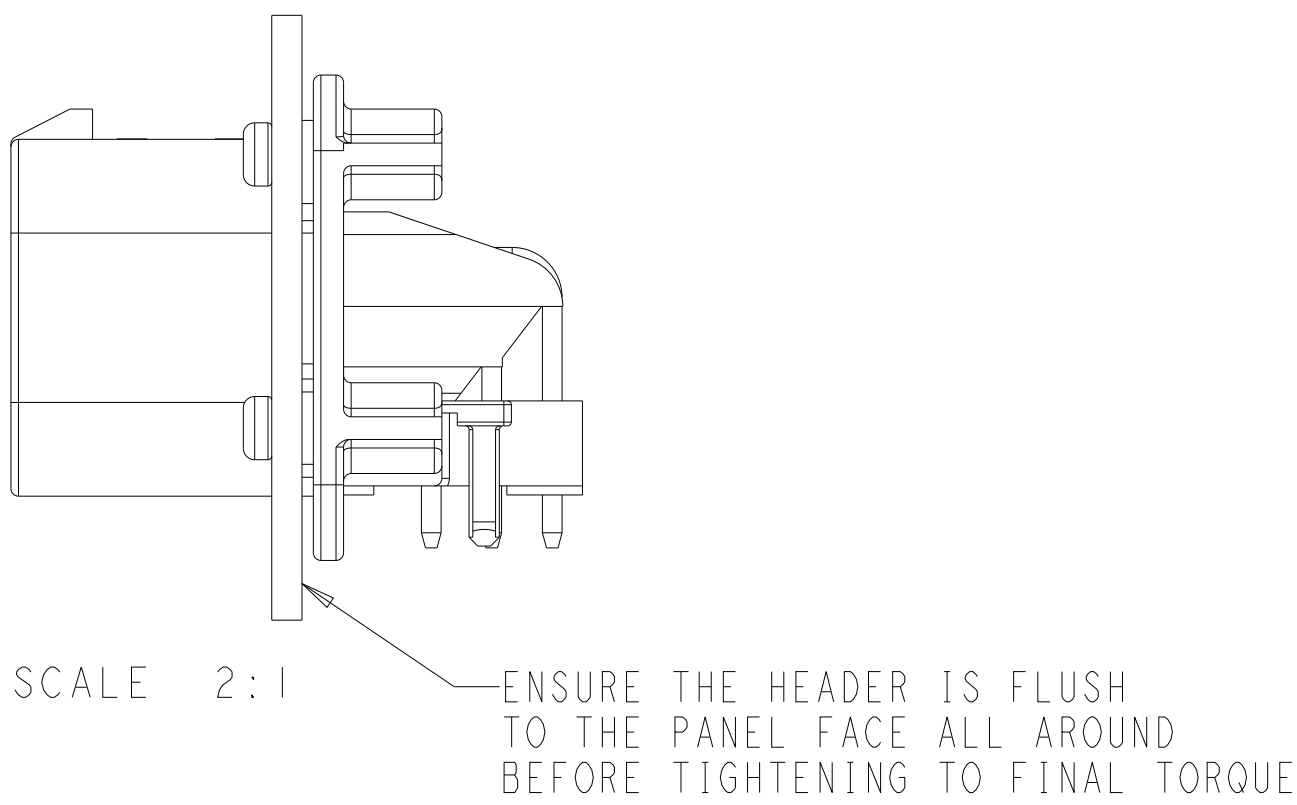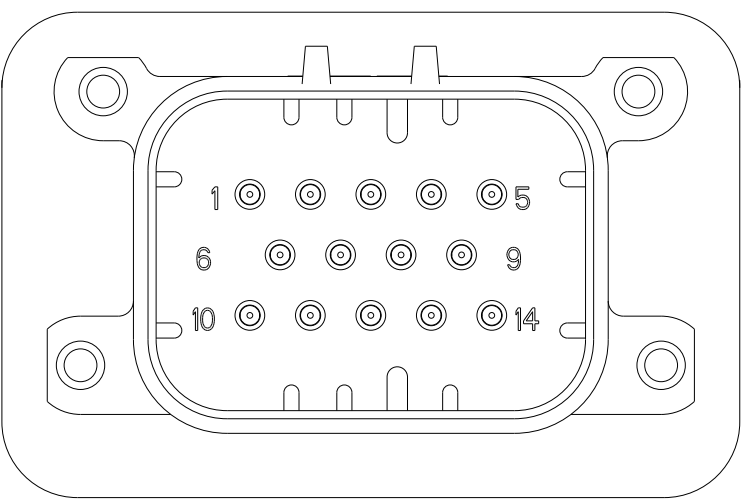


776266-1 & 1-776266-1
KEY LOCATION
SCALE 2:1

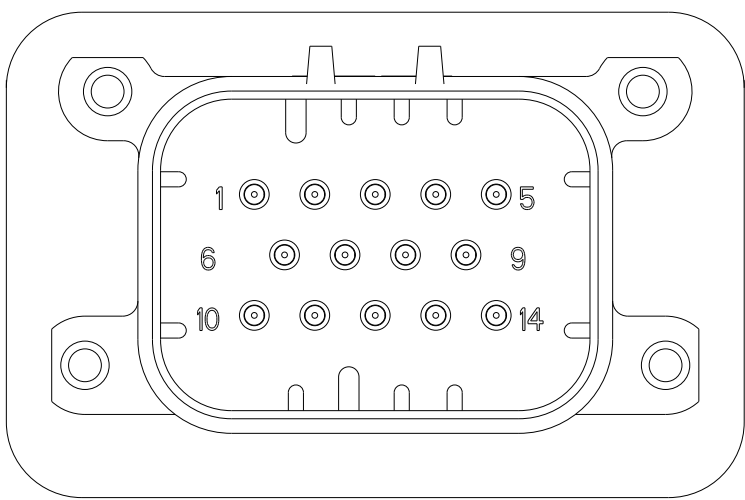

776266-2 & 1-776266-2
KEY LOCATION
SCALE 2:1

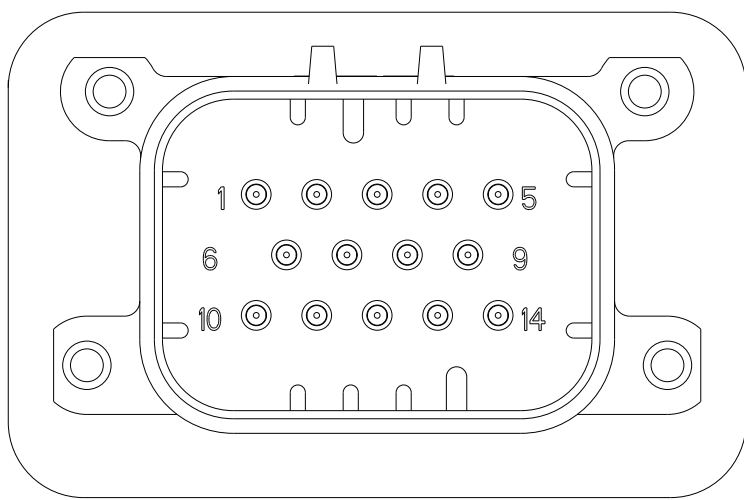

776266-4 & 1-776266-4
KEY LOCATION
SCALE 2:1

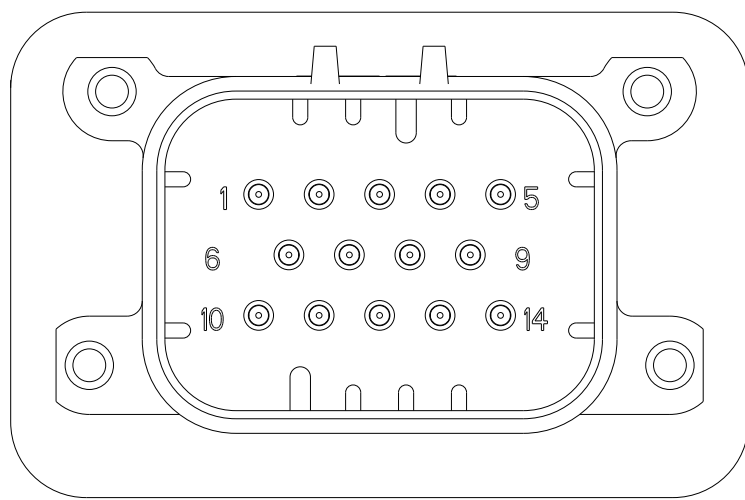

776266-5 & 1-776266-5
KEY LOCATION
SCALE 2:1

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN D. DRUMMOND 18AUG2010	TE Connectivity		
DIMENSIONS:		CHK D. STRAUSSER 18AUG2010			
mm	TOLERANCES UNLESS OTHERWISE SPECIFIED:	APVD D. STRAUSSER 18AUG2010	NAME		
	0 PLC ±0.2	PRODUCT SPEC	HEADER ASSEMBLY, 14 POSITION, RIGHT ANGLE, AMPSEAL		
	1 PLC ±0.13	108-1329			
	2 PLC ±0.13	APPLICATION SPEC	SIZE CAGE CODE DRAWING NO		
	3 PLC ±0.13	114-16016			
MATERIAL	FINISH	WEIGHT	A100779C=776266		
-	-	-			
CUSTOMER DRAWING		SCALE 4:1	SHEET 2 OF 2	REV C	