

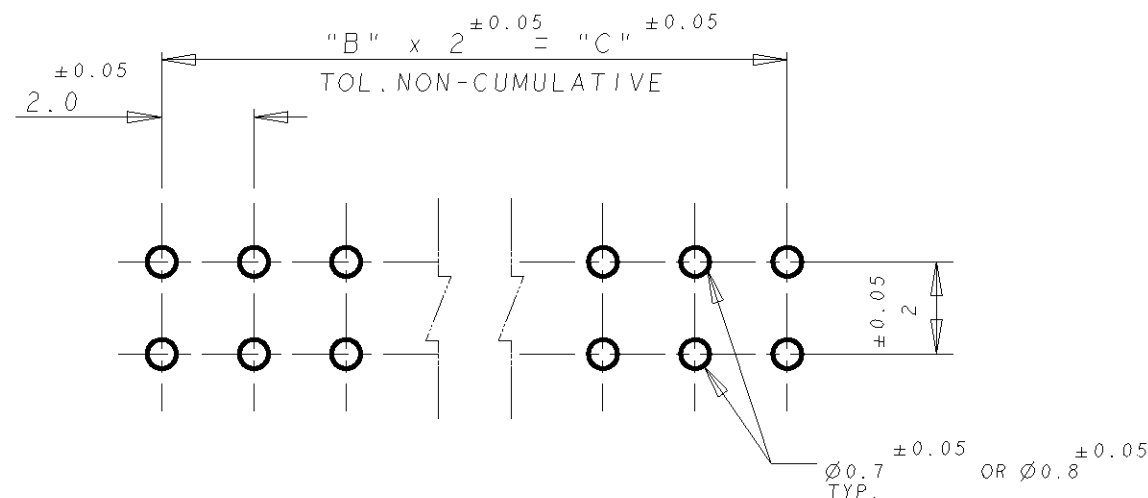


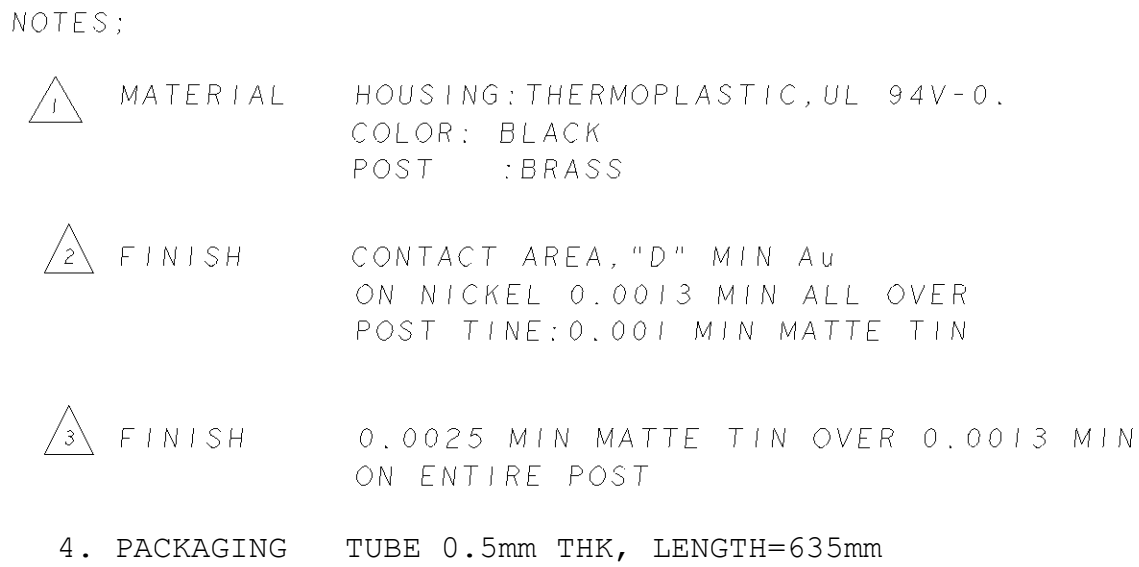

PCB THICKNESS: 1.6 ± 0.1

RECOMMENDED HOLE LAYOUT

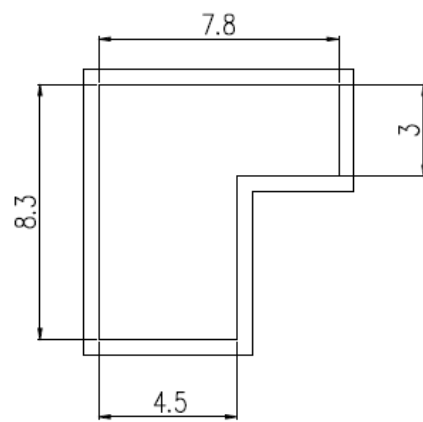

OBSOLETED		NIL	NIL	14	7	16	16	5-		-3
		NIL	NIL	38	19	40	40	5-		-2
		5, 16		14	7	16	16	5-		-1
		3, 16		14	7	16	16	5-		-0
		1, 8		6	3	8	8	4-		-9
		NIL		48	24	50	50	4-		-8
				46	23	48	48	4-		-7
				44	22	46	46	4-		-6
				40	20	42	42	4-		-4
				36	18	38	38	4-		-2
				34	17	36	36	4-		-1
				32	16	34	34	4-		-0
				30	15	32	32	3-		-9
				26	13	28	28	3-		-7
				20	10	22	22	3-		-4
OBSOLETE			18	9	20	20	3-		-3	
			16	8	18	18	3-		-2	
			12	6	14	14	3-		-0	
			4	2	6	6	2-		-6	
			0.76 μm	2	1	4	4	2-		-5
OBSOLETE			48	24	50	50	2-		-4	
			46	23	48	48	2-		-3	
			44	22	46	46	2-		-2	
			42	21	44	44	2-		-1	
OBSOLETE			40	20	42	42	2-		-0	
			38	19	40	40	1-		0	
			36	18	38	38	1-		8	
			30	15	32	32	1-		-5	
OBSOLETE			28	14	30	30	1-		-4	
			24	12	26	26	1-		-2	
			16	8	18	18			0	
			14	7	16	16			-7	
			12	6	14	14			-6	
OBSOLETE			10	5	12	12			-5	
			8	4	10	10			-4	
			6	3	8	8			-3	
			0.2 μm	2	1	4	4	5176837-1		
	FINISH	PIN OMITTED	"D"	"C"	"B" SPACES	"A" REF	NO OF POS	ASS'Y P/N		

		DWN 07MAR2005 WYLEE CHK VINCENT TAN APVD SE LFONG PRODUCT SPEC - APPLICATION SPEC - WEIGHT -		 TE Connectivity	
DIMENSIONS: mm 		TOLERANCES, UNLESS OTHERWISE SPECIFIED: 0 PLC ±0.25 1 PLC ±0.2 2 PLC ±0.2 3 PLC ±- 4 PLC ±- ANGLES ±-		NAME AMPMODU 2mm PITCH POST HDR, HORIZONTAL TYPE, L=2.6	
GENERAL TOLERANCE 0<+ 10 : ±0.2 10<+ 30 : ±0.25 30<+ 100 : ±0.3 ANGLES : ±3°		MATERIAL 		SIZE A2	
		FINISH  		CAGE CODE 00779	
				DRAWING NO C=5176837	
				SCALE -	
				SHEET 1 OF 1	
				REV S1	
CUSTOMER DRAWING					