

D

C

B



A

D

C

B

A

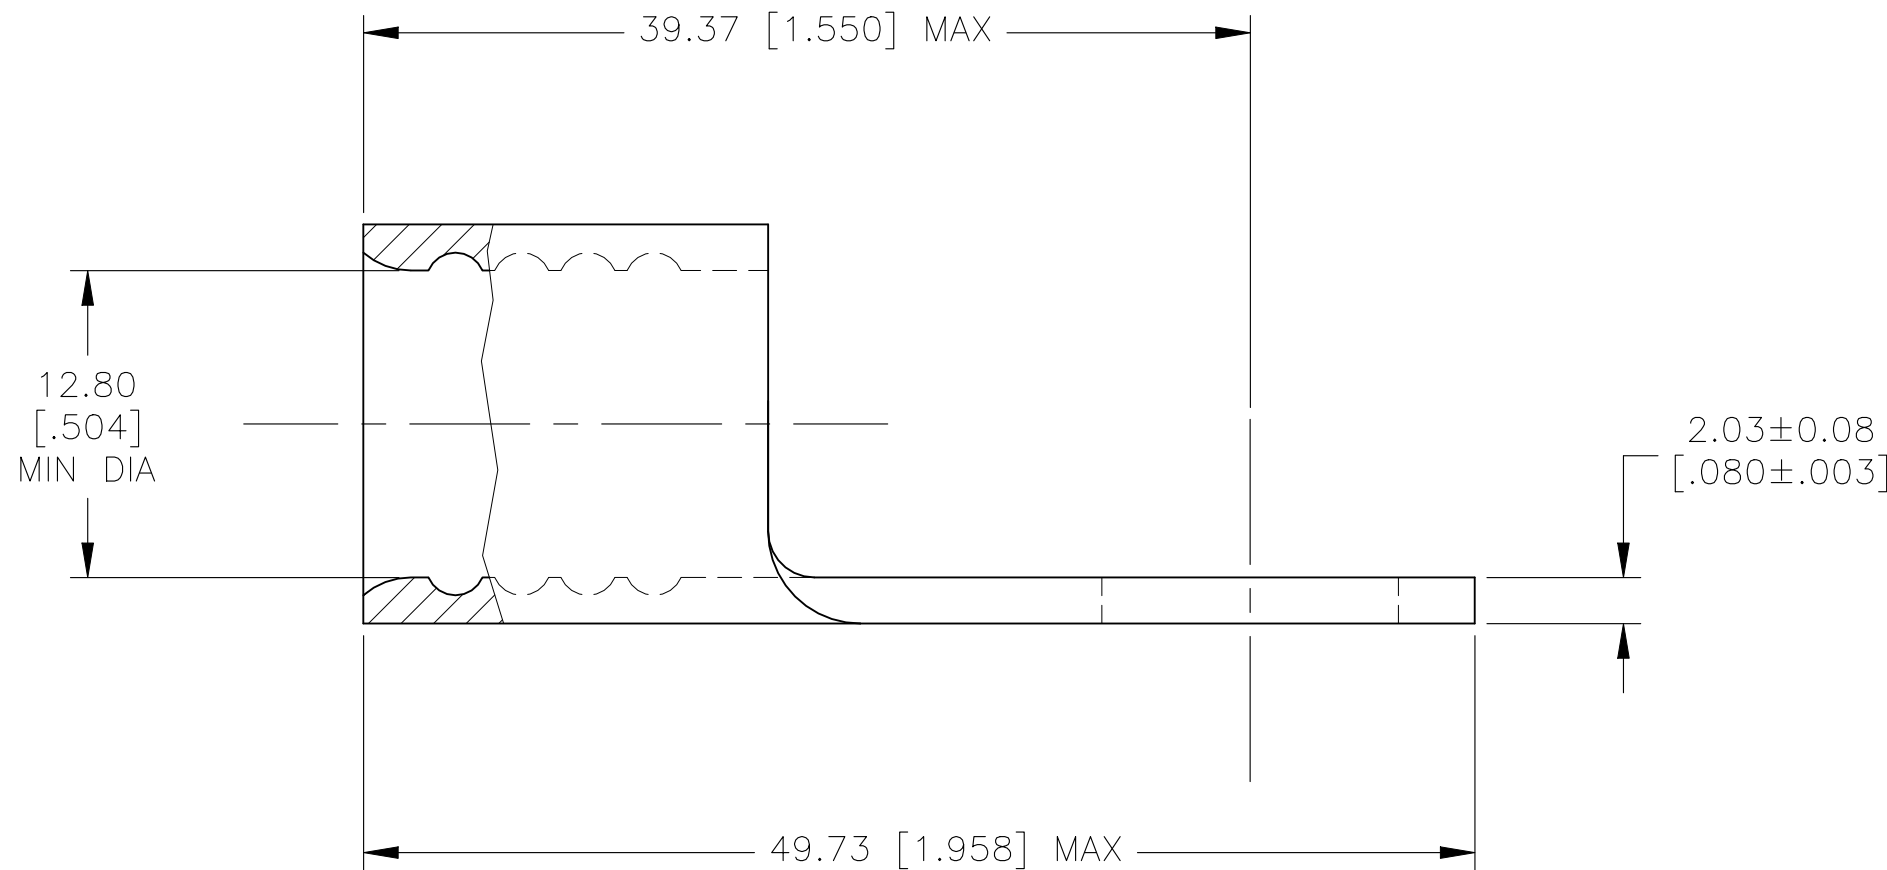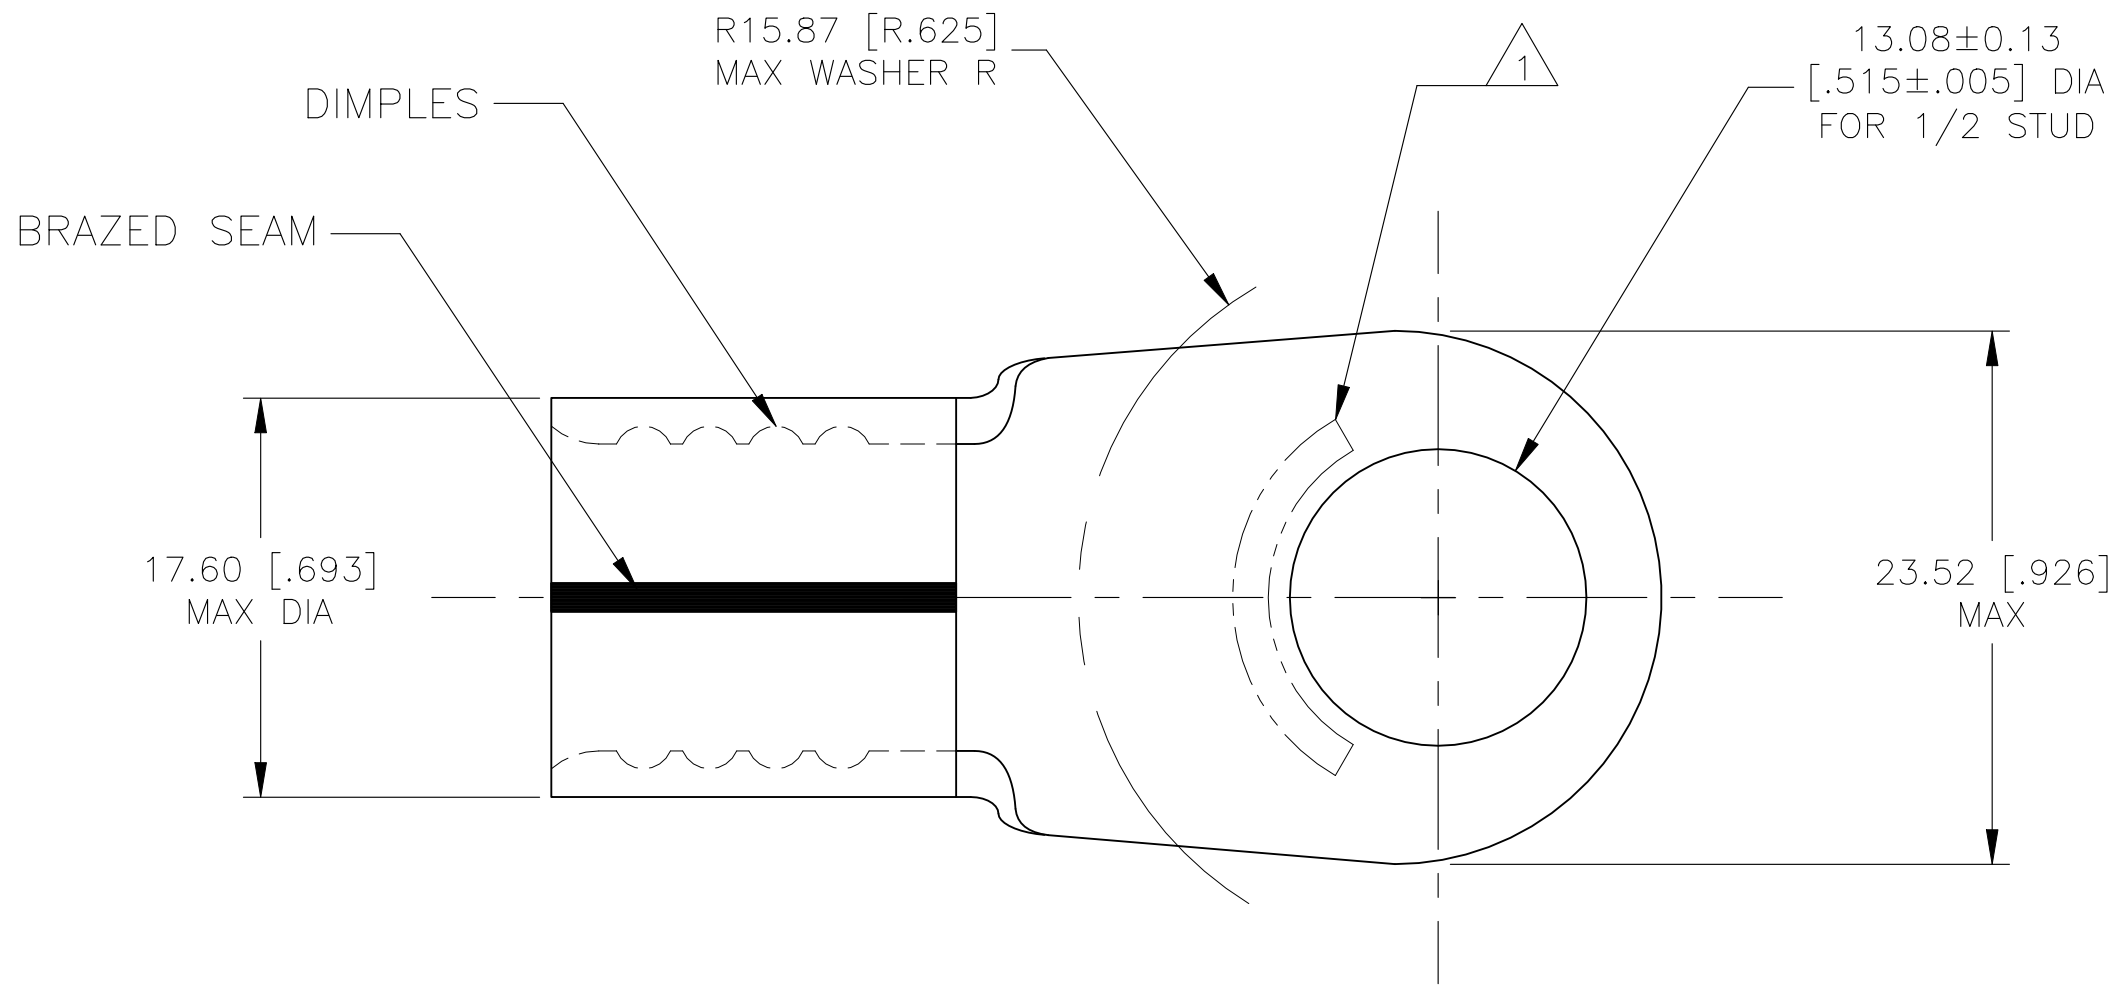

AMP WIRE RANGE	Listed FILE E13288	LR7189 Certified
2/0 AWG SOLID OR STRANDED	2/0 AWG STRANDED	2/0 AWG SOLID OR STRANDED

- 1 STAMP AMP 2/OW* APPROX AS SHOWN.
- 2 TIN PLATE 0.00254 [.000100] MIN THK PER ASTM B-545.
- 3 BRIGHT TIN LEAD PLATE 0.00254[.000100] MIN EXT THK PER B-545.
- 4 COPPER PER ASTM B-152, ANNEALED.
- 5 NOTE DELETED
- 6 NICKEL PLATE 0.00762[.00030] MIN EXT. THK. PER SAE AMS QQ-N-290.
- 7 NOT UL OR CSA APPROVED FOR STRANDED WIRE ONLY.

170°C[338°F]	50	LOOSE PIECE	3	2-321873-2
343°C[650°F]	50	LOOSE PIECE	6	321873-2
170°C[338°F]	50	LOOSE PIECE	2	321873
MAX RECOMMENDED OPERATING TEMP.	QTY	PACKAGE TYPE	FINISH	PART NO.
7	THIS DRAWING IS A CONTROLLED DOCUMENT.	DWN DK. SCHRUM 1/14/94 CHK AJ KAUFMAN 1/19/94 APVD JL MECKLEY 1/19/94	TE Connectivity	
SEE TABLE	DIMENSIONS: MM [INCHES]	TOLERANCES, UNLESS OTHERWISE SPECIFIED: 0 PLC ± - 1 PLC ± - 2 PLC ± 0.20[.008] 3 PLC ± - 4 PLC ± - ANGLES ± -	NAME TERMINAL, RING TONGUE, SOLISTRAND	
VOLTAGE RATING: N/A		PRODUCT SPEC APPLICATION SPEC	SIZE A2	CAGE CODE 00779
CIRCULAR MIL AREA: 60.6-76.3mm² [119,500-150,500] SOLID OR STRANDED	MATERIAL 4	FINISH SEE TABLE	DRAWING NO C-321873	RESTRICTED TO -
		WEIGHT -	SCALE 2:1	SHEET 1 OF 1
		CUSTOMER DRAWING	REV H2	