


© 2025 TE Connectivity. All Rights Reserved.

REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	B	ECR-15-014907	14OCT2015	DL	CW
	B1	ECR-16-011987	08NOV2016	QY	CW
	C	ECR-21-108559	06AUG2021	BS	CW
	D	ECR-25-256074	08SEP2025	ABS	RB

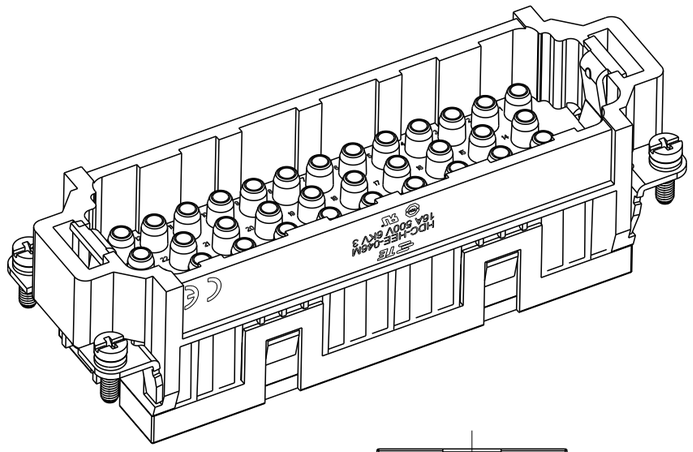



M4 SCREW, RECOMMENDED TIGHTENING TORQUE 1.2Nm
M4螺丝，推荐锁紧力矩1.2Nm

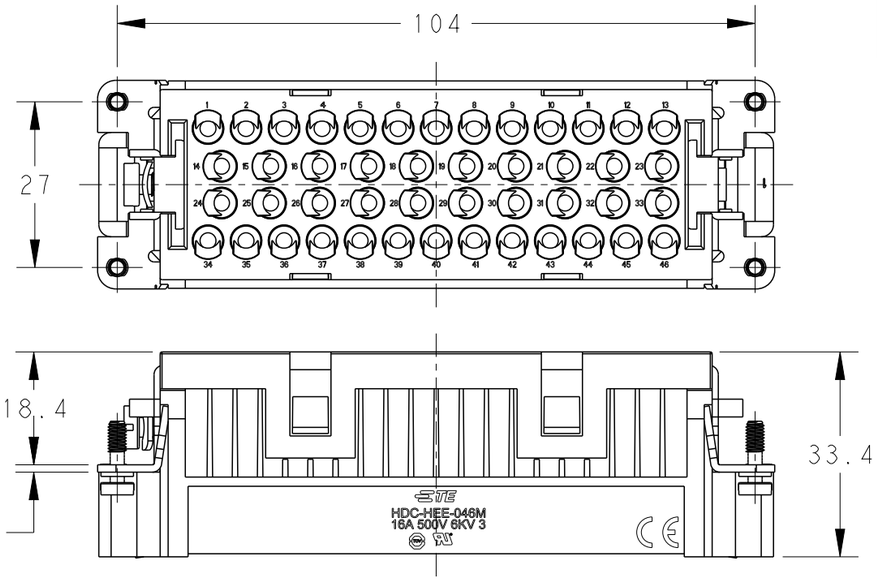


4X M3 SCREW, RECOMMENDED TIGHTENING TORQUE 0.5Nm
4X M3螺丝，推荐锁紧力矩0.5Nm

NOTES:
1. TECHNICAL CHARACTERISTICS:
   INSULATION MATERIAL: PC
   RATED VOLTAGE: 500 V
   RATED CURRENT: 16 A
   INSULATION RESISTANCE: >=400MΩ
   RATED IMPULSE VOLTAGE: 6 KV
   POLLUTION DEGREE: 3
   FLAMMABILITY: UL94V-0
   MATING CYCLES: 500 CYCLES
   WIRE RANGE: 0.14-4 mm² (26-12 AWG)
   CONTACT TYPE: CRIMP CONTACT
2. CONTACT NEED TO BE ORDERED SEPARATELY.
   (ORDER No. REFER TO DRAWING:T20300X10XX000)

注释：
1. 技术参数：
   绝缘材料： PC
   额定电压： 500V
   额定电流： 16A
   绝缘电阻： >=400MΩ
   额定脉冲电压： 6 KV
   污染等级： 3
   阻燃等级： UL94V-0
   插拔次数： 500次
   接线范围： 0.14-4 mm² (26-12 AWG)
   接线类型： 冷压接
2. 端子需要单独订购。
   （订货号参考图面： T20300X10XX000）

PANEL CUT FOR INSERTS FOR USE WITHOUT HOODS/ HOUSINGS
不使用防护外壳时芯件的安装开孔图

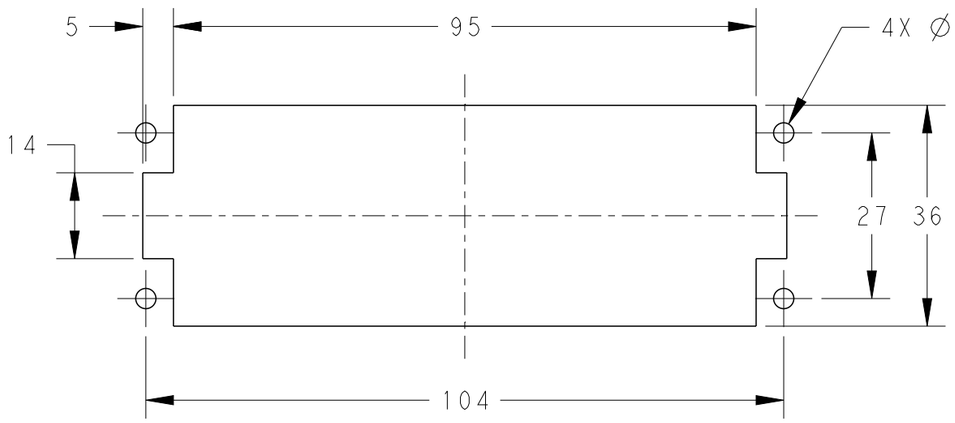

TYPE 1, T2050462101-000, WITH TE LOGO
类型 1, T2050462101-000, TE LOGO

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: mm	TOLERANCES UNLESS OTHERWISE SPECIFIED:
	0 PLC ±- 1 PLC ±- 2 PLC ±- 3 PLC ±- 4 PLC ±- ANGLES ±-
MATERIAL - -	FINISH - -

DWN	11JUN2014 David Wang
CHK	11JUN2014 Chris Wang
APVD	11JUN2014 Xiang Xu
PRODUCT SPEC	108-106137
APPLICATION SPEC	114-106137
WEIGHT	-

TE Connectivity

NAME HEE-046-M


SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A3	00779	C-T2050462101000	-


CUSTOMER DRAWING | SCALE 1:1 | SHEET 1 OF 2 | REV D


1470-19 (3/13)


© 2025 TE Connectivity. All Rights Reserved.

REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	-	SEE SHEET 1	-	-	-

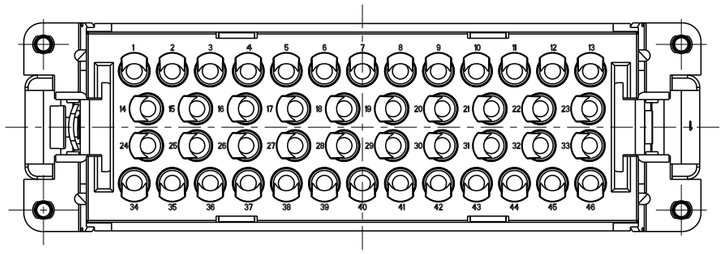




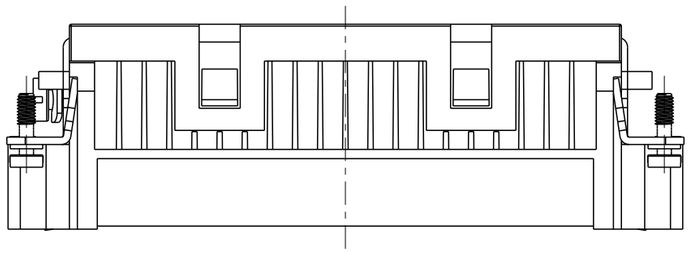

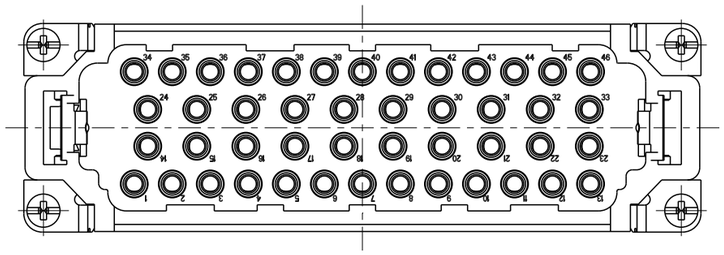

NOTE:
ALL SPEC REFER TO TYPE 1

注释：
所有产品规范参照 TYPE 1

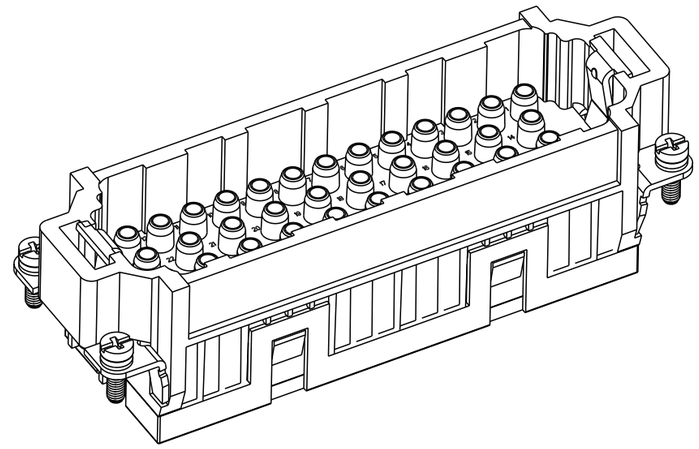

TYPE-2,T2050462101-002,WITH STAINLESS STEEL SCREW,WITHOUT LOGO
类型-2,T2050462101-002,带不锈钢螺丝,无LOGO

PART NUMBER 料 号	PART DESCRIPTION 描 述	TYPE 类 型
T2050462101-002	HEE-046-M HEE-046 MALE INSERT, WITH STAINLESS STEEL SCREW,WITHOUT LOGO HEE-046 公插,带不锈钢螺丝,无LOGO	TYPE-2 类型-2
T2050462101-000	HEE-046-M HEE-046 MALE INSERT HEE-046 公插	TYPE-1 类型-1

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: mm

TOLERANCES UNLESS OTHERWISE SPECIFIED:
0 PLC ±-
1 PLC ±-
2 PLC ±-
3 PLC ±-
4 PLC ±-
ANGLES ±-

MATERIAL: - / -

FINISH: - / -

DWN David Wang 11JUN2014
CHK Chris Wang 11JUN2014
APVD Xiang Xu 11JUN2014

PRODUCT SPEC: 108-106137

APPLICATION SPEC: 114-106137

WEIGHT: -

TE Connectivity

NAME: HEE-046-M

SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A3	00779	C-T2050462101000	-

CUSTOMER DRAWING

SCALE 1:1 SHEET 2 OF 2 REV D