

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

— , — .

© COPYRIGHT — By —

ALL RIGHTS RESERVED.

LOC	
G	

DIST
86

REVISIONS

	F
--	---

LTR

DESCRIPTION

DATE _____

	DWN
--	-----

	APVD
--	------


D1

REVISÉ PER ECO-14-003208

17MAR2014

	NK
--	----


	DR
--	----

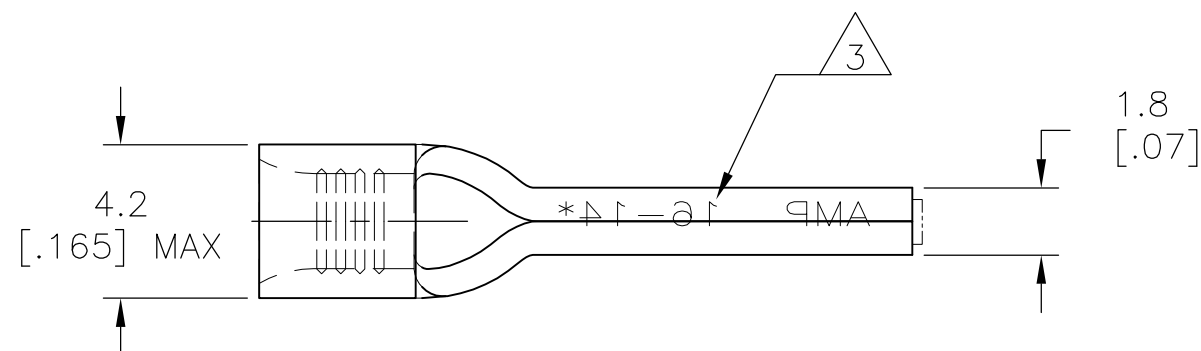

1 TIN PLATE 0.00254[.000100] MIN EXT THK
PER ASTM B545

2 OPERATING TEMP 170°C[338°F] MAX

3 STAMP AMP 16-14* APPROX AS SHOWN

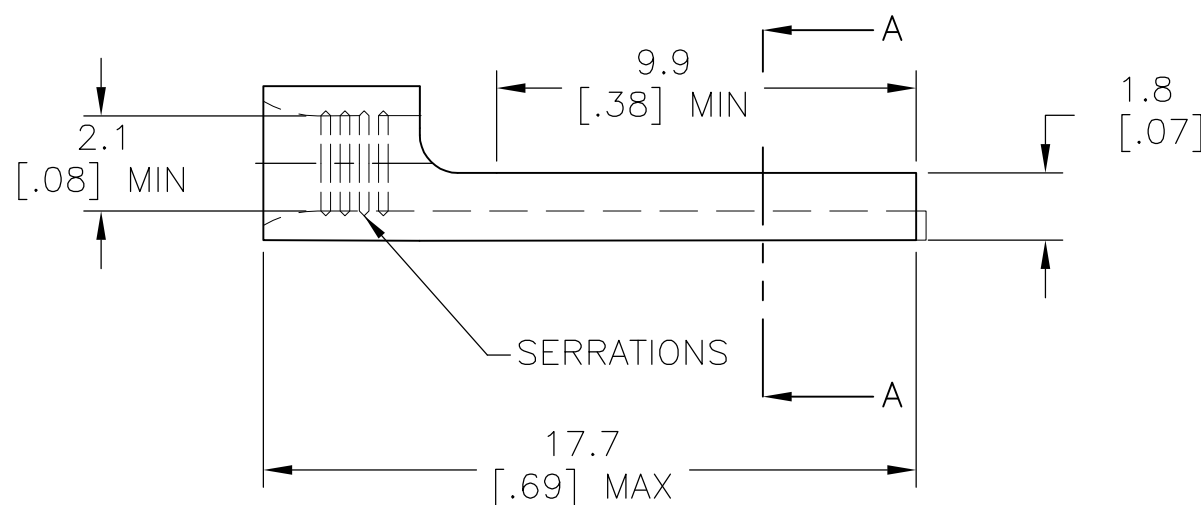

SECTION A-A


R0.5
[.02] REF

R0.9
[R.03] REF

R0.5
02] REF

R0.9
[R.03] REF

1000	LOOSE PIECE		COPPER PER ASTM B-152	165170
QTY	PACKAGE TYPE	FINISH	MATERIAL	PART NO

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN JR RUTH 31MAY07		TE Connectivity				
		CHK T MICHELUTTI 31MAY07						
DIMENSIONS: mm [INCHES]		TOLERANCES UNLESS OTHERWISE SPECIFIED:		NAME				
		APVD T MICHELUTTI 31MAY07		SOLISTRAND WIRE PIN (LONG) 16-14 —				
		PRODUCT SPEC —						
		APPLICATION SPEC —						
		MATERIAL —		FINISH —		SIZE	CAGE CODE	DRAWING NO
		WEIGHT —		A3	00779	C-165170	—	
CUSTOMER DRAWING						SCALE	SHEET	REV
						5:1	1 OF 1	D1