



© 2025 TE Connectivity. All Rights Reserved.

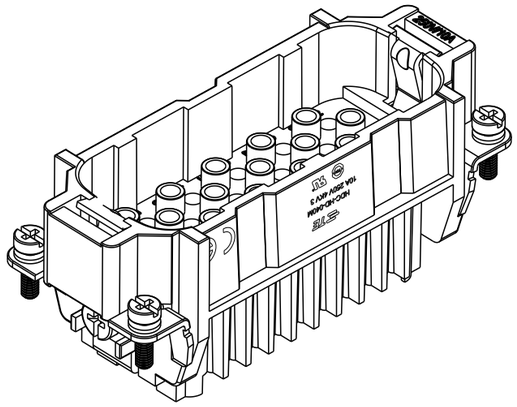

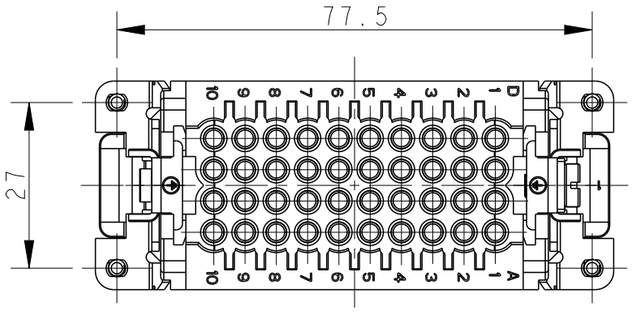



M4 SCREW RECOMMENDED
TIGHTENING TORQUE 1.2Nm
M4 螺丝，推荐锁紧力矩1.2Nm



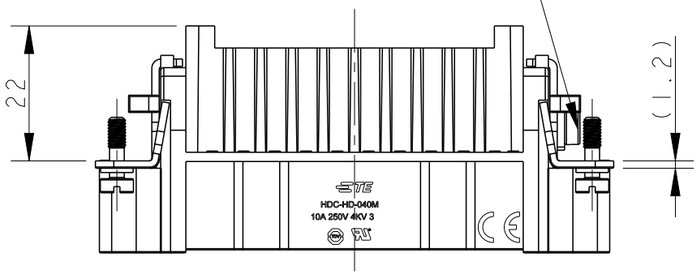

4X M3 SCREW RECOMMENDED
TIGHTENING TORQUE 0.5Nm
4X M3螺丝，推荐锁紧力矩0.5Nm

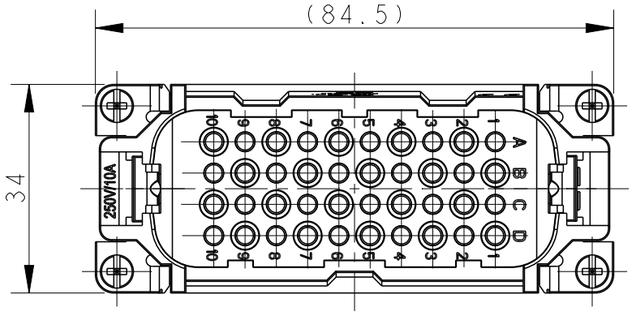

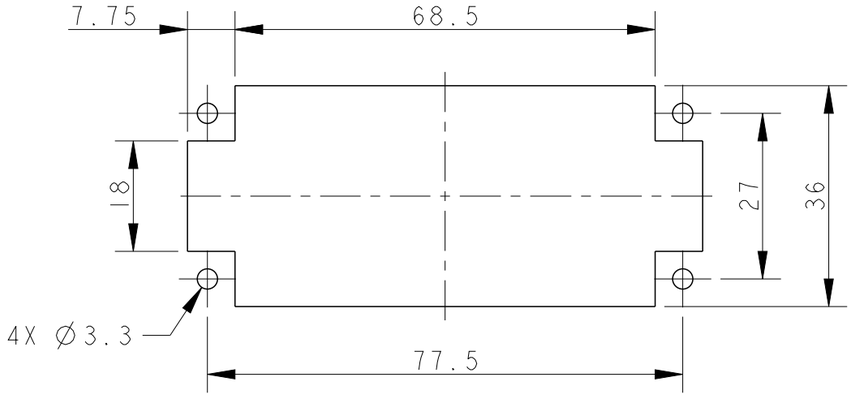

PANEL CUT OUT FOR INSERTS FOR USE
WITHOUT HOODS/HOUSINGS
不用防护外壳时芯件的安装开孔图

REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	B1	ECR-15-017530	02DEC2015	GY	CW
	B2	ECR-16-015492	08NOV2016	QY	CW
	C	ECR-21-105750	30JUN2021	BS	CW
	D	ECR-25-246911	26JUN2025	ABS	RB

NOTES:
1. TECHNICAL CHARACTERISTICS:
   INSULATION MATERIAL: PC
   RATED VOLTAGE: 250 V
   RATED CURRENT: 10 A
   INSULATION RESISTANCE: >=400MΩ
   RATED IMPULSE VOLTAGE: 4 KV
   POLLUTION DEGREE: 3
   FLAMMABILITY: UL94V-0
   MATING CYCLES: 500 CYCLES
   WIRE RANGE: 0.14-2.5 mm² (26-14 AWG)
   CONTACT TYPE: CRIMP CONTACT
2. CONTACT NEED TO BE ORDERED SEPARATELY.
   (ORDER No. REFER TO DRAWING:T20200X10XX000)

注释：
1. 技术参数：
   绝缘材料： PC
   额定电压： 250V
   额定电流： 10A
   绝缘电阻： >=400MΩ
   额定脉冲电压： 4 KV
   污染等级： 3
   阻燃等级： UL94V-0
   插拔次数： 500次
   接线范围： 0.14-2.5 mm² (26-14 AWG)
   接线类型： 冷压接
2. 端子需要单独订购。
   （订货号参考图面： T20200X10XX000）

TYPE-1,T2020402101-000,TE LOGO
类型-1,T2020402101-000,TE LOGO

TYPE-2,T2020402101-001,STAINLESS STEEL SCREW,TE LOGO
类型-2,T2020402101-001,不锈钢螺丝,TE LOGO

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: mm

TOLERANCES UNLESS OTHERWISE SPECIFIED:
0 PLC ±-
1 PLC ±-
2 PLC ±-
3 PLC ±-
4 PLC ±-
ANGLES ±-

MATERIAL -
FINISH -

DWN 16DEC2014 RAGHAVENDRA H M
CHK 16DEC2014 CHRIS WANG
APVD 16DEC2014 XU XIANG
PRODUCT SPEC 108-137042
APPLICATION SPEC 114-137042
WEIGHT -

TE Connectivity

NAME HD-040-M

SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A3	00779	C-T2020402101000	-

CUSTOMER DRAWING | SCALE 1:1 | SHEET 1 OF 2 | REV D

1470-19 (3/13)


© 2025 TE Connectivity. All Rights Reserved.


REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	-	SEE SHEET 1	-	-	-


NOTE:


SEE SHEET 1

注释：
见页 1

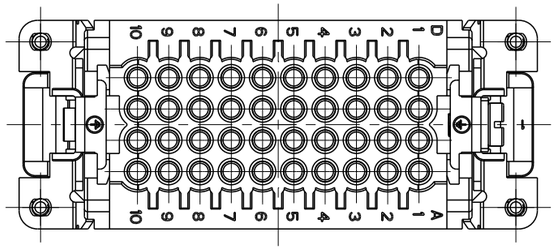


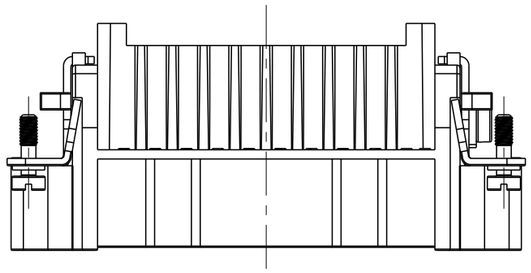



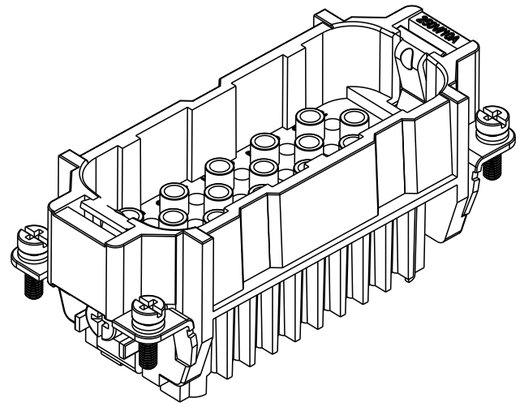

TYPE-3,T2020402101-002,STAINLESS STEEL SCREW,NO LOGO
类型-3,T2020402101-002,不锈钢螺丝,无LOGO

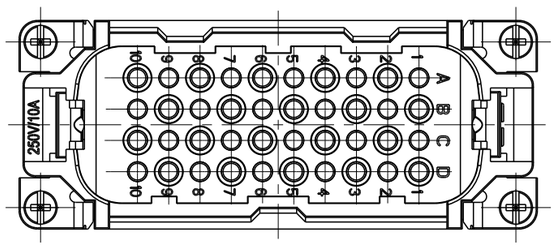

ALL DIMENSIONS ARE SAME AS TYPE 1,
EXCEPT THOSE DEFINED IN THIS TYPE.
除了在本类型中定义的尺寸外，其它尺寸同类型1

PART NUMBER 料号	PART DESCRIPTION 描述	TYPE 类型
T2020402101-002	HD-040-M HD-040 MALE INSERT, STAINLESS STEEL SCREW,NO LOGO HD-040 公插，不锈钢螺丝，无LOGO	TYPE-3 类型-3
T2020402101-001	HD-040-M HD-040 MALE INSERT,STAINLESS STEEL SCREW HD-040 公插，不锈钢螺丝	TYPE-2 类型-2
T2020402101-000	HD-040-M HD-040 MALE INSERT HD-040 公插	TYPE-1 类型-1

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: mm

TOLERANCES UNLESS OTHERWISE SPECIFIED:
0 PLC ±-
1 PLC ±-
2 PLC ±-
3 PLC ±-
4 PLC ±-
ANGLES ±-

MATERIAL -
-

FINISH -
-

DWN 16DEC2014 RAGHAVENDRA H M
CHK 16DEC2014 CHRIS WANG
APVD 16DEC2014 XU XIANG
PRODUCT SPEC 108-137042
APPLICATION SPEC 114-137042
WEIGHT -

TE Connectivity

NAME HD-040-M

SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A3	00779	C-T2020402101000	-

CUSTOMER DRAWING | SCALE 1:1 | SHEET 2 OF 2 | REV D