



THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION 20
© COPYRIGHT 20 BY - ALL RIGHTS RESERVED.

REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	1	PROPOSAL DESIGN	31OCT2018	WY	SZ
	2	UPDATE SIGNAL PIN HOLE FROM 1.02 TO 0.72	15NOV2018	WY	SZ
	A	REVISED	10DEC2019	WY	SZ

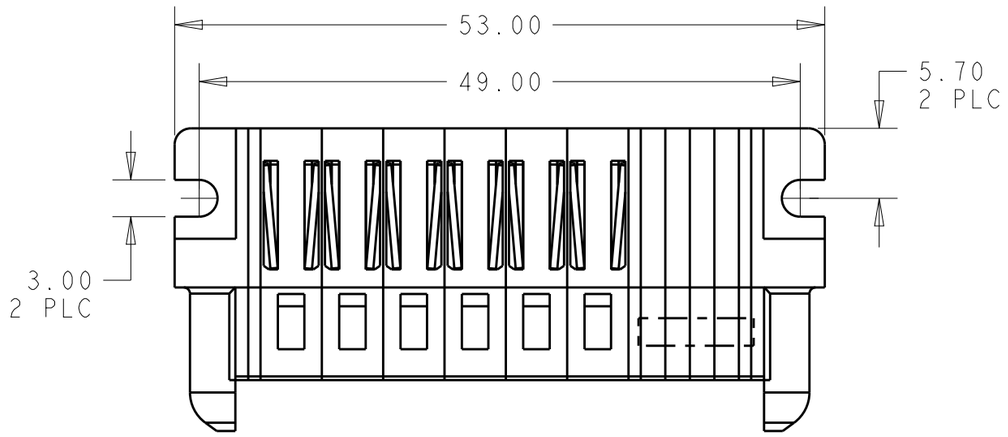

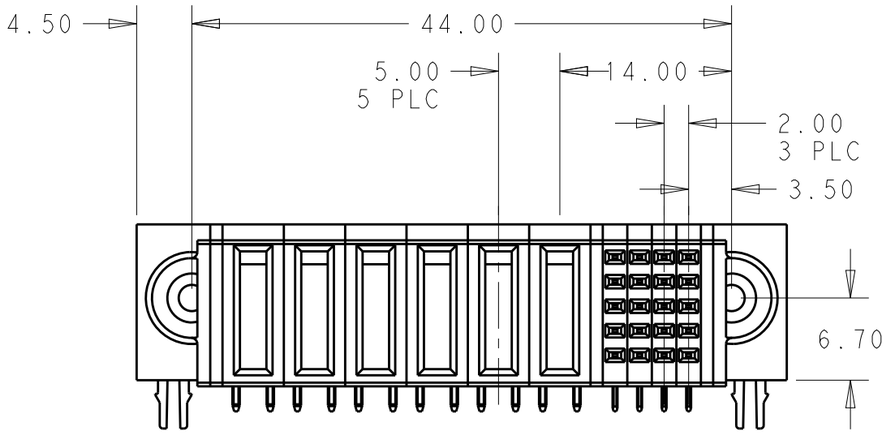

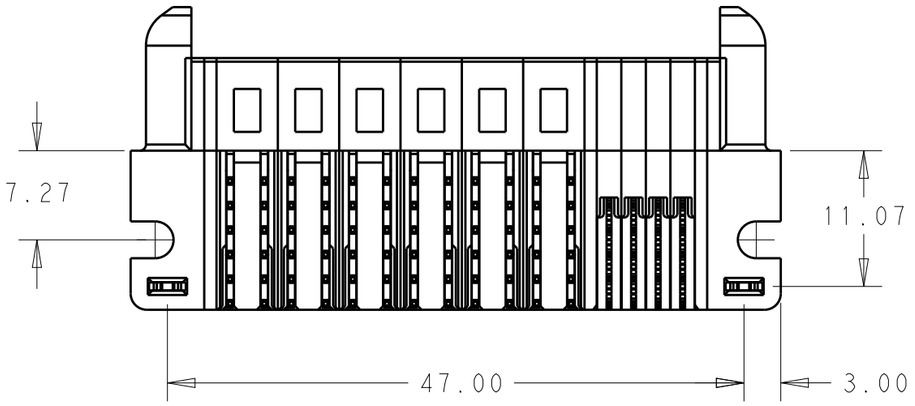

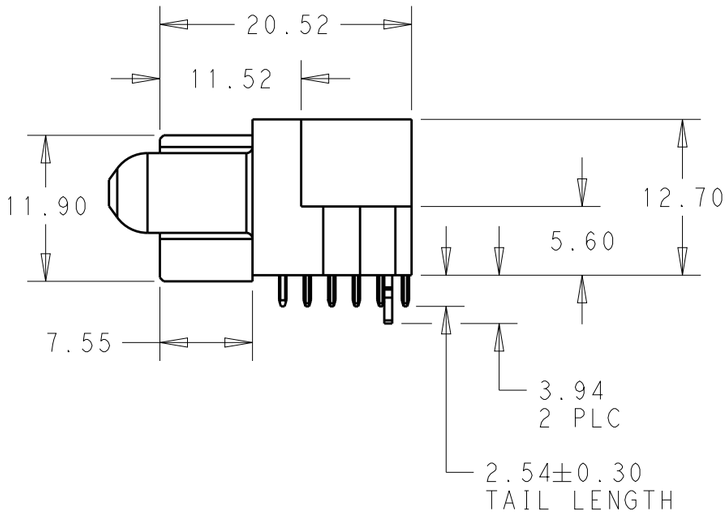

1. "TE", PART NUMBER, AND DATECODE TO BE MARKED IN AREA SHOWN. PARTS UNDER 2.00 LONG MAY BE MARKED ON BOTH SIDES.
2. MATERIAL:
   HOUSING - GLASS FILLED HIGH TEMP THERMO PLASTIC,BLACK, UL94 V-O
   SIGNAL CONTACT - COPPER ALLOY
   POWER CONTACT - HIGH CONDUCTIVITY COPPER ALLOY
3. CONTACT PLATING: NOBLE METAL PLATING ON CONTACT FUNCTIONAL AREA OF POWER AND SIGNAL CONTACTS.
4. MECHANICAL CONNECTOR KEEP OUT ZONE.
5. DATUM AND BASIC DIMENSIONS ESTABLISHED BY CUSTOMER.
6. PCB - HOLE DIAMETERS ARE FINISHED HOLE SIZE.
7. PCB - .0453±.0010 DRILLLED HOLES PLATED WITH .0003 MIN Sn OVER .001 TO .003 Cu PLATING TO ACHIEVE A .040 ±.003 HOLE.

20S + 6P	2334571-1
DESCRIPTION	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: mm

TOLERANCES UNLESS OTHERWISE SPECIFIED:
0 PLC ±-
1 PLC ±-
2 PLC ±0.15
3 PLC ±0.05
4 PLC ±-
ANGLES ±-

MATERIAL - 2

FINISH - 3

DWN	WY	31OCT2018
CHK	WY	31OCT2018
APVD	SZ	31OCT2018
PRODUCT SPEC	-	
APPLICATION SPEC	-	
WEIGHT	-	

TE Connectivity

NAME RIGHT ANGLE RECEPTACLE, SOLDER MULTI-BEAM PLUS

SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A3	00779	C-2334571-1	-


CUSTOMER DRAWING | SCALE 1:1 | SHEET 1 OF 2 | REV A

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION 20
© COPYRIGHT 20 BY - ALL RIGHTS RESERVED.

REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
		SEE SHEET 1			

PART NUMBER	ROWS		POWER P6		P5		P4		P3		P2		P1		4	3	2	1	
2334571-1	E		RN	RM	RN	RM	RN	RM	RN	RM	RN	RM	RN	RM	V5	V5	V5	V5	
	D														V4	V4	V4	V4	
	C														V3	V3	V3	V3	
	B														V2	V2	V2	V2	
	A	HD													V1	V1	V1	V1	HD
20S+6P																			

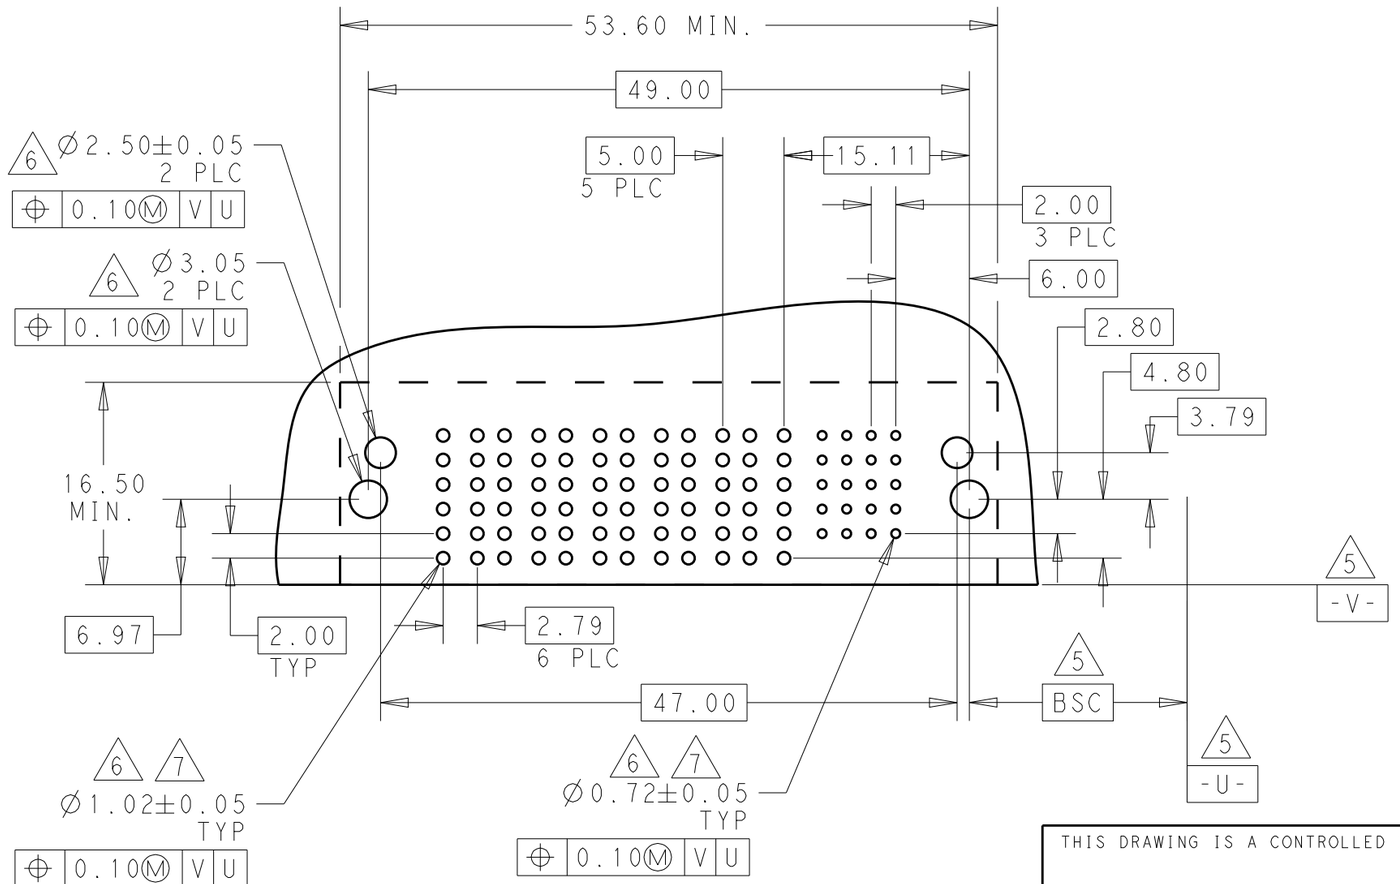

RECOMMENDED PCB LAYOUT

STD SOLDER TYPE SIGNAL CONTACT,R/A,ROW E	V5
STD SOLDER TYPE SIGNAL CONTACT,R/A,ROW D	V4
STD SOLDER TYPE SIGNAL CONTACT,R/A,ROW C	V3
STD SOLDER TYPE SIGNAL CONTACT,R/A,ROW B	V2
STD SOLDER TYPE SIGNAL CONTACT,R/A,ROW A	V1
STD SOLDER POWER CONTACT,RIGHT	RN
STD SOLDER POWER CONTACT,LEFT	RM
HOUSING	HOUSING
HOLD DOWN, MULTI-BEAM	HD
DESCRIPTION	IDENTIFIER

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: mm

TOLERANCES UNLESS OTHERWISE SPECIFIED:

0 PLC	±-
1 PLC	±-
2 PLC	±0.15
3 PLC	±0.05
4 PLC	±-
ANGLES	±-

MATERIAL - 2

FINISH - 3

DWN	WY	31OCT2018
CHK	WY	31OCT2018
APVD	SZ	31OCT2018

PRODUCT SPEC -

APPLICATION SPEC -

WEIGHT -

TE Connectivity

NAME RIGHT ANGLE RECEPTACLE, SOLDER MULTI-BEAM PLUS

SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A3	00779	C-2334571-1	-

CUSTOMER DRAWING | SCALE 1:1 | SHEET 2 OF 2 | REV A

1470-19 (3/13)