



LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
H	—		A	WO 00/7012	20-07-09	—	VS
			B	SR10-0250-02	24-05-02	—	BC
			B1	ECR-09-015706	24-11-09	AEG MKO	

D

C

B



A

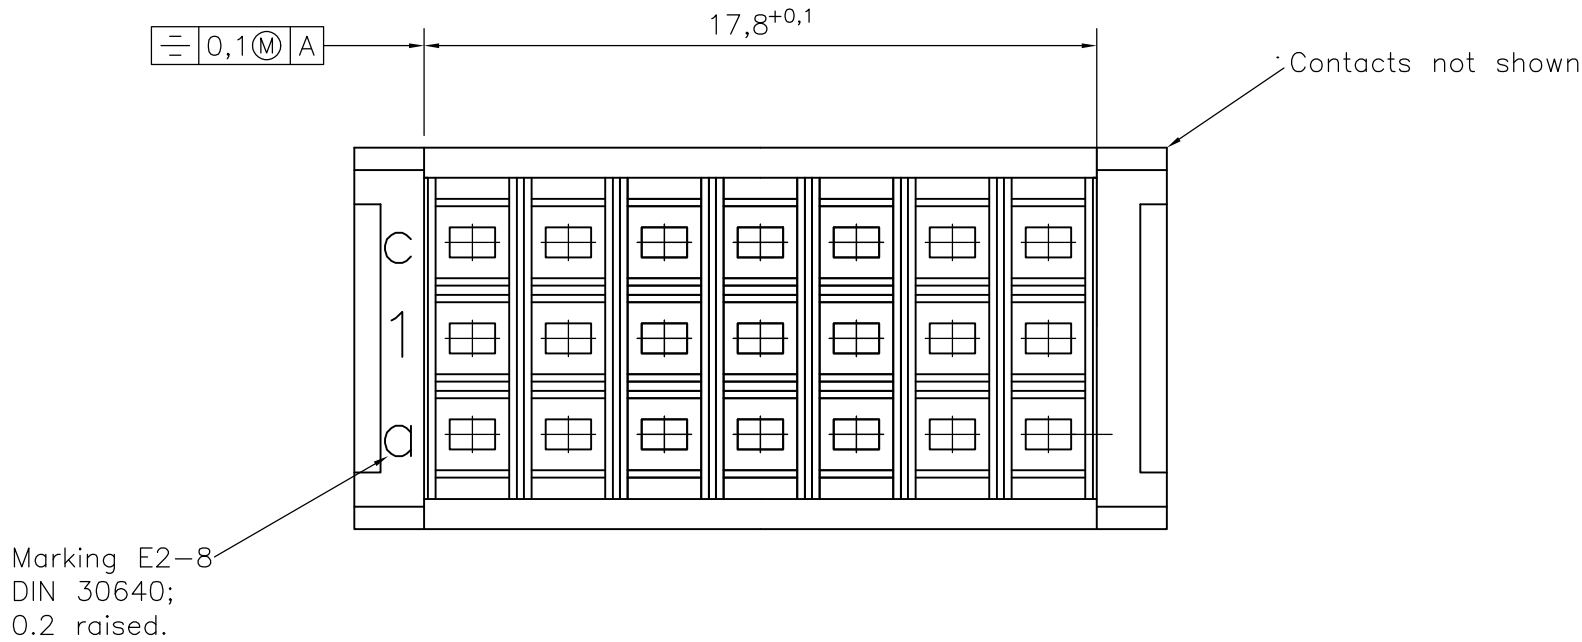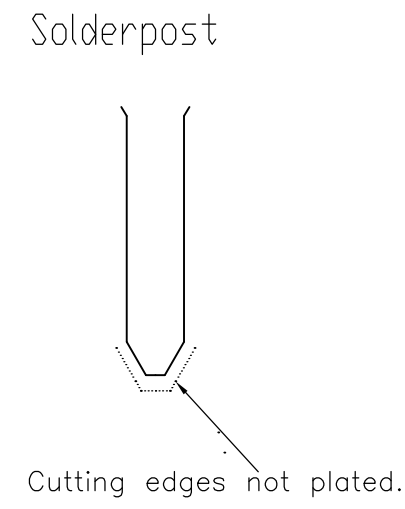

Loading Pattern (21 contacts)

	1	2	3	4	5	6	7
Row a	+	+	+	+	+	+	+
Row b	+	+	+	+	+	+	+
Row c	+	+	+	+	+	+	+

+ = contact
o = no contact

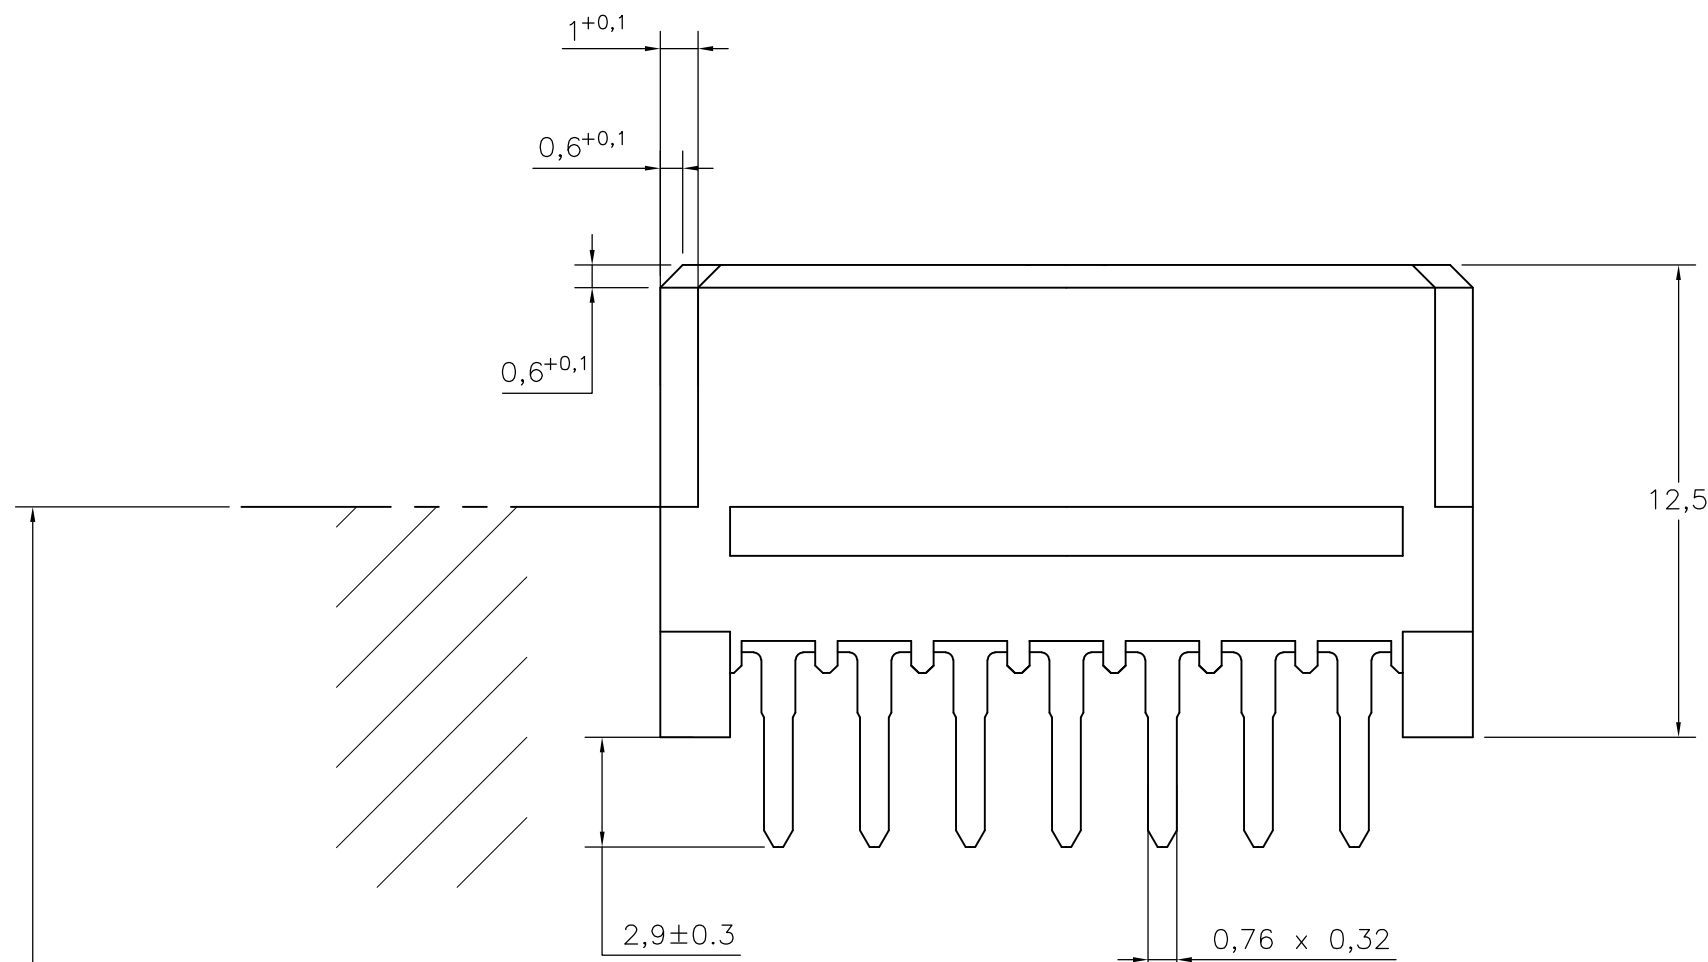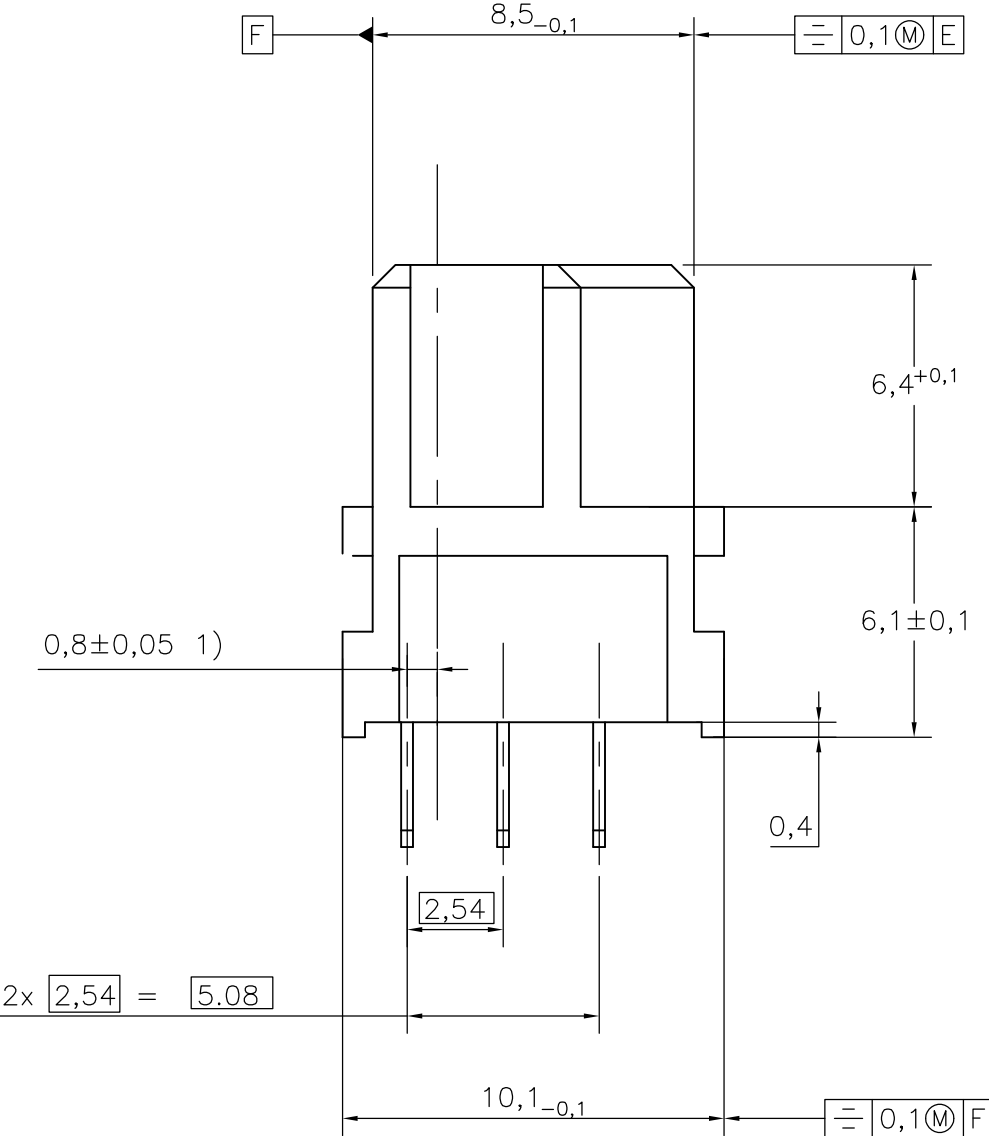

Specifications acc. IEC 603-2. Performance Level 2

Housing : PBTP 30% Glasfilled (UL94-V0)
Pebblegrey similar RAL 7032
Contact material : Copper Alloy
Plating : Contact area : PdNi+Au or Au
Termination area : Sn
with flux-tight coating.

1) Center-displacement between termination- and contact-side.

Active Partnumber. Contact
Tyco Electronics for other
configuration availability

Old Partnumber	TE Part number
V42254-F2299-R7	1393657-5

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN

Cuvelier

10JUN98

CHK

—

—

APVD

PD COM

—

PRODUCT SPEC

—

—

APPLICATION SPEC

—

—

WEIGHT

—

—

CUSTOMER DRAWING

—

—

0 PLC ± -

1 PLC ± -

2 PLC ± -

3 PLC ± -

4 PLC ± -

ANGLES ± -

FINISH —

—

—

—

—

—

—

—

Tyco Electronics

Tyco Electronics Corporation

's-Hertogenbosch, Nederland

NAME

Receptacle Ass'y, Type R, 21 pos.

V42254-F2299-R7-*--26

SIZE

CAGE CODE

DRAWING NO

RESTRICTED TO

A2

00779

C=1393657-5

—

SCALE

5:1;10:1

SHEET

1 OF 1

REV

B1

1393657-5