


THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION



© COPYRIGHT - By -

ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
GP	00						
			B	REVISED PER ECO-14-011808	11AUG2014	AP	SB

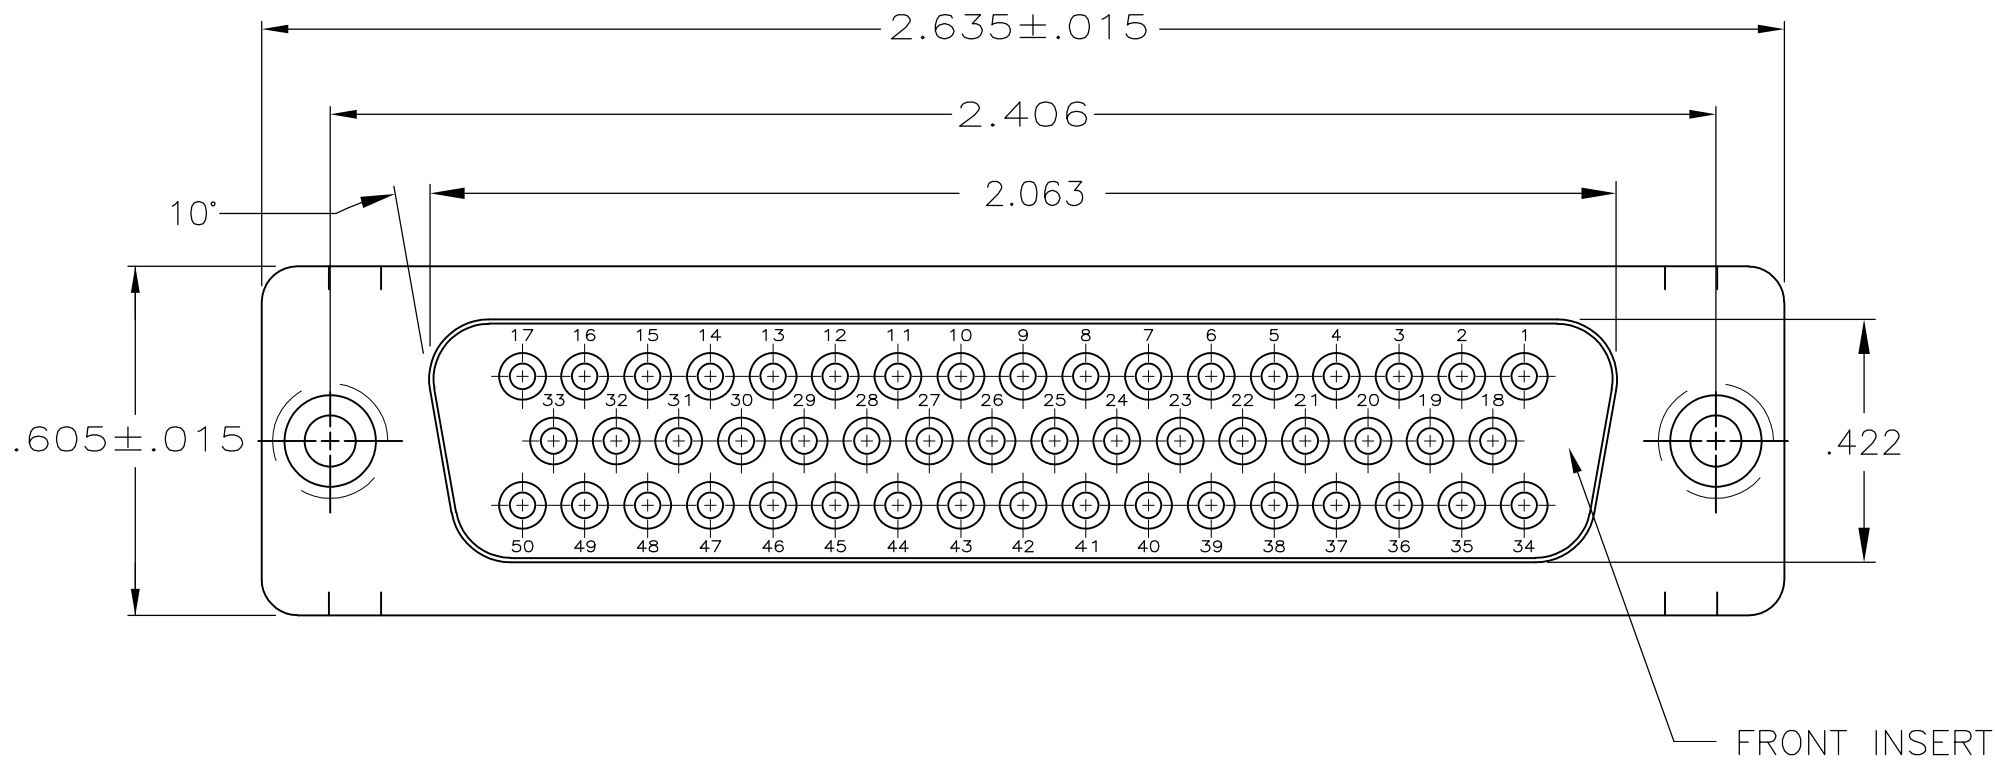

1. CONNECTOR ACCEPTS SIZE 20 DF SOCKET CONTACTS, RETENTION TINES ARE AN INTEGRAL PART OF INSERT.
2. INSERTS: GLASS-FILLED PBT OR GLASS-FILLED NYLON, UL94V-0 RATED. COLOR: BLACK.
- SHELLS & CLINCH NUTS: CARBON STEEL PER ASTM A109.
3. SHELLS: .000200 MIN TIN OVER .000100 MIN COPPER.
4. BLACK INSERT, ZINC PLATED CLEAR CHROMATE COATING.
5. BLUE INSERT, ZINC PLATED YELLOW CHROMATE COATING.

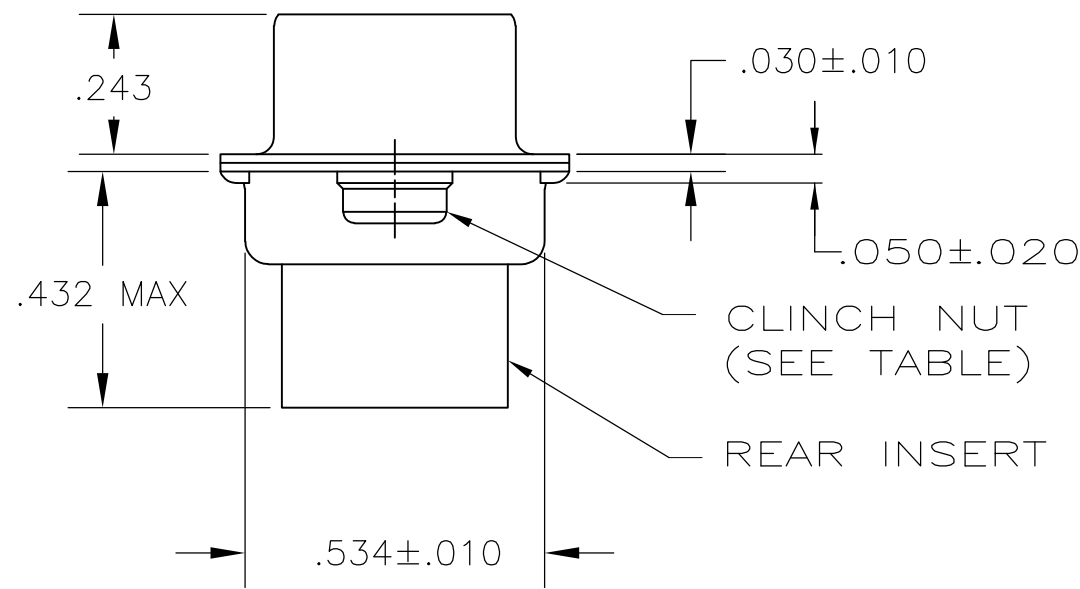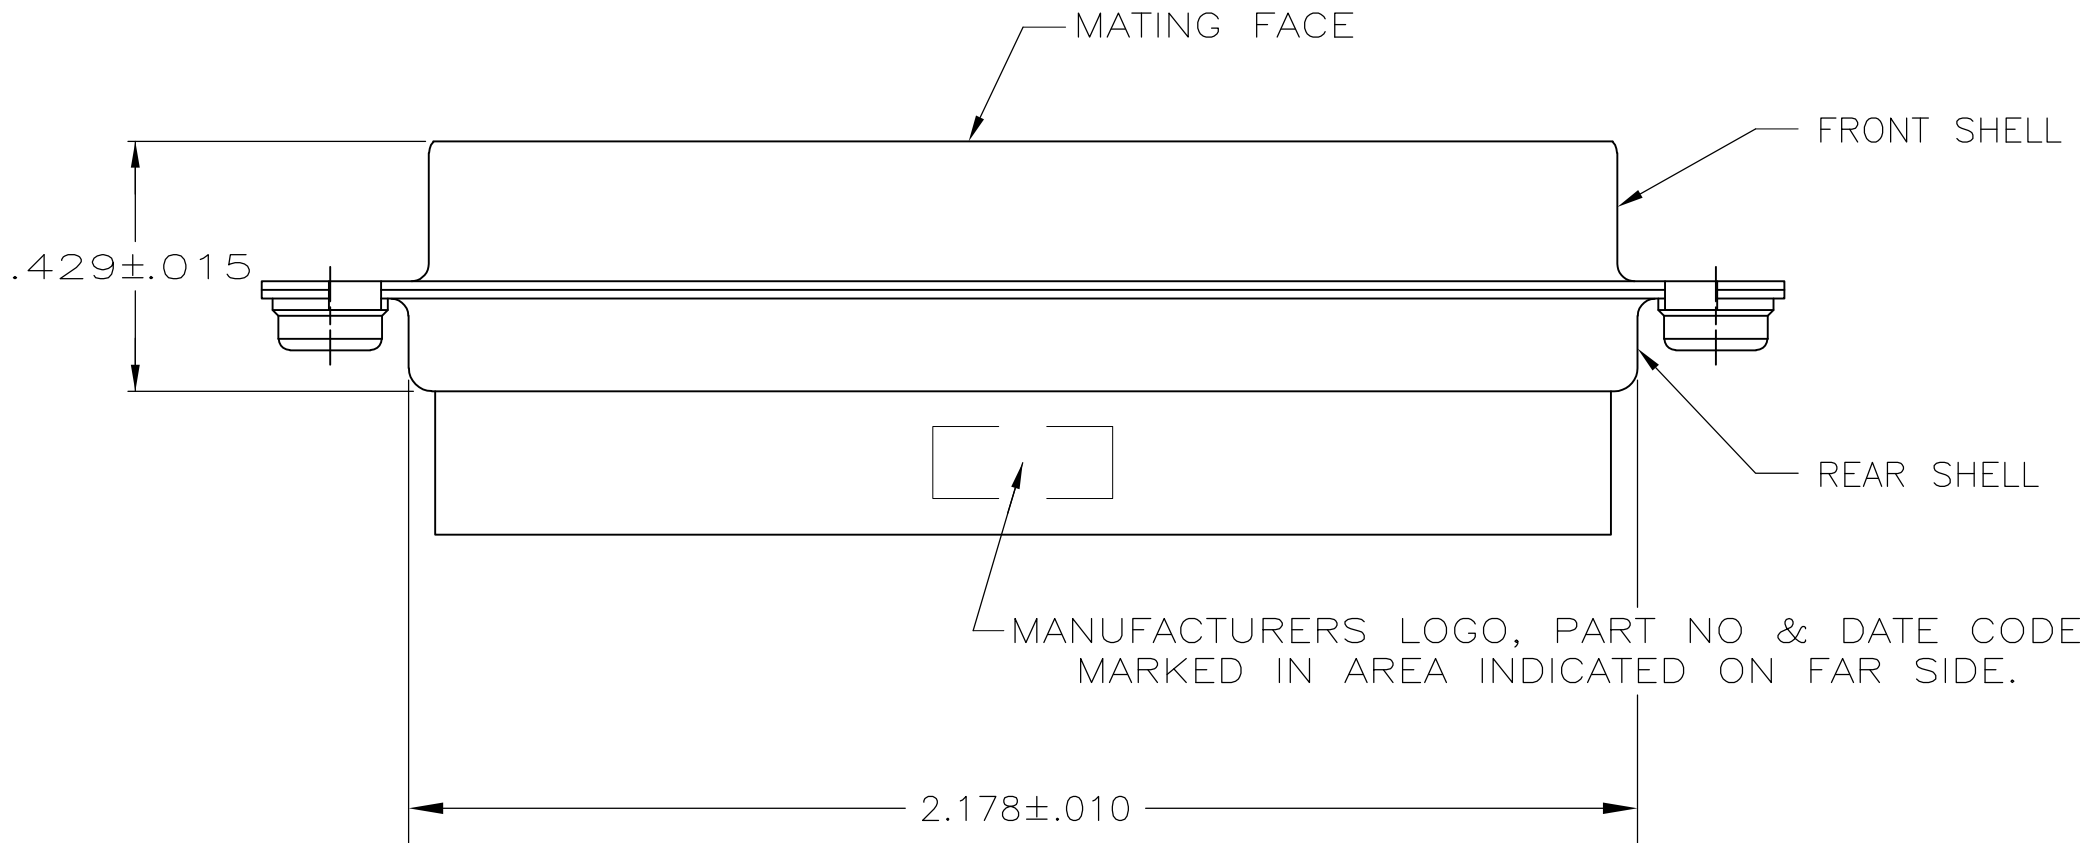

5	M3	5745884-2
4	4-40	5745884-1
CLINCH NUT FINISH	CLINCH NUT THREAD	PART NO

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN L. VARELA - 12-21-04		 TE Connectivity							
		CHK J. GERACE 12-21-04									
DIMENSIONS: INCHES		TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD M. WALMSLEY 12-21-04		NAME					
		0 PLC ± -		PRODUCT SPEC		RECEPTACLE CONNECTOR, SIZE 5, 50 POS., W/ CLINCH NUTS, AMPLIMITE HDP -					
		1 PLC ± -		108-40005							
		2 PLC ± -		APPLICATION SPEC							
		3 PLC ± .005		114-40030							
4 PLC ± -		ANGLES ± -		WEIGHT -		SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO		
MATERIAL		FINISH SHELLS:  CLINCH NUTS: SEE TABLE		A2		00779	C=5745884	-			
		CUSTOMER DRAWING				SCALE	4:1	SHEET	1 of 1	REV	B