


| REVISIONS |     |                           |           |     |      |
|-----------|-----|---------------------------|-----------|-----|------|
| P         | LTR | DESCRIPTION               | DATE      | DWN | APVD |
|           | B1  | REVISED PER ECO-15-001494 | 04FEB2015 | AP  | DD   |
|           | B2  | REVISED PER ECN-24-252171 | 01MAR2024 | AP  | RS   |
|           |     |                           |           |     |      |
|           |     |                           |           |     |      |

D


C

B

A

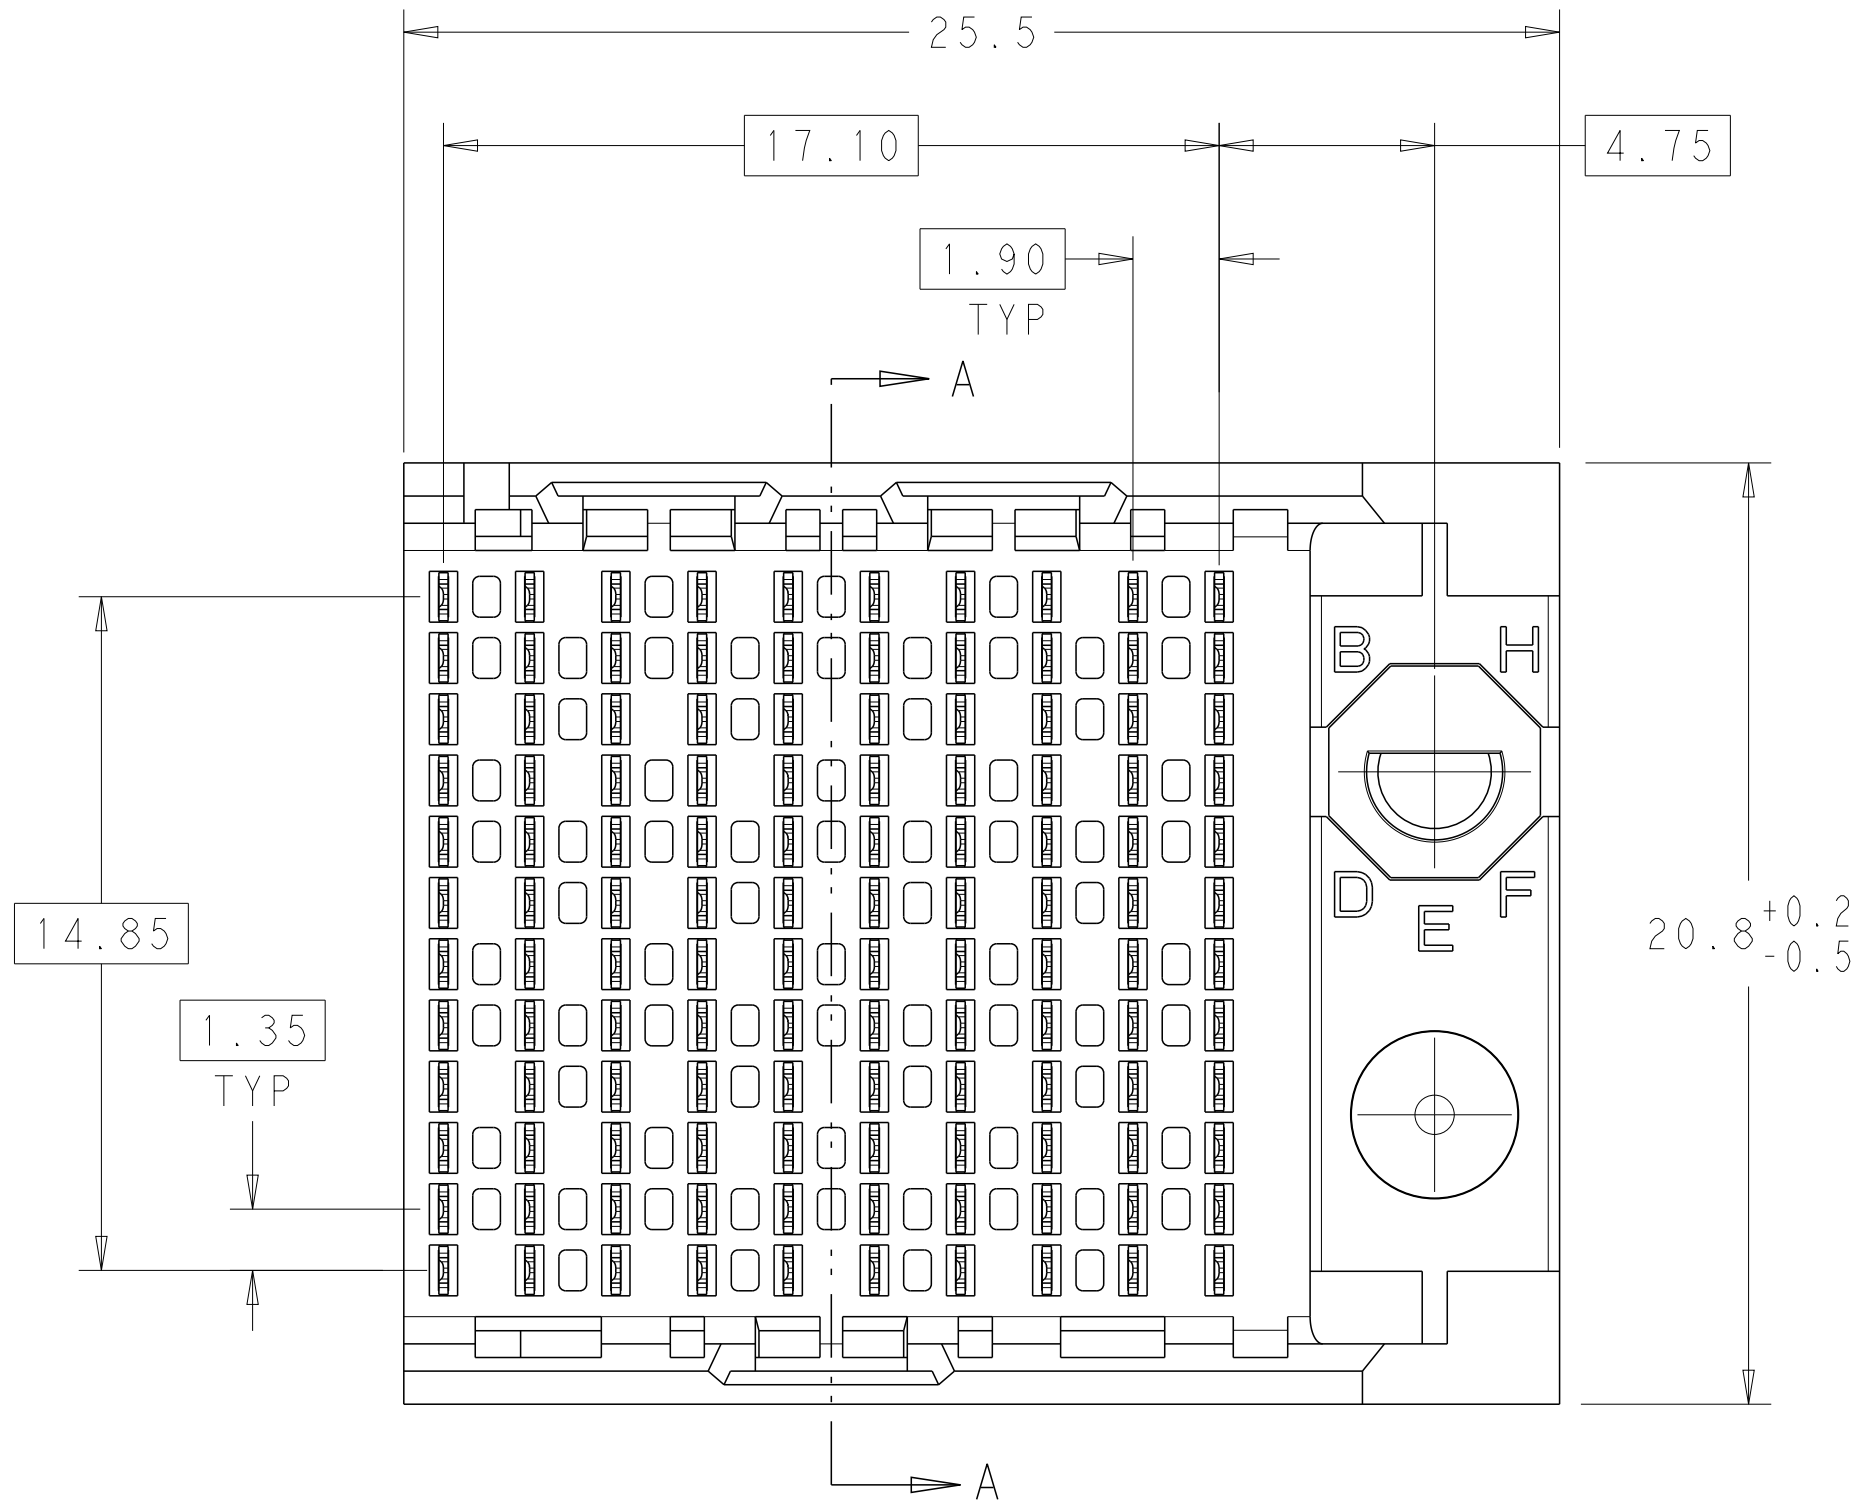

NOTCH DESIGNATES ROW A

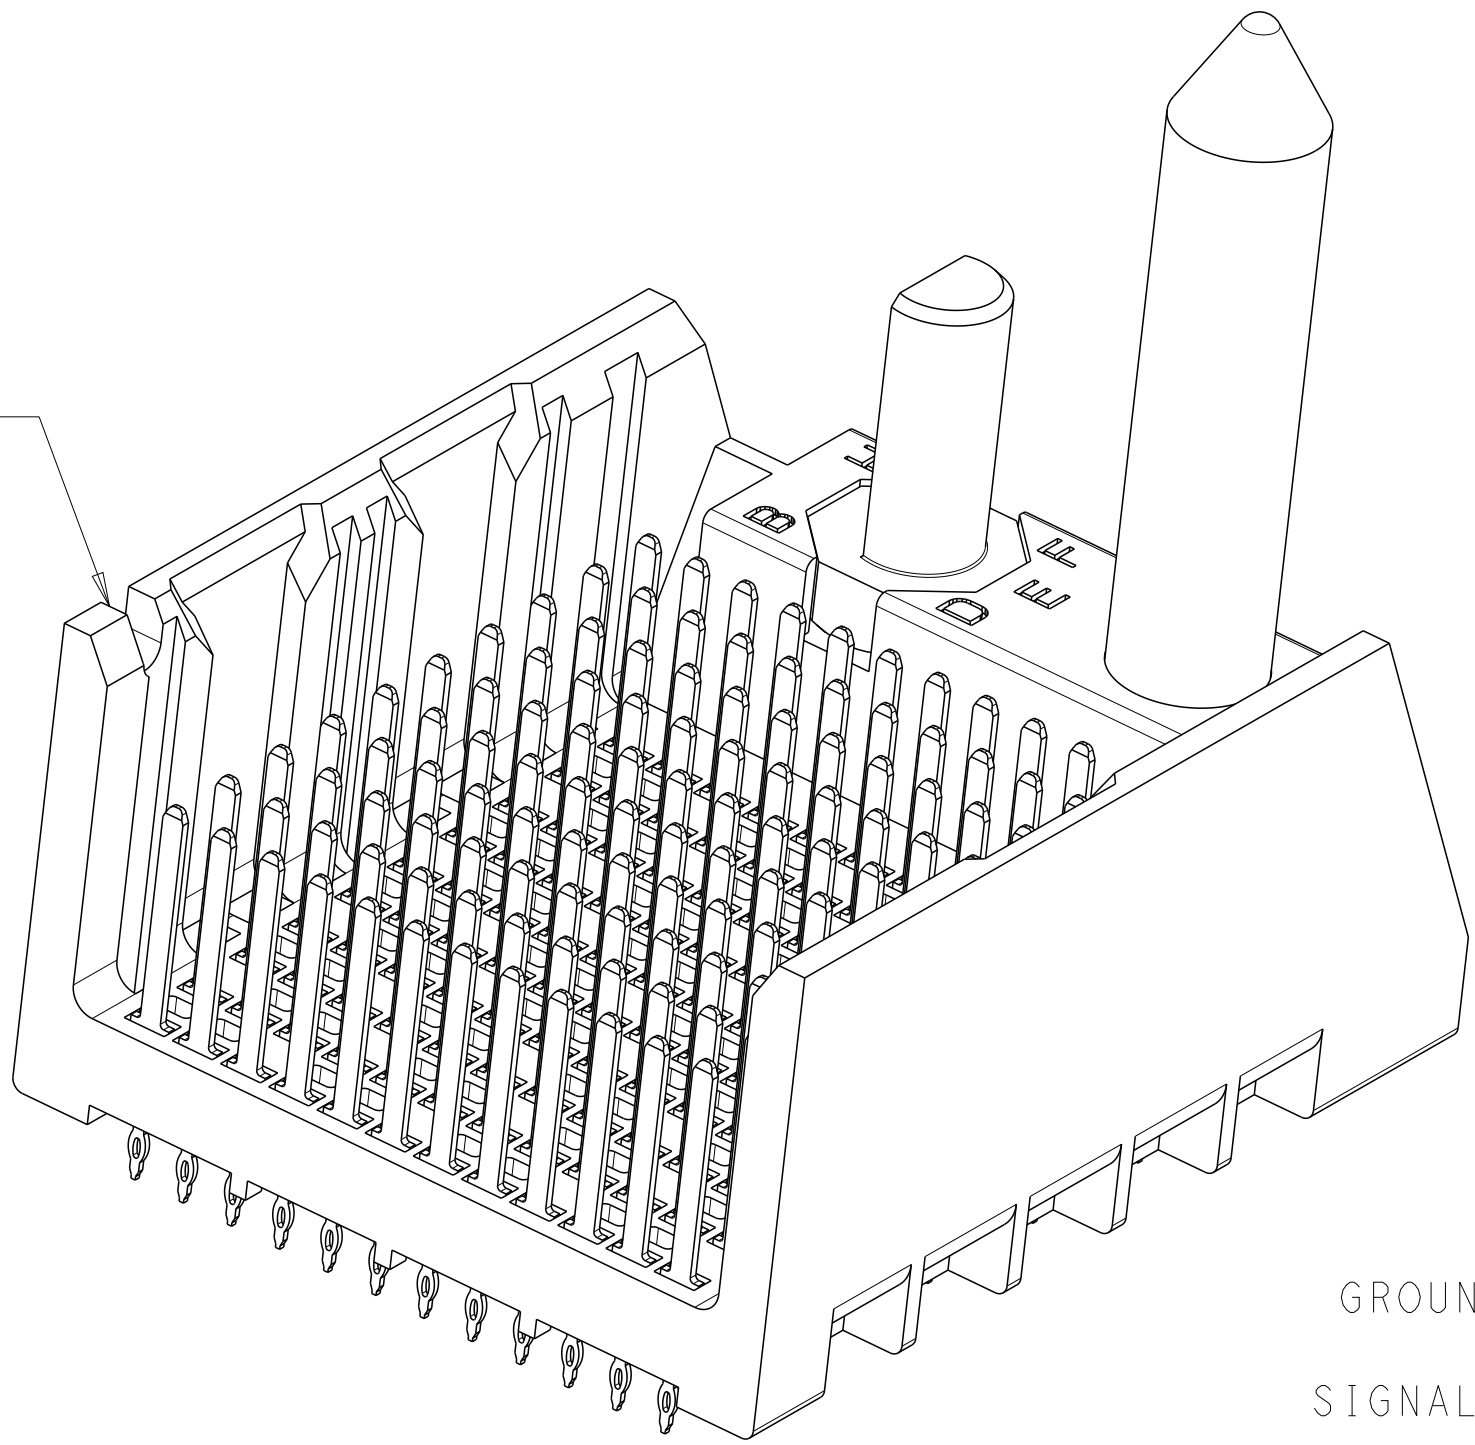


1 MATERIAL:  
HOUSING: LCP, GLASS FILLED, UL94V-0.  
TERMINALS: HIGH PERFORMANCE COPPER ALLOY.

2 FINISH:  
30μ" MIN GOLD IN CONTACT AREA. SELECTIVE TIN  
ON PCB TAILS, NICKEL OVERALL.



3. SCREWS PACKAGED IN END OF PACKAGING TUBE.

4 FOR GROUNDED GUIDE PIN USE Ø3.56±0.08 PTH,  
Ø3.66 DRILL, AND Ø6.5 PAD.

5. KEYING PIN SHOWN IN POSITION A, SEE KEYING CHART  
ON SHEET 2 FOR OTHER POSITIONS.

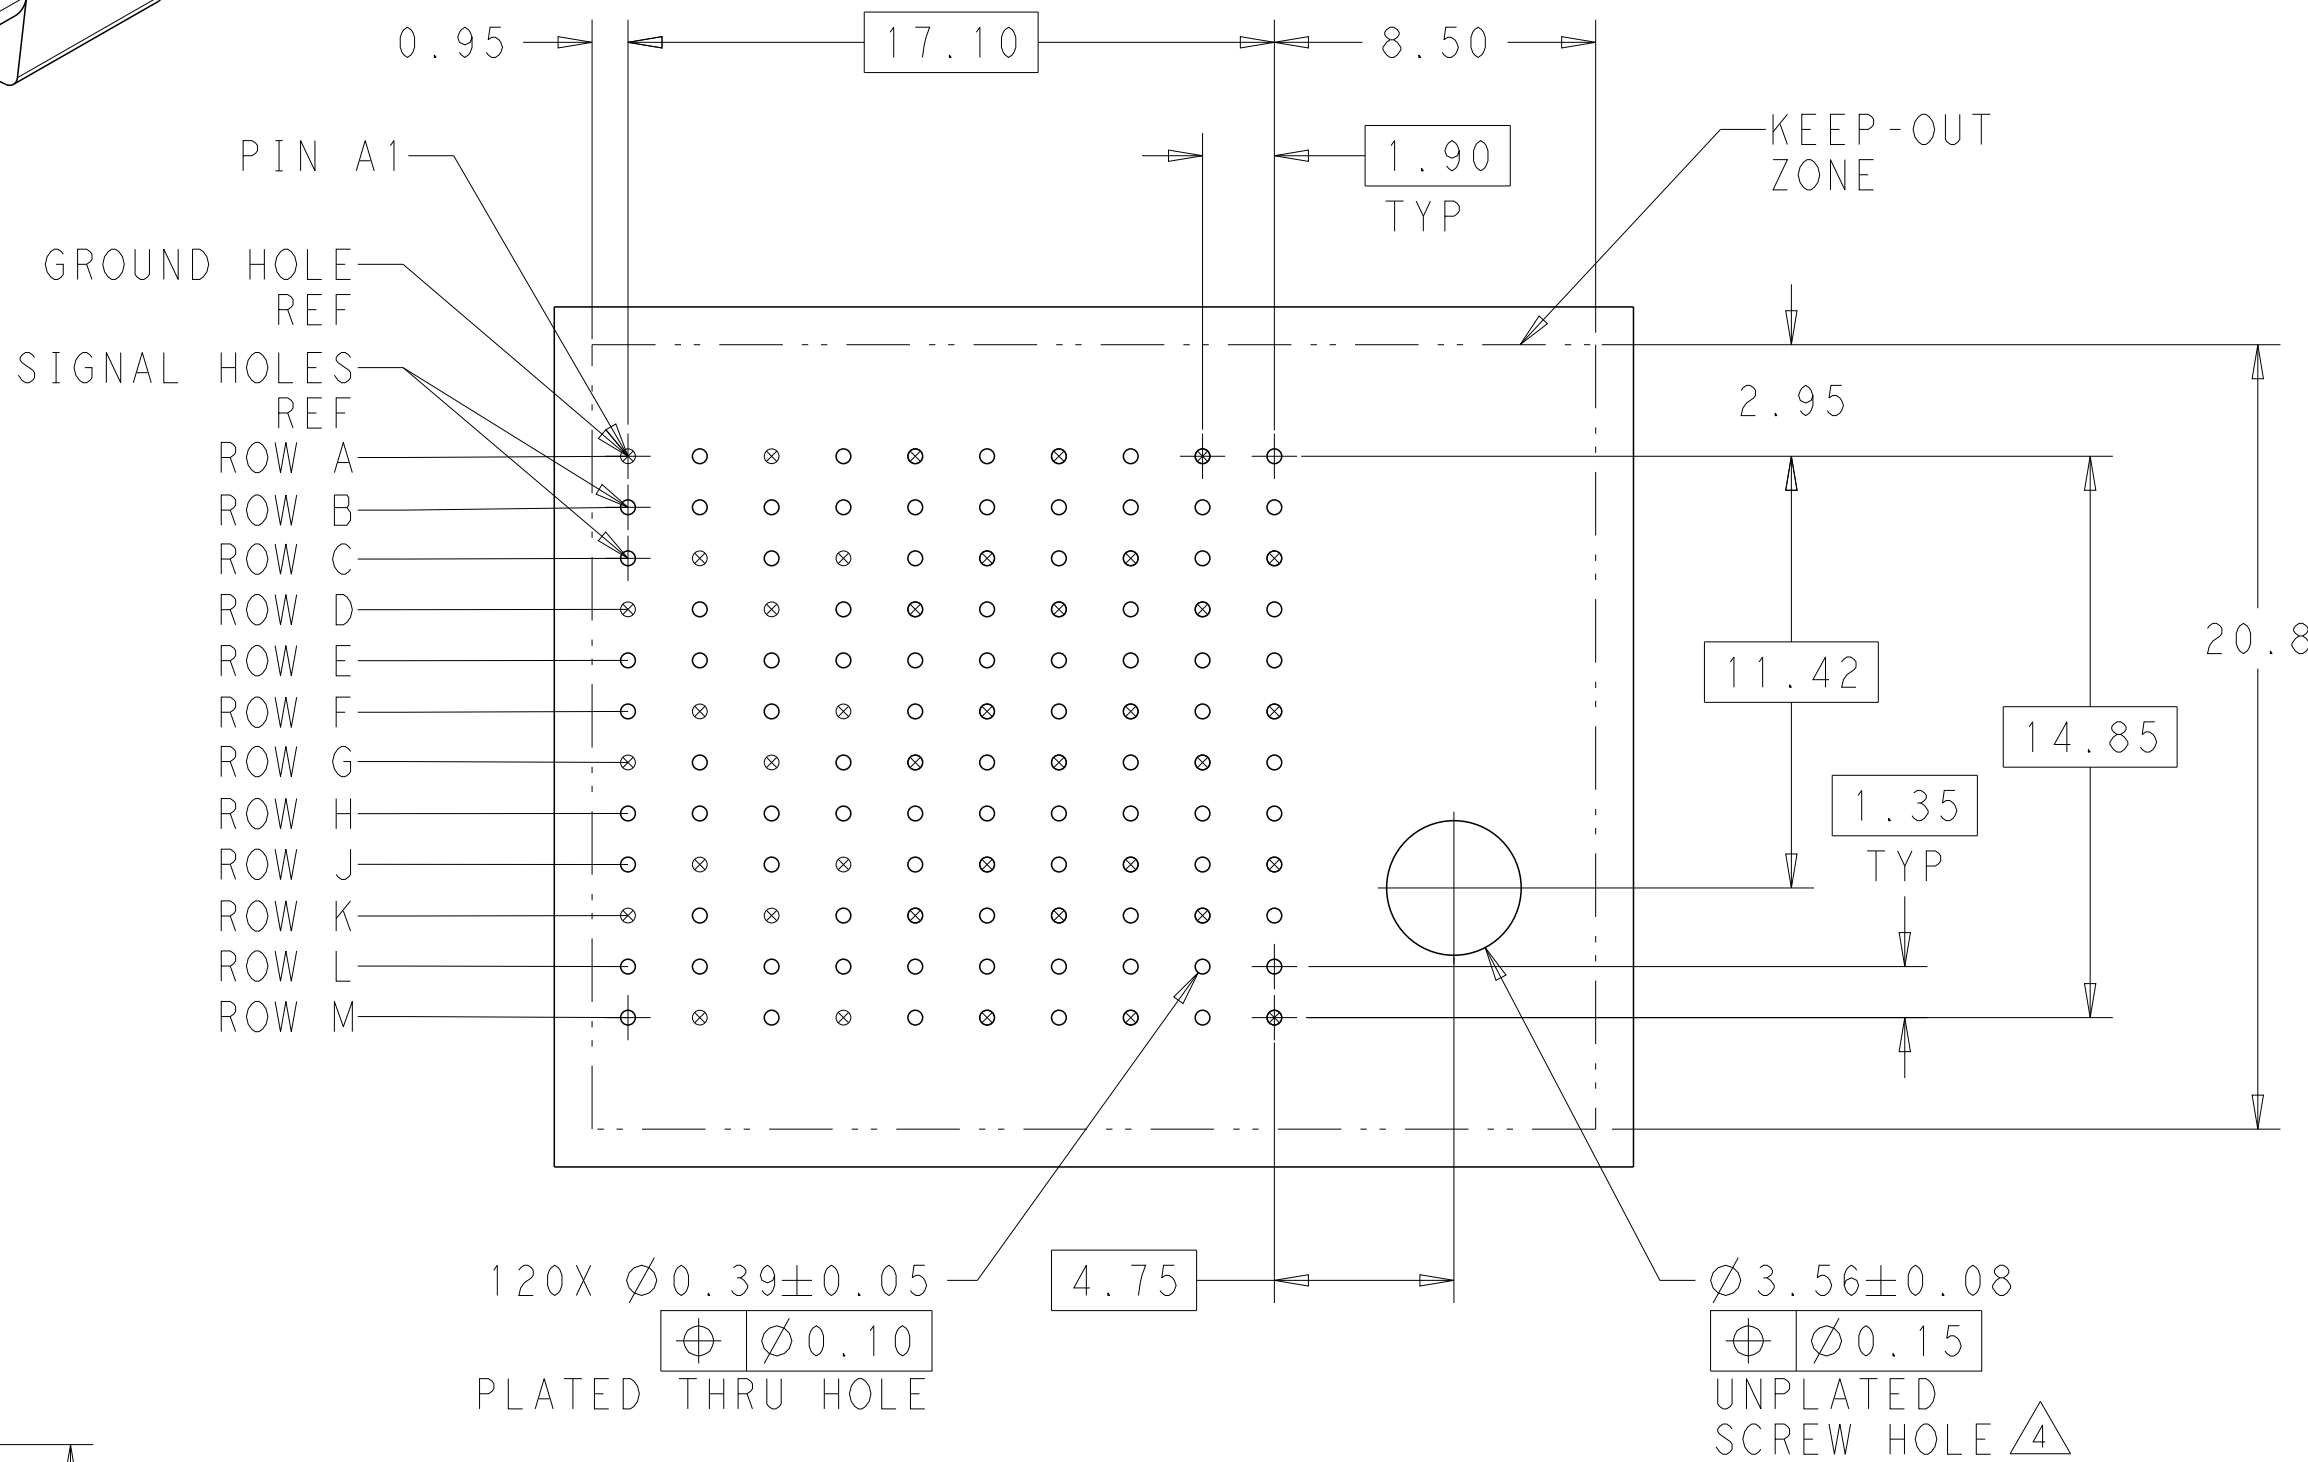


RIGHT GUIDED  
BACKPLANE HOLE PATTERN  
(CONNECTOR SIDE)

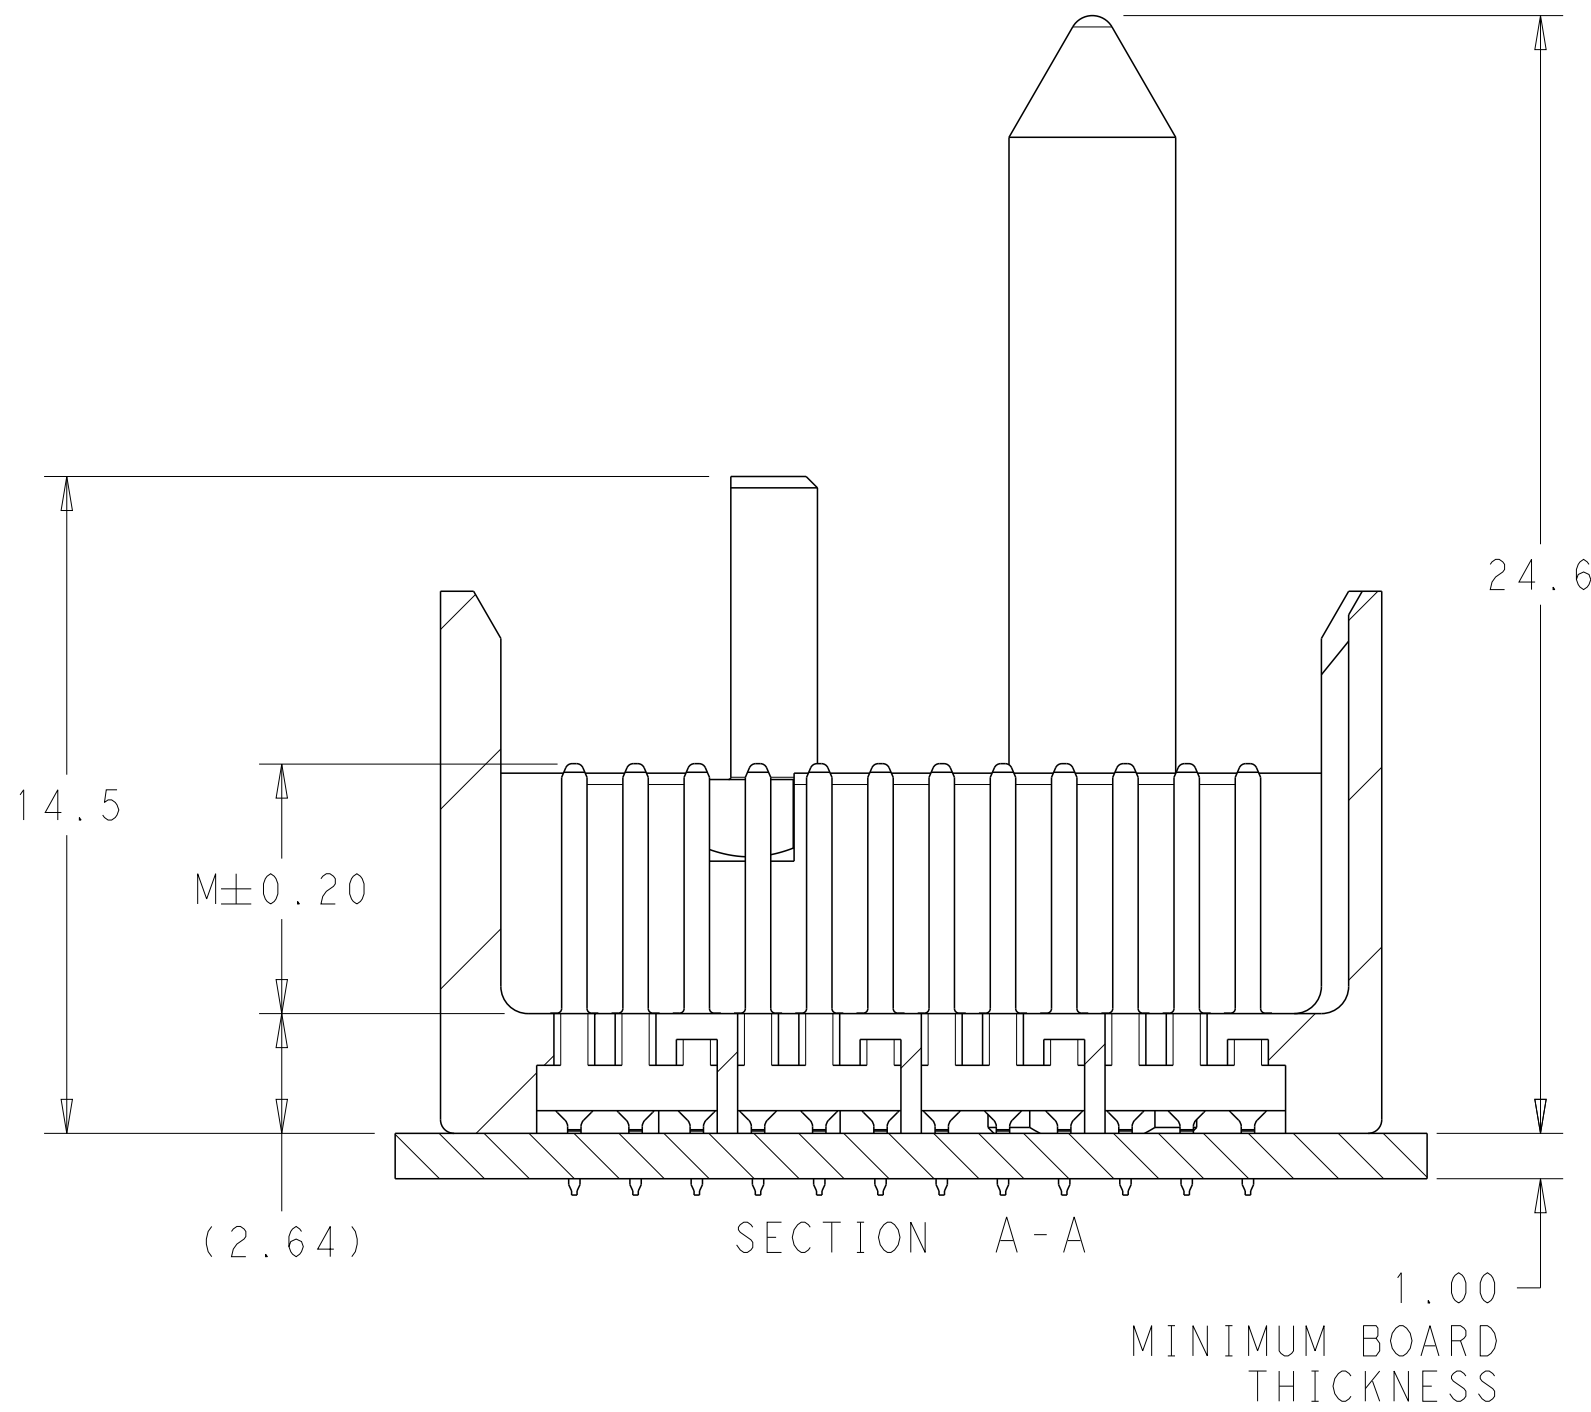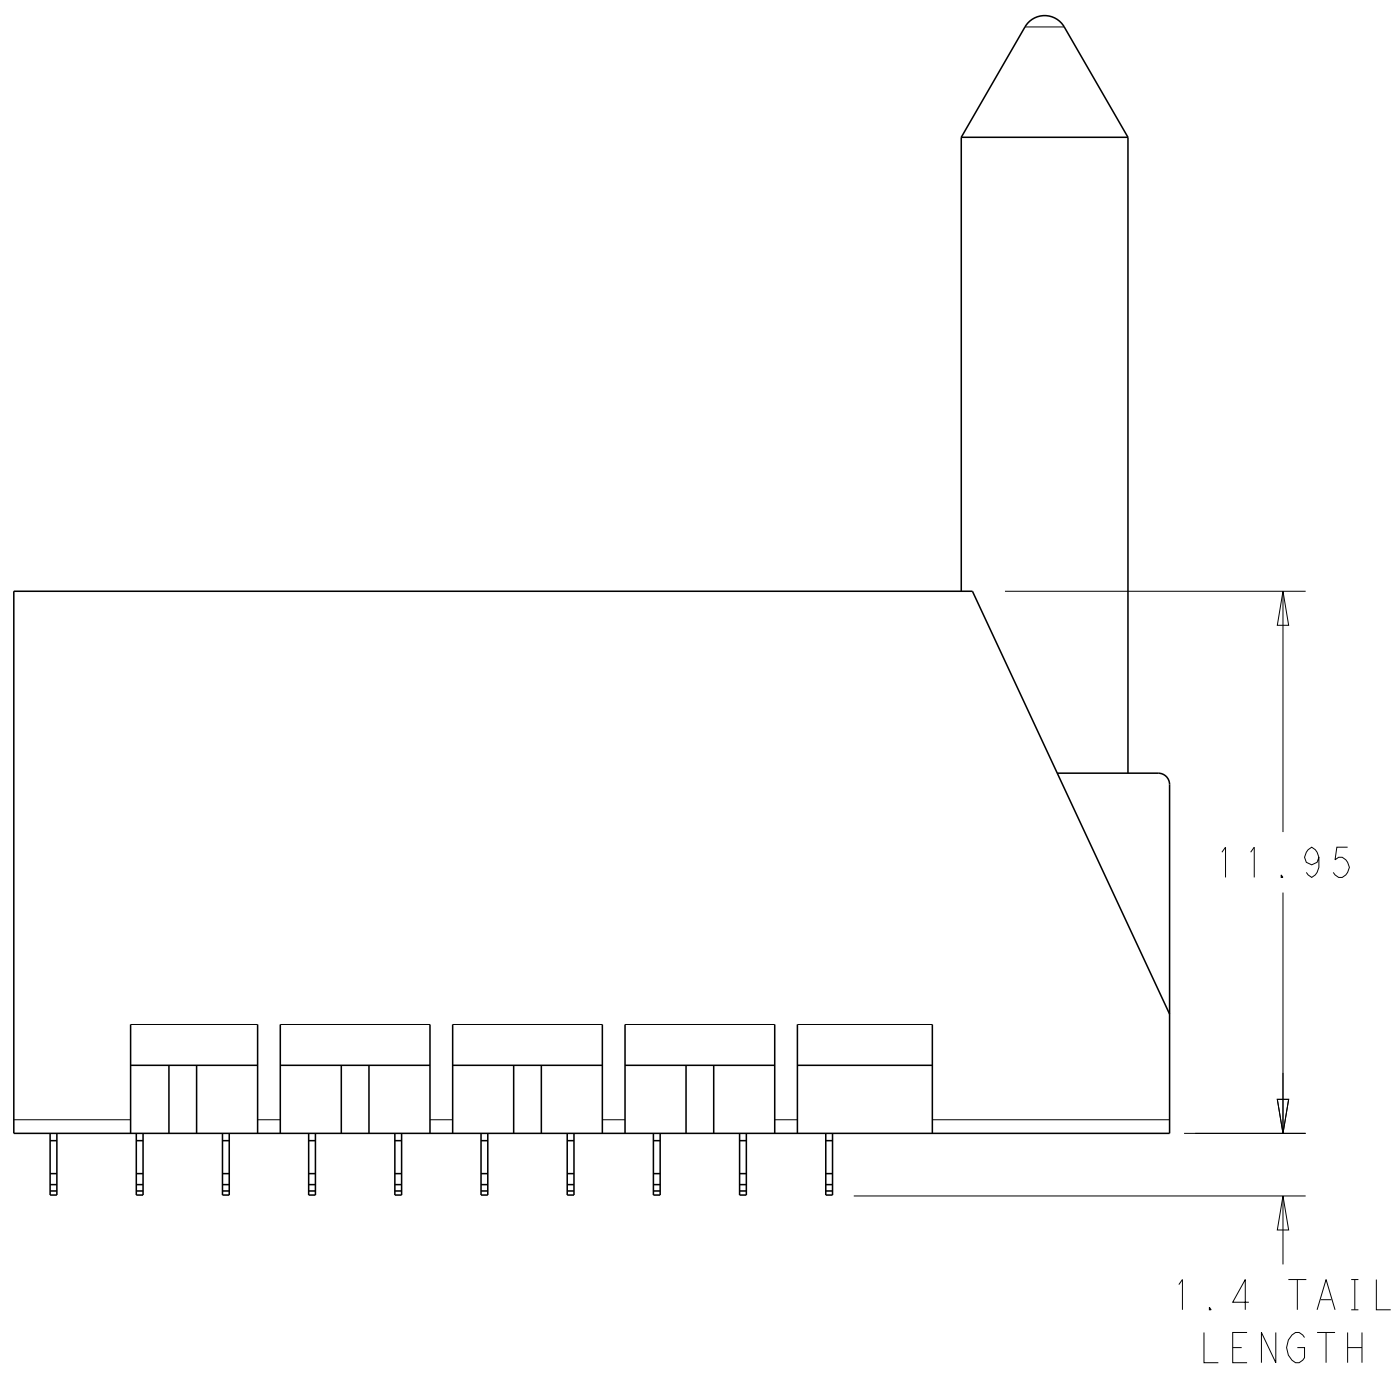


|                                                                                                   |           |                     |         |                                                                                                       |                     |                         |                    |
|---------------------------------------------------------------------------------------------------|-----------|---------------------|---------|-------------------------------------------------------------------------------------------------------|---------------------|-------------------------|--------------------|
| THIS DRAWING IS A CONTROLLED DOCUMENT.                                                            |           | DWN<br>J. K. SHOBER | 26DEC11 |  TE Connectivity |                     |                         |                    |
| DIMENSIONS:                                                                                       |           | CHK<br>J. EABY      | 26DEC11 |                                                                                                       |                     |                         |                    |
| mm                                                                                                |           | APVD<br>J. EABY     | 26DEC11 |                                                                                                       |                     |                         |                    |
|                                                                                                   |           | PRODUCT SPEC        |         |                                                                                                       |                     |                         |                    |
|              |           | APPLICATION SPEC    |         | NAME<br>IMPACT, 4 PAIR, 10 COLUMN, HEADER<br>RIGHT GUIDED, OPEN END WALL<br>SIGNAL MODULE, 0.39 PTH   |                     |                         |                    |
| 0 PLC ±<br>1 PLC ±0.25<br>2 PLC ±0.13<br>3 PLC ±<br>4 PLC ±<br>ANGLES ±                           |           |                     |         |                                                                                                       |                     |                         |                    |
| FINISH                                                                                            |           | WEIGHT              | -       |                                                                                                       |                     |                         |                    |
| MATERIAL<br> | SEE TABLE | CUSTOMER DRAWING    |         | SIZE<br>A1                                                                                            | CAGE CODE<br>100779 | DRAWING NO<br>G=2007813 | RESTRICTED TO<br>- |
|                                                                                                   |           |                     |         | SCALE<br>6:1                                                                                          | SHEET<br>1          | OF<br>2                 | REV<br>B2          |

| REVISIONS |     |             |      |     |      |
|-----------|-----|-------------|------|-----|------|
| P         | LYR | DESCRIPTION | DATE | DWN | APVD |
|           | -   | SEE SHEET 1 | -    | -   | -    |
|           |     |             |      |     |      |
|           |     |             |      |     |      |
|           |     |             |      |     |      |


KEY POSITION CHART




NONE




A




E




B




F




C



G




D



H

|                                                                                     |              |       |             |          |
|-------------------------------------------------------------------------------------|--------------|-------|-------------|----------|
|  | H            | 5.5   | 8-2007813-3 | OBSOLETE |
|  | H            | 4.9   | 8-2007813-2 |          |
|  | H            | 4.5   | 8-2007813-1 |          |
|  | G            | 5.5   | 7-2007813-3 |          |
|  | G            | 4.9   | 7-2007813-2 |          |
|  | G            | 4.5   | 7-2007813-1 |          |
|  | F            | 5.5   | 6-2007813-3 |          |
|  | F            | 4.9   | 6-2007813-2 |          |
|  | F            | 4.5   | 6-2007813-1 |          |
|  | E            | 5.5   | 5-2007813-3 |          |
|  | E            | 4.9   | 5-2007813-2 |          |
|  | E            | 4.5   | 5-2007813-1 |          |
|  | D            | 5.5   | 4-2007813-3 |          |
|  | D            | 4.9   | 4-2007813-2 |          |
|  | D            | 4.5   | 4-2007813-1 |          |
|  | C            | 5.5   | 3-2007813-3 |          |
|  | C            | 4.9   | 3-2007813-2 |          |
|  | C            | 4.5   | 3-2007813-1 |          |
|  | B            | 5.5   | 2-2007813-3 |          |
|  | B            | 4.9   | 2-2007813-2 |          |
|  | B            | 4.5   | 2-2007813-1 |          |
|  | A            | 5.5   | 1-2007813-3 |          |
|  | A            | 4.9   | 1-2007813-2 |          |
|  | A            | 4.5   | 1-2007813-1 |          |
|  | -            | 5.5   | 2007813-3   |          |
|  | -            | 4.9   | 2007813-2   |          |
|  | -            | 4.5   | 2007813-1   |          |
| FINISH                                                                              | KEY POSITION | DIM M | PART NUMBER |          |

REFER TO WWW.TE.COM  
FOR PRODUCT AVAILABILITY

|                                                                                       |                                                                                   |                              |                                                                                                       |  |
|---------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|------------------------------|-------------------------------------------------------------------------------------------------------|--|
| THIS DRAWING IS A CONTROLLED DOCUMENT.                                                |                                                                                   | DWN<br>J. K. SHOBER 26DECT11 |  TE Connectivity |  |
|                                                                                       |                                                                                   | CHK<br>J. EABY 26DECT11      |                                                                                                       |  |
| DIMENSIONS:                                                                           |                                                                                   | APVD<br>J. EABY 26DECT11     | NAME                                                                                                  |  |
| mm                                                                                    | TOLERANCES UNLESS OTHERWISE SPECIFIED:                                            | PRODUCT SPEC                 | IMPACT, 4 PAIR, 10 COLUMN, HEADER<br>RIGHT GUIDED, OPEN END WALL<br>SIGNAL MODULE, 0.39 PTH           |  |
|  | 0 PLC ±<br>1 PLC ±0.25<br>2 PLC ±0.13<br>3 PLC ±<br>4 PLC ±<br>ANGLES ±<br>FINISH | APPLICATION SPEC             | SIZE CAGE CODE DRAWING NO RESTRICTED TO                                                               |  |
| MATERIAL                                                                              | SEE TABLE                                                                         | WEIGHT                       | A100779C=2007813                                                                                      |  |
| -                                                                                     | -                                                                                 | CUSTOMER DRAWING             | SCALE 5:1 SHEET 2 OF 2 REV B2                                                                         |  |

4805 (3/13)