


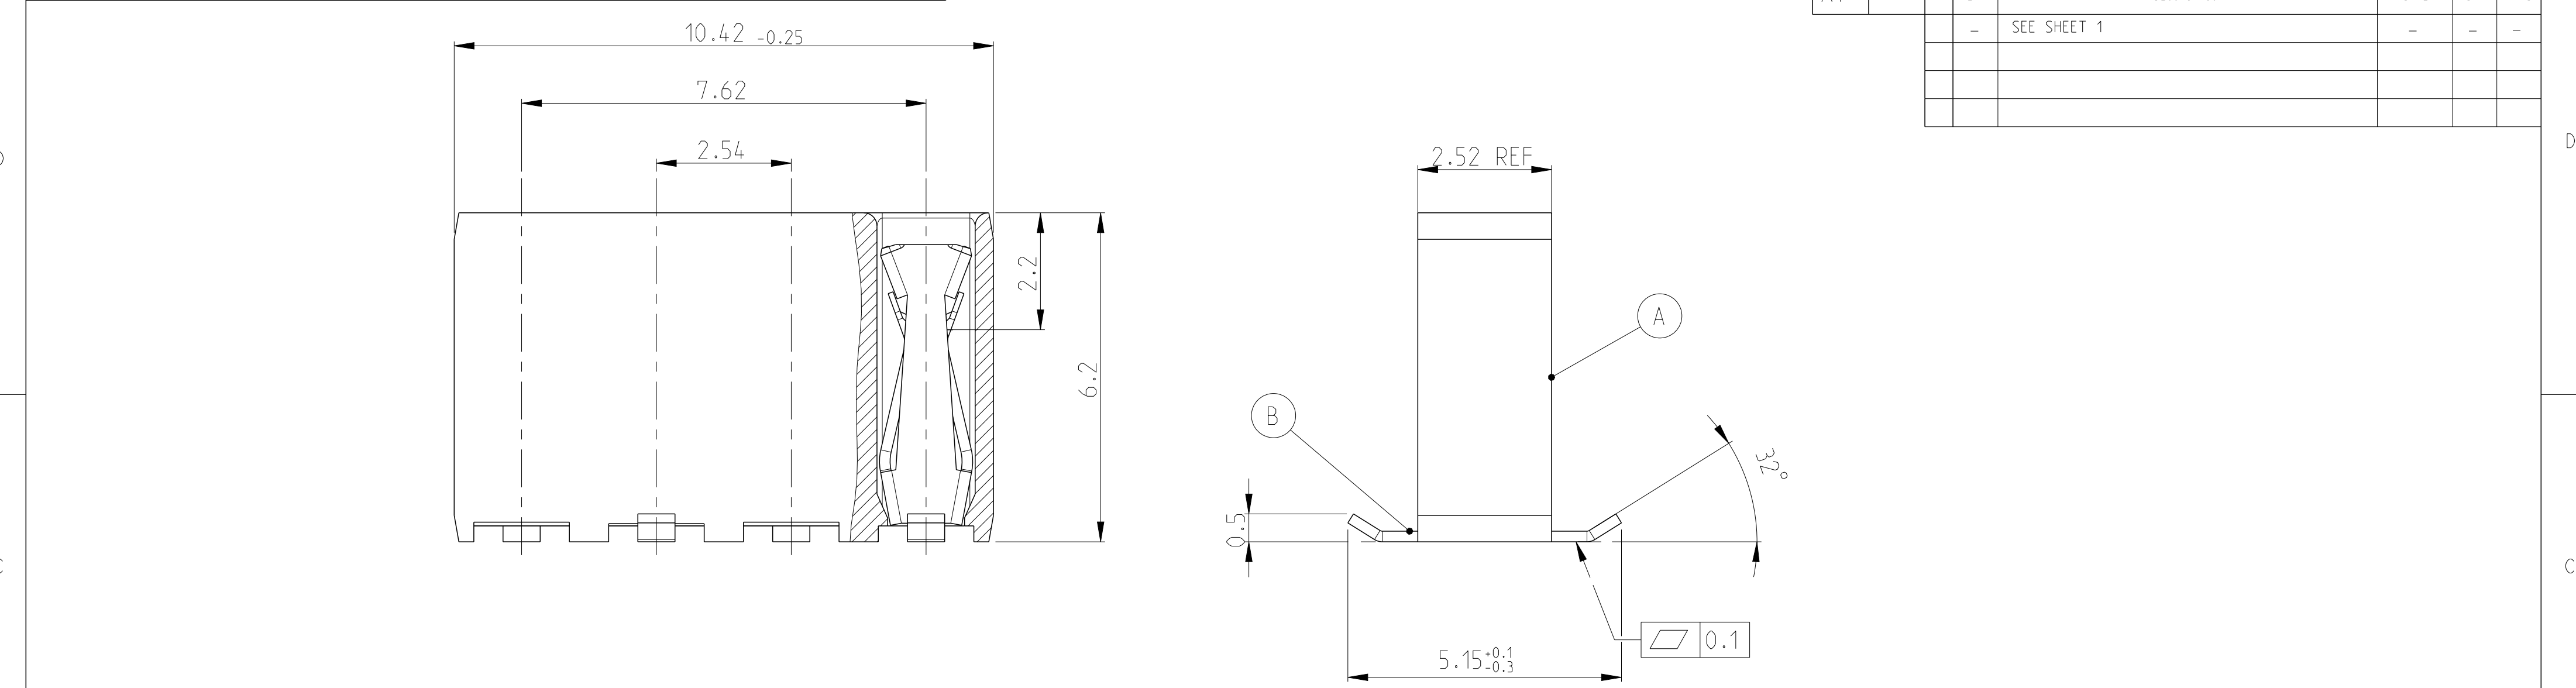

NOTE

CONTACT RANGE: 0.8 μm GOLD OVER 1.3 μm Ni
SOLDERING RANGE: 2.5 μm TIN OVER 1.3 μm Ni

8. CAN BE PLUGGED IN WITH MODU II PINS
Ø0.63 OR □0.63 TOP OR BOTTOM ENTRY

9. ONLY WITH THE BOTTOM ENTRY

HV 100 CONTACT	CuSn		B	THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN G. ACKERMANN 27MAR2007		TE Connectivity			
				DIMENSIONS: mm	TOLERANCES UNLESS OTHERWISE SPECIFIED:	CHK N. GEISTER 27MAR2007		NAME HV100 RECEPTACLE CONNECTOR SINGLE ROW, SMD, PACKED IN BLISTER GOLD VERSION			
					0 PLC ± 1 PLC ± 2 PLC ± 3 PLC ± 4 PLC ± ANGLES ±° FINISH	APVD M. SCHAARSCHMIDT 29MAR2007		SIZE A2	CAGE CODE 100779	DRAWING NO C-1987001	RESTRICTED TO -
				MATERIAL SEE TABLE	SEE TABLE	PRODUCT SPEC 108-19056 APPLICATION SPEC - WEIGHT -		SCALE 5:1 SHEET 2 OF 2 REV E			