
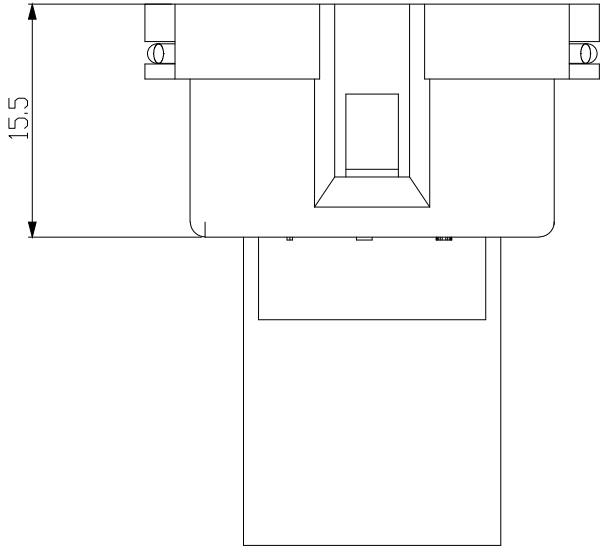
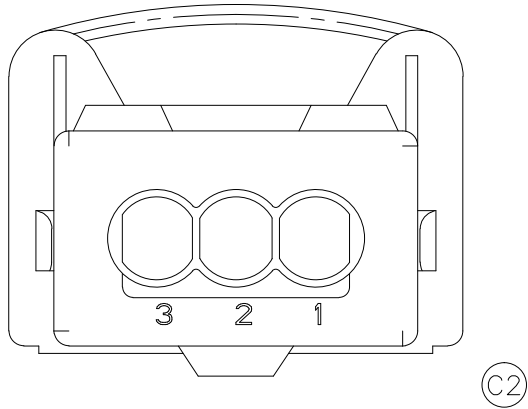
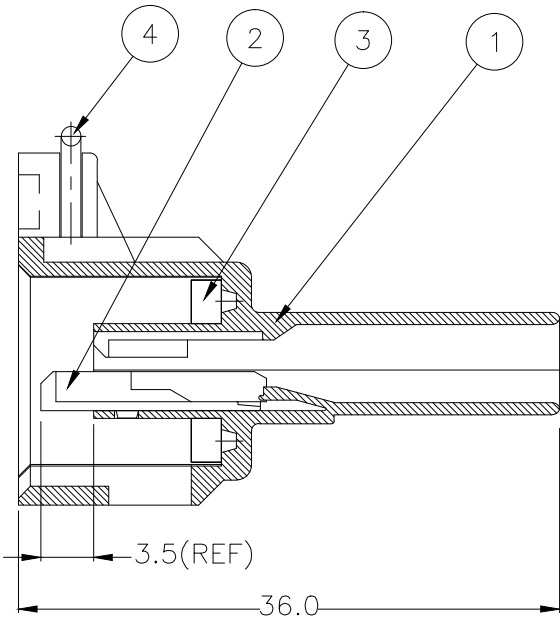


REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	B	REVISED(RD097-043)	04.APR.'97	YD	CS
	C	REVISED(FC00-0085-99)	02.JUL.'99	YD	CS
	C1	REVISED(ECR-07-020197)	24.AUG.'07	YC	JK
	C2	REVISED(ECR-16-000551)	13.JAN.'16	SJ	HG

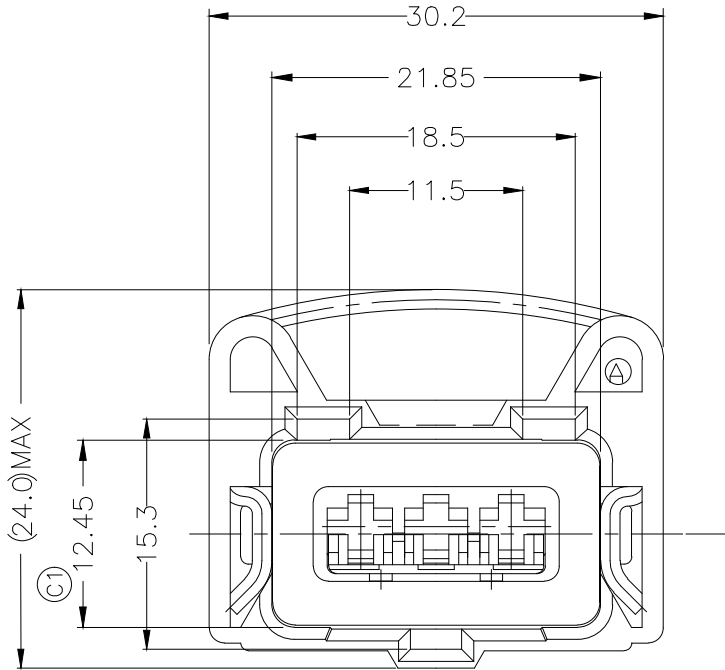

- * NOTES *
1. APPLICABLE CONTACT P/NO: 927770/927766
2. APPLICABLE WIRE SEAL
P/NO: 828904/828905/368064

4		SUS 304	SPRING	85388-1	1	1	1
3	ORANGE	SILICONE	SEAL RUBBER	85384-1	1	1	1
2	YELLOW	PBT	SPACER	85207-1	1	1	1
1	GREEN	PBT 30% GF	JPT 3P HSG FOR STANDARD	C1 85206-3	1		
1	BLUE	PBT 30% GF	JPT 3P HSG FOR STANDARD	C1 85206-2		1	
1	BLACK	PBT 30% GF	JPT 3P HSG FOR STANDARD	C1 85206-1			1
NO	COLOR	MATERIAL	DESCRIPTION	P/NO	REQUIRED Q'TY		

85205-3	C1	JPT 3P ASS'Y FOR STANDARD	P/NO
85205-2	C1	JPT 3P ASS'Y FOR STANDARD	
85205-1	C1	JPT 3P ASS'Y FOR STANDARD	

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:
mm

MATERIAL

FINISH

DWN
SJ CHOI

CHK
JW JUNG

APVD
HG CHOI

PRODUCT SPEC
108-61000

APPLICATION SPEC
114-18018

WEIGHT

TOLERANCES UNLESS OTHERWISE SPECIFIED:
0<XX<10 ± 0.2
10<XX<30 ± 0.25
30<XX<100 ± 0.3
ANGLES ± 3°

CUSTOMER DRAWING

TE Connectivity

JPT 3P ASS'Y FOR STANDARD

SIZE
A3

CAGE CODE
00779

DRAWING NO
C=85205

RESTRICTED TO
-

SCALE
2:1

SHEET
1

OF
1

REV
C2