
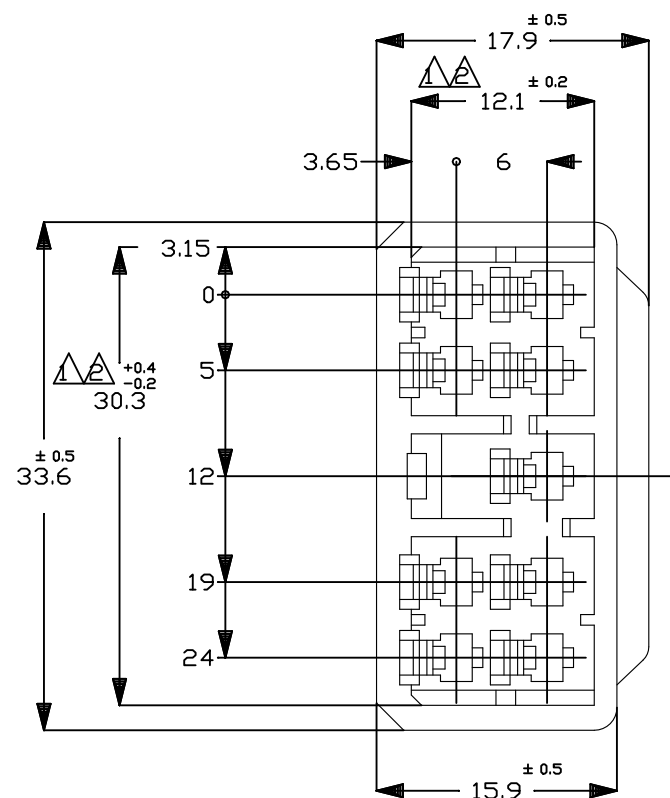


REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	A1	REVISED PER ECR-23-165252	30JAN2023	RK	MT

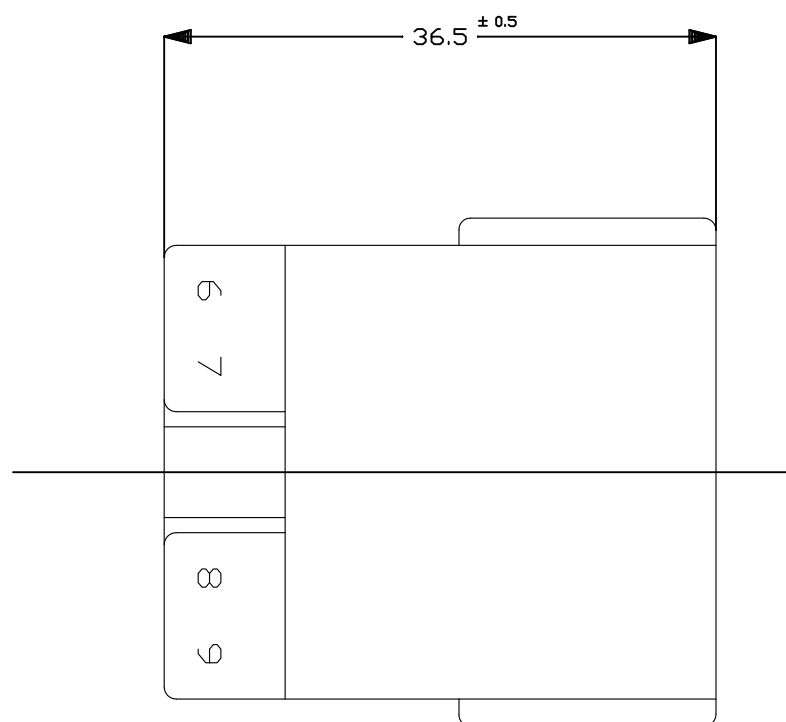


NOTES;


- ① TO BE MEASURED WITH IN 2mm FROM -A-
 ② IN COUPLING WITH THE PLUG HOUSING MATING SATISFIES FUNCTION
 3 APPLIED CONTACT P/N 172777,172779
 4 PRODUCT SPEC No. 108-5166
 5 IN COUPLING WITH THE PLUG HOUSING MATING FORCE 29.4N(3Kgf)MAX. WITHOUT REC CONTACT

注：

- ①  面より2mmの範囲で測定
- ② 相手ハウジングと所定の機能を満たして嵌合できること
- ③ 内装するタブコンタクト型番172777,172779他
- ④ 製品規格 NO.108-5166
- ⑤ 相手ハウジングとの嵌合力は29.4N(3Kg_f)以下
但しタブコンタクトは含まない

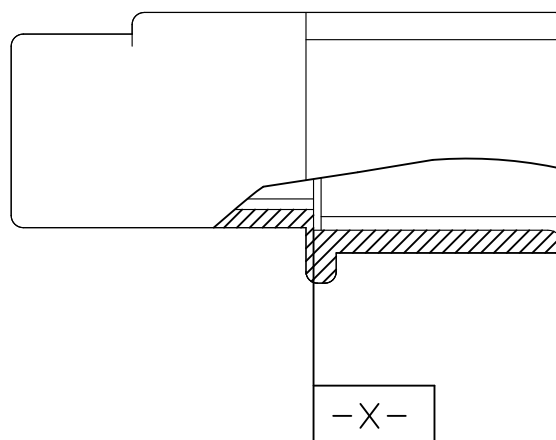

OBSOLETE	172506-7	黄<YELLOW>
OBSOLETE	172506-6	灰<GRAY>
OBSOLETE	172506-4	緑<GREEN>
OBSOLETE	172506-3	茶<BROWN>
	172506-2	黒<BLACK>
	172506-1	自然色<NATURAL>
	番号<PN>	色<COLOR>

THIS DRAWING IS A CONTROLLED DOCUMENT. DIMENSIONS: mm  MATERIAL (NYLON)	TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ± — 1 PLC ± — 2 PLC ± — 3 PLC ± — 4 PLC ± — ANGLES ± — FINISH —	DWN K.YUASA 10/12'92	TE Connectivity				
		CHK A.TOMITA 10/12'92	NAME 9 Pos. CAP HOUSING MULTI-INTERLOCK CONN. (MIC-MKII) —				
		APVD A.TOMITA 10/12'92					
		PRODUCT SPEC —					
		APPLICATION SPEC —	SIZE A3	CAGE CODE 00779	DRAWING NO G-172506	RESTRICTED TO —	
CUSTOMER DRAWING			SCALE 2:1	SHEET 1 OF 1	REV A1		