
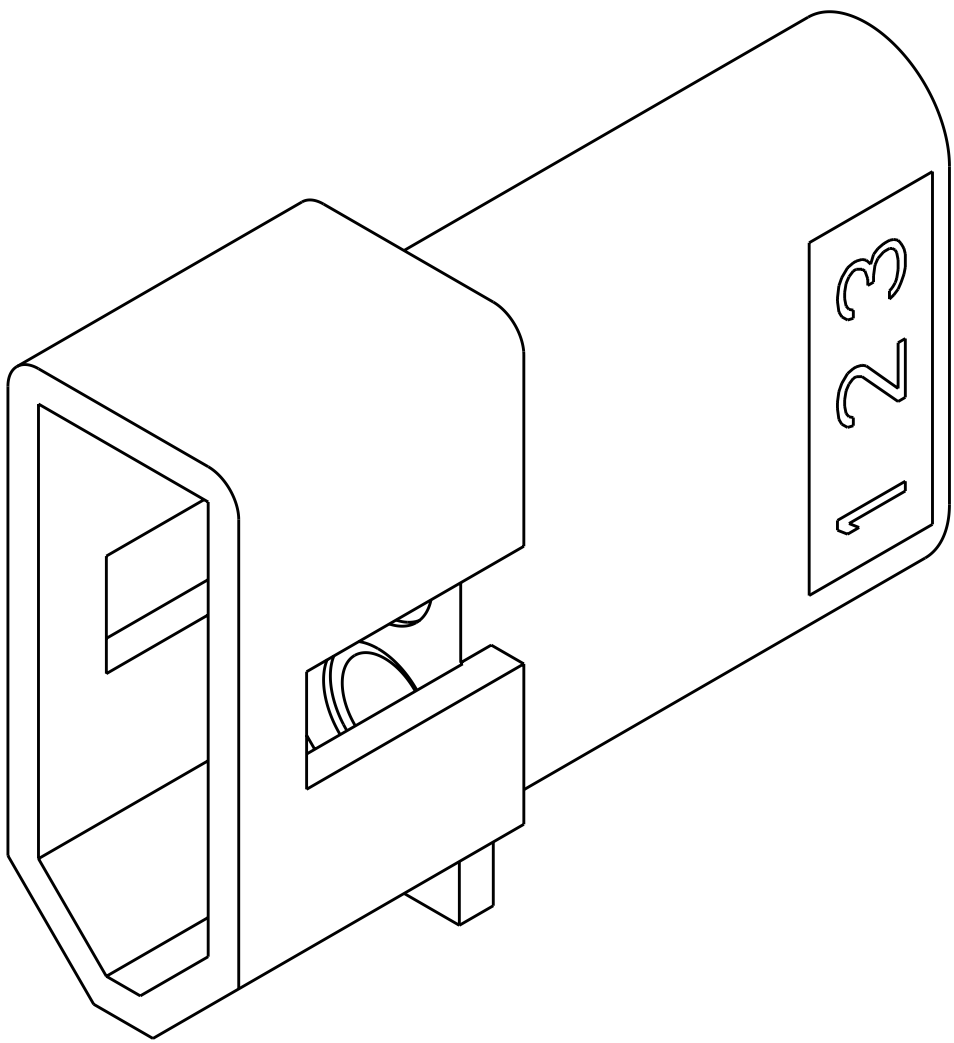
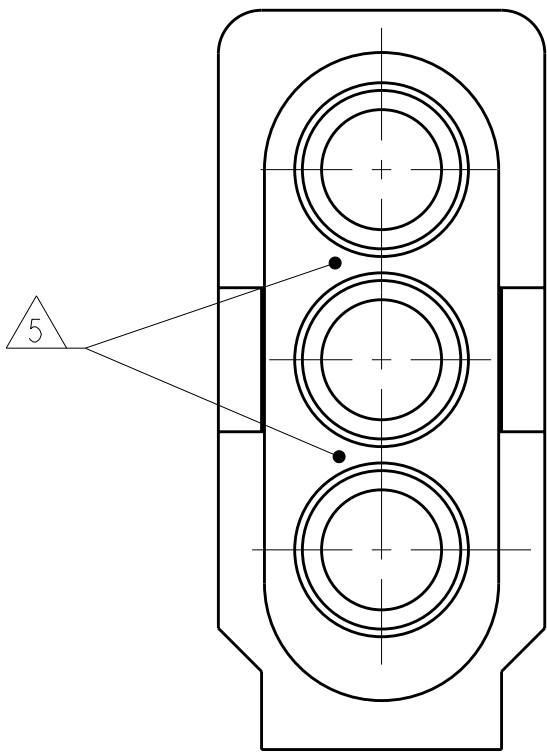
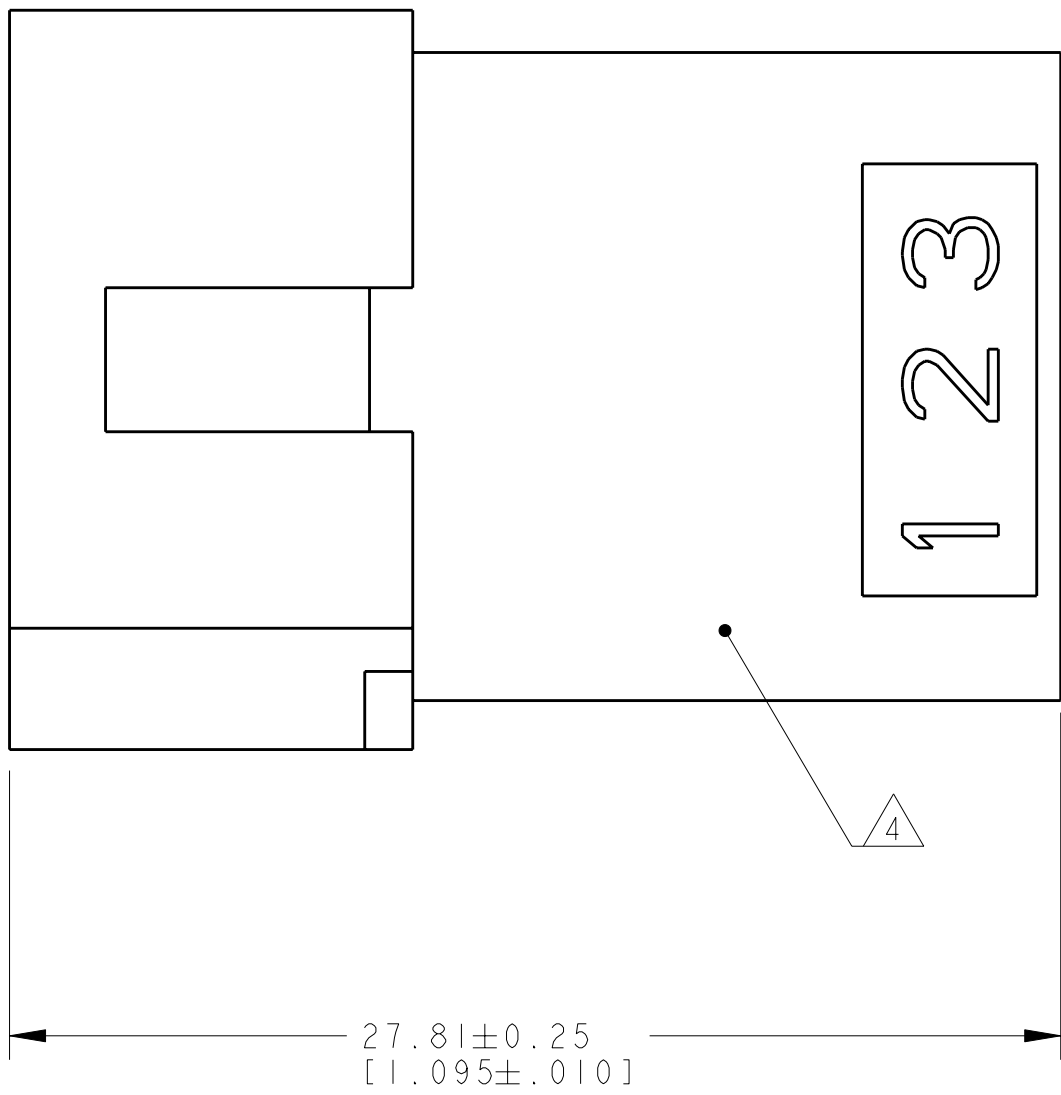


LOC		DIST		REVISIONS				
CM	00	P	LYR	DESCRIPTION	DATE	DWN	APVD	
		N1		REVISED PER ECO-11-005027	16MAY2011	RK	HMR	

- 1 MATERIAL: NYLON UL94V-2 (NATURAL).
2. RECOMMENDED PANEL THICKNESS 2.29 [.090] MAX.
3. MARKING FOR UL AND CSA LOGO SHALL BE LOCATED ON ANY EXTERNAL SURFACE.
- 4 AMP LOGO AND CIRCUIT NUMBERS LOCATED IN AREA, EITHER SIDE, SIZE OPTIONAL, FROST BACKGROUND.
- 5 WALL THICKNESS TO MEASURE 0.36-0.51 [.014-.020].

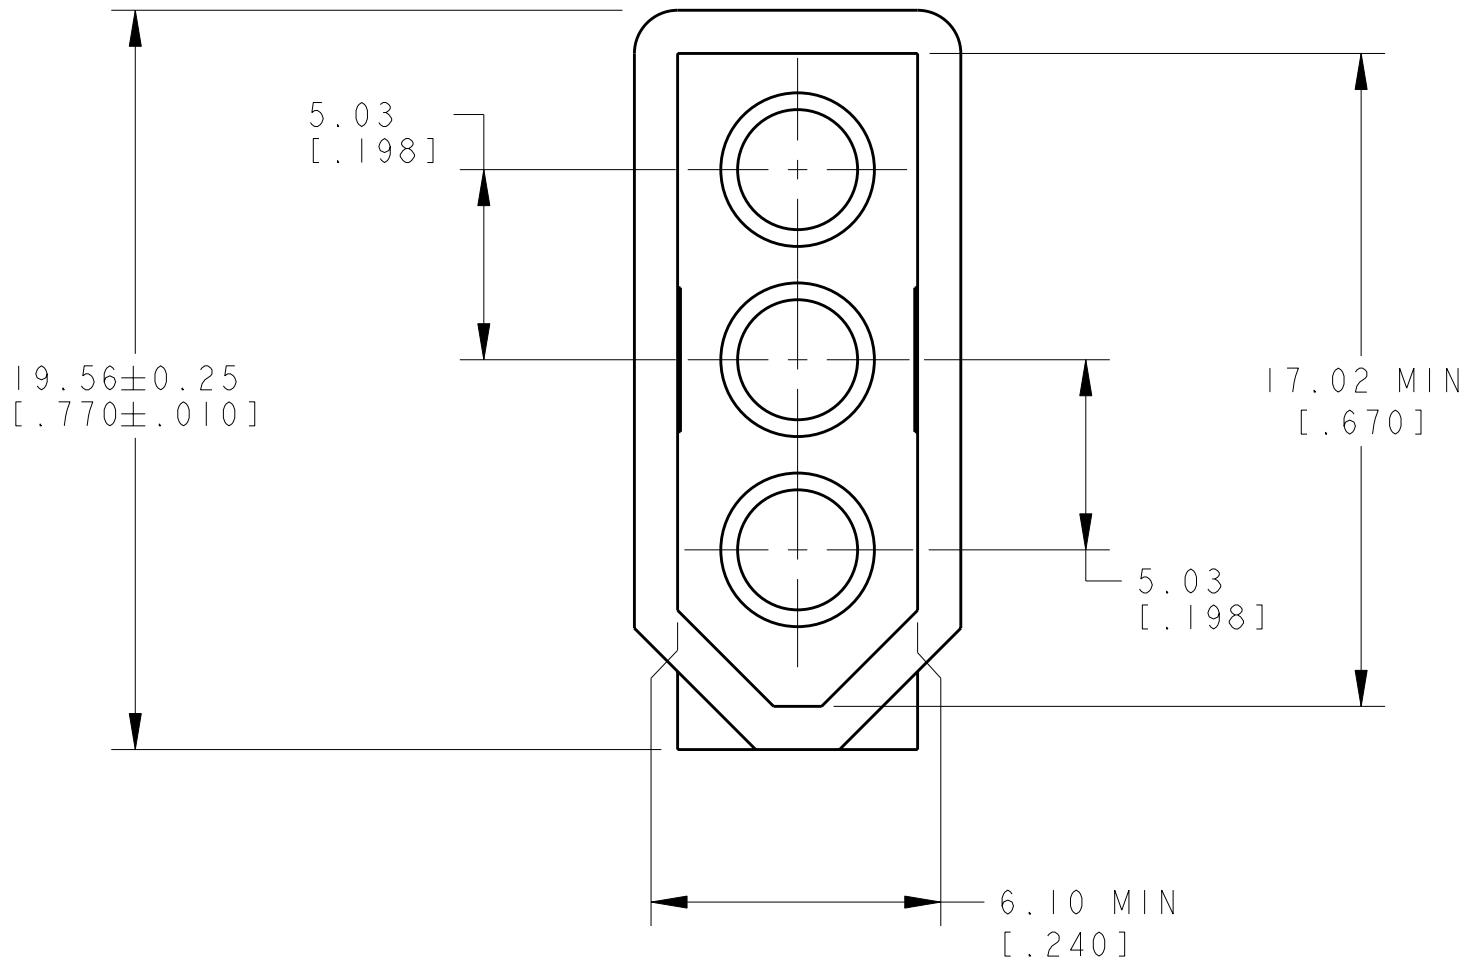

METRIC

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN R. WHITAKER	05AUG2004	TE Connectivity			
DIMENSIONS: mm [INCHES]		CHK D. COLEY	05AUG2004				
		APVD D. COLEY	05AUG2004	NAME			
		TOLERANCES UNLESS OTHERWISE SPECIFIED:		PRODUCT SPEC			
		0 PLC ± 1 PLC ± 2 PLC ±0.13 [.005] 3 PLC ± 4 PLC ±		APPLICATION SPEC			
		ANGLES ±0°30' FINISH -		WEIGHT -			
MATERIAL -		CUSTOMER DRAWING		SIZE CAGE CODE DRAWING NO		RESTRICTED TO	
				A100779C=770074			
				SCALE 5:1		SHEET 1 OF 1	
						REV N1	

770074-1
PART NUMBER

PLUG,
3 CIRCUIT,
.093 COMMERCIAL PIN AND SOCKET