

PNA series PoL Regulators

Input 9-36 V, Output up to 6 A / 33 W

1/28701 - BMR661 Rev. A

April 2021

© Flex

Key Features

- Small size
13.0 x 12.35 x 6.2 mm (0.512 x 0.486 x 0.244 in)
- 0.9 V – 5.5V output voltage range
- 6 A maximum output current
- High efficiency, typ. 93.8% at 24 Vin, 5.5 Vout, 6A load
- Control loop with fast load transient response
- Allows synchronization to an external clock
- Meets safety requirements according to IEC/EN/UL 62368-1
- MTBF 71.84 Mh

**General Characteristics**

- Output voltage adjust function
- Output over current protection
- Over temperature protection
- Remote control
- Power Good
- Soft start and Output voltage tracking
- Highly automated manufacturing ensures quality
- ISO 9001/14001 certified supplier

Safety Approvals**Design for Environment**

Meets requirements in high-temperature lead-free soldering processes.

Contents

Ordering Information	2
General Information	2
Safety Specification	3
Absolute Maximum Ratings	4
Electrical Specification	
0.9 V/ 6 A	5
1.8 V/ 6 A	8
3.3 V/ 6 A	11
5.5 V/ 6 A	14
Operating Information	18
Thermal Consideration	20
Connections	21
Mechanical Information	22
Delivery Package Information	24
Product Qualification Specification	25

PNA series PoL Regulators

Input 9-36 V, Output up to 6 A / 33 W

1/28701 - BMR661 Rev. A

April 2021

© Flex

Ordering Information

Product number	Output
PNA2405S3S	0.9-5.5V, 6 A/ 33 W

Product number and Packaging

PNA2405S3n ₁ n ₂		
Options	n ₁	n ₂
mechanical	o	
Delivery package information		o

Options	Description	
n ₁	S	Surface mount (solder bump)
n ₂	C	Tape and reel (One full reel contains 400 pcs products.)

Example: PNA2405S3S C means a Solder bump, positive logic product with tape and reel packaging. The reel capacity is 400 pcs products per reel.

General Information

Reliability

The failure rate (λ) and mean time between failures (MTBF = $1/\lambda$) is calculated at max output power and an operating ambient temperature (T_A) of +40°C. Flex Power uses Telcordia SR-332 Issue 4 Method 1 to calculate the mean steady-state failure rate and standard deviation (σ).

Telcordia SR-332 Issue 4 also provides techniques to estimate the upper confidence levels of failure rates based on the mean and standard deviation.

Mean steady-state failure rate, λ	Std. deviation, σ
14 nFailures/h	3.6 nFailures/h

MTBF (mean value) for the PMU series = 71.84 Mh.
MTBF at 90% confidence level = 53.99 Mh

Compatibility with RoHS requirements

The products are compatible with the relevant clauses and requirements of the RoHS directive 2011/65/EU and 2015/863 and have a maximum concentration value of 0.1% by weight in homogeneous materials for lead, mercury, hexavalent chromium, PBB, PBDE, DEHP, BBP, DBP, DIBP and of 0.01% by weight in homogeneous materials for cadmium.

Exemptions in the RoHS directive utilized in Flex Power products are found in the Statement of Compliance document.

Flex Power fulfills and will continuously fulfill all its obligations under regulation (EC) No 1907/2006 concerning

the registration, evaluation, authorization and restriction of chemicals (REACH) as they enter into force and is through product materials declarations preparing for the obligations to communicate information on substances in the products.

Quality Statement

The products are designed and manufactured in an industrial environment where quality systems and methods like ISO 9000, Six Sigma, and SPC are intensively in use to boost the continuous improvements strategy. Infant mortality or early failures in the products are screened out and they are subjected to an ATE-based final test. Conservative design rules, design reviews and product qualifications, plus the high competence of an engaged work force, contribute to the high quality of the products.

Warranty

Warranty period and conditions are defined in Flex Power General Terms and Conditions of Sale.

Limitation of Liability

Flex Power does not make any other warranties, expressed or implied including any warranty of merchantability or fitness for a particular purpose (including, but not limited to, use in life support applications, where malfunctions of product can cause injury to a person's health or life).

© Flex Power 2021

The information and specifications in this technical specification is believed to be correct at the time of publication. However, no liability is accepted for inaccuracies, printing errors or for any consequences thereof. Flex Power reserves the right to change the contents of this technical specification at any time without prior notice.

PNA series PoL Regulators Input 9-36 V, Output up to 6 A / 33 W	1/28701 - BMR661 Rev. A April 2021
	© Flex

Safety Specification

General information

Flex DC/DC converters and DC/DC regulators are designed in accordance with the safety standards IEC 62368-1, EN 62368-1 and UL 62368-1 *Audio/video, information and communication technology equipment - Part 1: Safety requirements*

IEC/EN/UL 62368-1 contains requirements to prevent injury or damage due to the following hazards:

- Electrical shock
- Electrically-caused fire
- Injury caused by hazardous substances
- Mechanically-caused injury
- Skin burn
- Radiation-caused injury

On-board DC/DC converters, Power interface modules and DC/DC regulators are defined as component power supplies. As components they cannot fully comply with the provisions of any safety requirements without “conditions of acceptability”. Clearance between conductors and between conductive parts of the component power supply and conductors on the board in the final product must meet the applicable safety requirements. Certain conditions of acceptability apply for component power supplies with limited stand-off (see Mechanical Information for further information). It is the responsibility of the installer to ensure that the final product housing these components complies with the requirements of all applicable safety standards and regulations for the final product.

Component power supplies for general use shall comply with the requirements in IEC/EN/UL 62368-1. Product related standards, e.g. IEEE 802.3af *Power over Ethernet*, and ETS-300132-2 *Power interface at the input to telecom equipment, operated by direct current (dc)* are based on IEC/EN/UL 60950-1 with regards to safety.

Flex DC/DC converters, Power interface modules and DC/DC regulators are UL 62368-1 recognized and certified in accordance with EN 62368-1. The flammability rating for all construction parts of the products meet requirements for V-0 class material according to IEC 60695-11-10, *Fire hazard testing, test flames* – 50 W horizontal and vertical flame test methods.

Non - isolated DC/DC regulators

The DC/DC regulator output is ES1 energy source if the input source meets the requirements for ES1 according to IEC/EN/UL 62368-1.

PNA series PoL Regulators

Input 9-36 V, Output up to 6 A / 33 W

1/28701 - BMR661 Rev. A

April 2021


© Flex

Absolute Maximum Ratings

Characteristics			min	typ	max	Unit
T_{P1}	Operating Temperature (See Thermal Consideration section)		-40		+125	°C
T_S	Storage temperature		-55		+150	°C
V_I	Input voltage		9		36	V
V_{RC}	Remote Control pin voltage (see Operating Information section)	Positive logic	-0.3		36	V

Stresses above those listed under Absolute Maximum Ratings may cause permanent damage to the device. This is a stress rating only; functional operation of the device at these or any other conditions above those indicated in the Electrical Specification section of this specification is not implied. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.

Typical Application Diagram

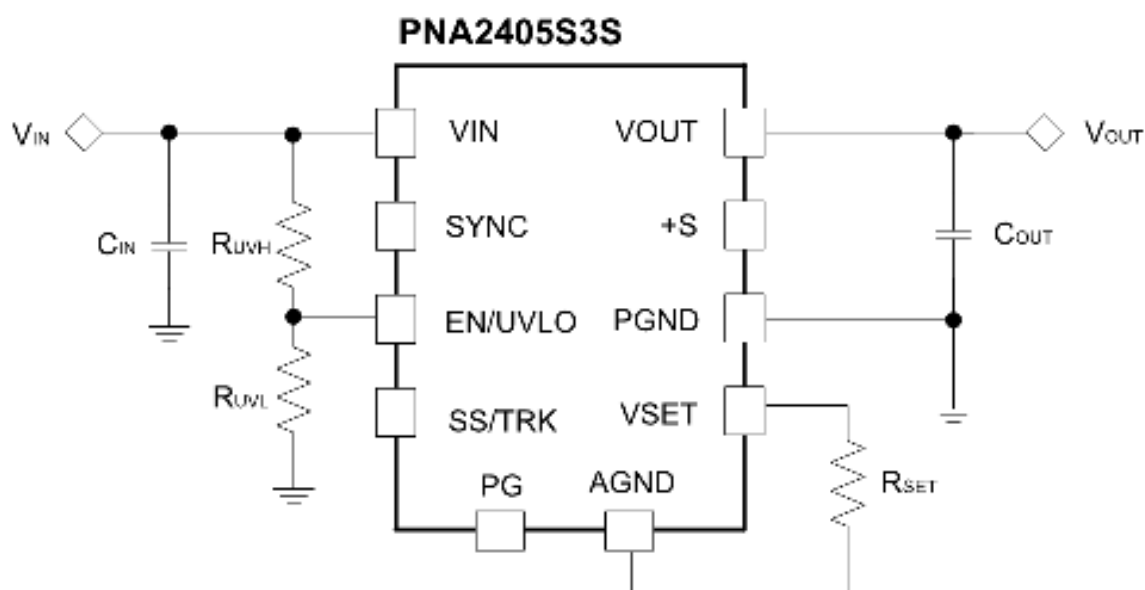

PNA series PoL Regulators
 Input 9-36 V, Output up to 6 A / 33 W

1/28701 - BMR661 Rev. A

April 2021

© Flex

Electrical Specification
 0.9 V, 6 A / 5.4 W

PNA2405S3S

 $T_{P1} = -40$ to $+85$ °C, $V_I = 9$ to 28 V, unless otherwise specified under Conditions.

 Typical values given at: $T_{P1} = +25$ °C, $V_I = 24$ V, max I_O , unless otherwise specified under Conditions.

 Additional $C_{in} = 100$ µF Electrolytic¹ + 2×4.7 µF Ceramic, $C_{out} = 2 \times 47$ µF Ceramic.

Characteristics		Conditions	min	typ	max	Unit
V_I	Input voltage range		9 ²		28	V
V_{loff}	Turn-off input voltage	Decreasing input voltage		7		V
V_{lon}	Turn-on input voltage	Increasing input voltage		8		V
C_i	Internal input capacitance			1.1		µF
P_O	Output power		0		5.4	W
η	Efficiency	50% of max I_O		72.5		%
		max I_O		75.9		
		50% of max I_O , $V_I = 12$ V		83.2		
		max I_O , $V_I = 12$ V		83.0		
P_d	Power Dissipation	max I_O		1.7		W
P_{li}	Input idling power	$I_O = 0$ A, $V_I = 24$ V		0.1		W
P_{RC}	Input standby power	$V_I = 24$ V (turned off with RC)		50		mW
f_s	Switching frequency	0-100 % of max I_O		450		kHz
V_{Oi}	Output voltage initial setting and accuracy	$T_{P1} = +25$ °C, $V_I = 24$ V, $I_O = 6$ A		0.9		V
V_O	Idling voltage	$I_O = 0$ A		0.9		V
	Line regulation	max I_O			9	mV
	Load regulation	$V_I = 24$ V, 0-100 % of max I_O			9	mV
V_{tr}	Load transient voltage deviation	$V_I = 24$ V, Load step 25-75-25% of max I_O , $di/dt = 1$ A/µs		±50		mV
t_{tr}	Load transient recovery time				80	µs
t_r	Ramp-up time (from 10–90% of V_{Oi})	$V_I = 24$ V, $I_O = \text{max } I_O$		3		ms
t_s	Start-up time (from V_I connection to 90% of V_{Oi})			4		ms
t_f	Shut-down time (from V_I off to 10% of V_{Oi})	$V_I = 24$ V, $I_O = \text{max } I_O$		30		ms
t_{RC}	RC start-up time (from V_{RC} connection to 90% of V_{Oi})	max I_O		4		ms
RC	Trigger level	Increasing RC-voltage		1.2		V
I_O	Output current		0		6	A
I_{lim}	Current limit threshold	$T_{P1} < \text{max } T_{P1}$	8	8.5	10	A
I_{sc}	Short circuit current	$T_{P1} = 25$ °C, RMS		1.7		A
V_{Oac}	Output ripple & noise	See ripple & noise section, V_{Oi}		6.1	9	mVp-p

Note 1. Electrolytic capacitor UPS2A101MHD from Nichicon with typical ESR value 0.18 Ω (20 °C 100 kHz).

Note 2. Minimum input voltage is increased for high output voltages. For output voltages below 5.0V, input undervoltage lockout threshold is recommended to set to 7V. For output voltages above 5.0V, input undervoltage lockout threshold is recommended to set to 9V. See Remote control and input undervoltage lockout (EN/UVLO) section for detailed information.

PNA series PoL Regulators

Input 9-36 V, Output up to 6 A / 33 W

1/28701 - BMR661 Rev. A

April 2021


© Flex

Typical Characteristics


0.9 V, 6 A / 5.4 W

PNA2405S3S


Efficiency

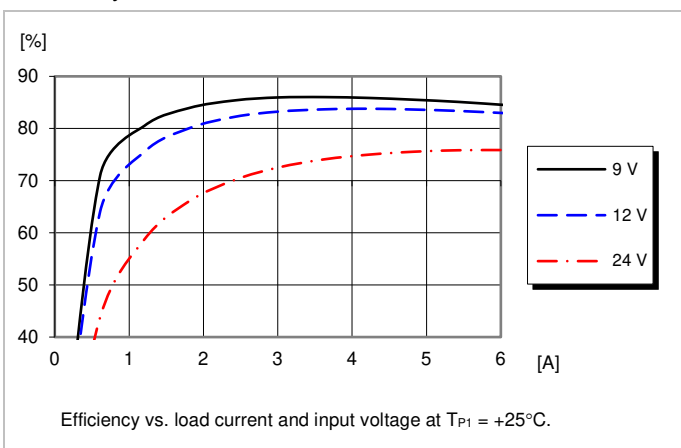


Power Dissipation

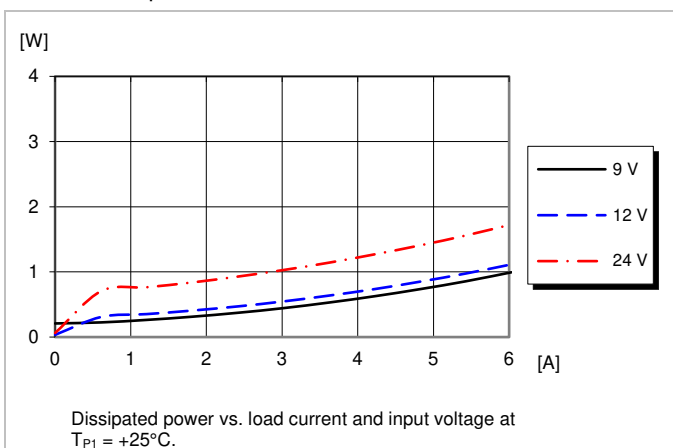

Thermal Derating

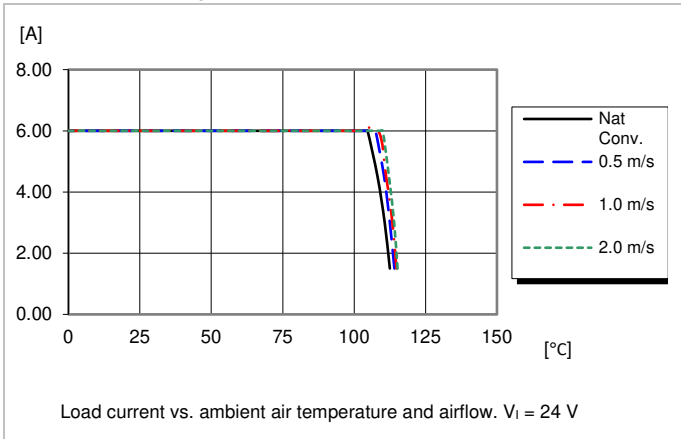

Load Regulation

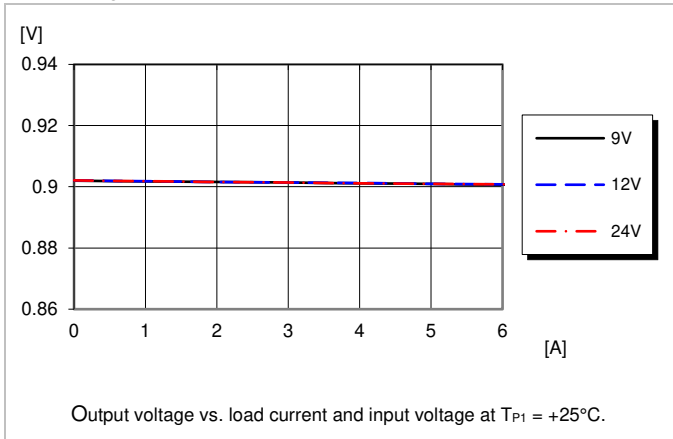

PNA series PoL Regulators

Input 9-36 V, Output up to 6 A / 33 W

1/28701 - BMR661 Rev. A

April 2021


© Flex

Typical Characteristics

0.9 V, 6 A / 5.4 W

PNA2405S3S


Start-up

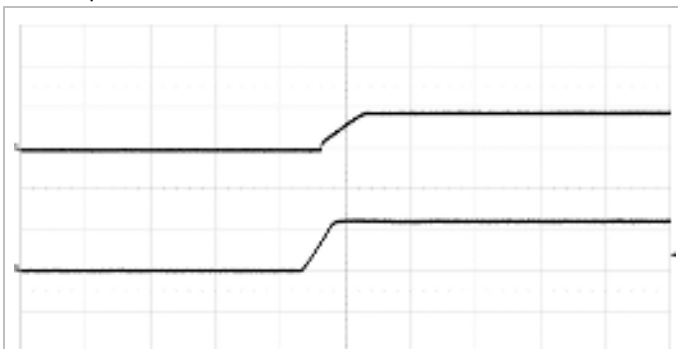

Start-up enabled by connecting V_I at:
 $T_{P1} = +25^{\circ}\text{C}$, $V_I = 24\text{ V}$,
 $I_O = 6\text{ A}$ resistive load.

Top trace: output voltage 1 V/div.
 Bottom trace: input voltage 20 V/div.
 Time scale: 5 ms/div.


Shut-down

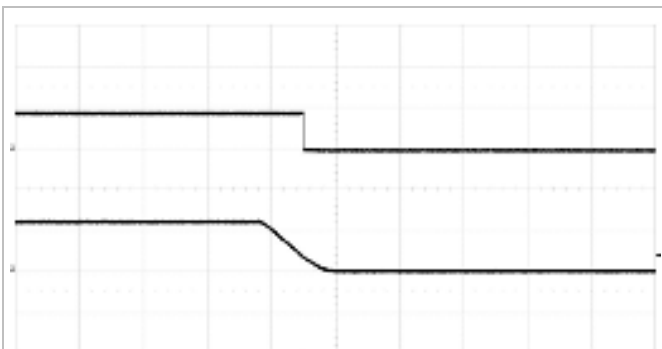

Shut-down enabled by disconnecting V_I at:
 $T_{P1} = +25^{\circ}\text{C}$, $V_I = 24\text{ V}$,
 $I_O = 6\text{ A}$ resistive load.

Top trace: output voltage 1 V/div.
 Bottom trace: input voltage 20 V/div.
 Time scale: 50 ms/div.

Output Ripple & Noise

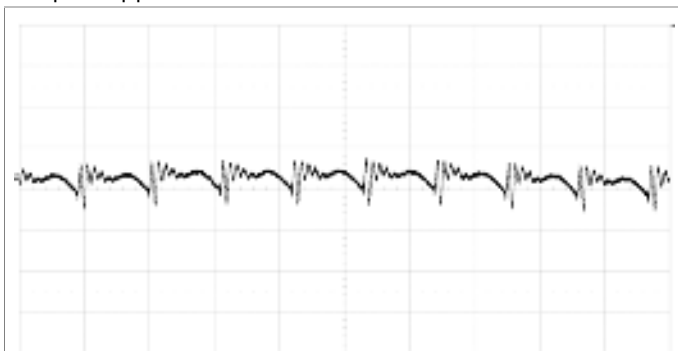

Output voltage ripple at:
 $T_{P1} = +25^{\circ}\text{C}$, $V_I = 24\text{ V}$,
 $I_O = 6\text{ A}$ electronic load.

Trace: output voltage 5 mV/div.
 Time scale: 2 μs /div.
 20 MHz bandwidth.

Output Load Transient Response



Output voltage response to load current step-
 change 1.5-4.5-1.5 A at:
 $T_{P1} = +25^{\circ}\text{C}$, $V_I = 24\text{ V}$.
 $C_{OUT} = 2 \times 47\text{ }\mu\text{F Ceramic} + 330\text{ }\mu\text{F Polymer}$

Top trace: output voltage 50 mV/div.
 Bottom trace: load current 2 A/div.
 Time scale: 200 μs /div.
 Slew rate: 1 A/ μs .
 20 MHz bandwidth.

PNA series PoL Regulators

Input 9-36 V, Output up to 6 A / 33 W

1/28701 - BMR661 Rev. A

April 2021

© Flex

Electrical Specification**PNA2405S3S**

1.8 V, 6 A / 10.8 W

 $T_{P1} = -40$ to $+85$ °C, $V_I = 9$ to 36 V, unless otherwise specified under Conditions.Typical values given at: $T_{P1} = +25$ °C, $V_I = 24$ V, max I_O , unless otherwise specified under Conditions.Additional $C_{in} = 100$ µF Electrolytic¹ + 2×4.7 µF Ceramic, $C_{out} = 2 \times 47$ µF Ceramic.

Characteristics		Conditions	min	typ	max	Unit
V_I	Input voltage range		9 ²		36	V
V_{loff}	Turn-off input voltage	Decreasing input voltage		7		V
V_{lon}	Turn-on input voltage	Increasing input voltage		8		V
C_I	Internal input capacitance			1.1		µF
P_O	Output power		0		10.8	W
η	Efficiency	50% of max I_O		83.6		%
		max I_O		85.8		
		50% of max I_O , $V_I = 12$ V		90.3		
		max I_O , $V_I = 12$ V		90.0		
P_d	Power Dissipation	max I_O		1.8		W
P_{li}	Input idling power	$I_O = 0$ A, $V_I = 24$ V		0.2		W
P_{RC}	Input standby power	$V_I = 24$ V (turned off with RC)		50		mW
f_s	Switching frequency	0-100 % of max I_O		450		kHz
V_{Oi}	Output voltage initial setting and accuracy	$T_{P1} = +25$ °C, $V_I = 24$ V, $I_O = 6$ A		1.78		V
V_O	Idling voltage	$I_O = 0$ A		1.78		V
	Line regulation	max I_O			18	mV
	Load regulation	$V_I = 24$ V, 0-100 % of max I_O			18	mV
V_{tr}	Load transient voltage deviation	$V_I = 24$ V, Load step 25-75-25% of max I_O , $di/dt = 1$ A/µs		±60		mV
t_{tr}	Load transient recovery time				80	µs
t_r	Ramp-up time (from 10–90% of V_{Oi})	$V_I = 24$ V, $I_O = \text{max } I_O$		3		ms
t_s	Start-up time (from V_I connection to 90% of V_{Oi})			4.5		ms
t_f	Shut-down time (from V_I off to 10% of V_{Oi})	$V_I = 24$ V, $I_O = \text{max } I_O$		25		ms
t_{RC}	RC start-up time (from V_{RC} connection to 90% of V_{Oi})	max I_O		4		ms
RC	Trigger level	Increasing RC-voltage		1.2		V
I_O	Output current		0		6	A
I_{lim}	Current limit threshold	$T_{P1} < \text{max } T_{P1}$	8	8.5	10	A
I_{sc}	Short circuit current	$T_{P1} = 25$ °C, RMS		1.7		A
V_{Oac}	Output ripple & noise	See ripple & noise section, V_{Oi}		7	18	mVp-p

Note 1. Electrolytic capacitor UPS2A101MHD from Nichicon with typical ESR value 0.18 Ω (20 °C 100 kHz).

Note 2. Minimum input voltage is increased for high output voltages. For output voltages below 5.0V, input undervoltage lockout threshold is recommended to set to 7V. For output voltages above 5.0V, input undervoltage lockout threshold is recommended to set to 9V. See Remote control and input undervoltage lockout (EN/UVLO) section for detailed information.

PNA series PoL Regulators

Input 9-36 V, Output up to 6 A / 33 W

1/28701 - BMR661 Rev. A

April 2021


© Flex

Typical Characteristics


1.8 V, 6 A / 10.8 W

PNA2405S3S


Efficiency

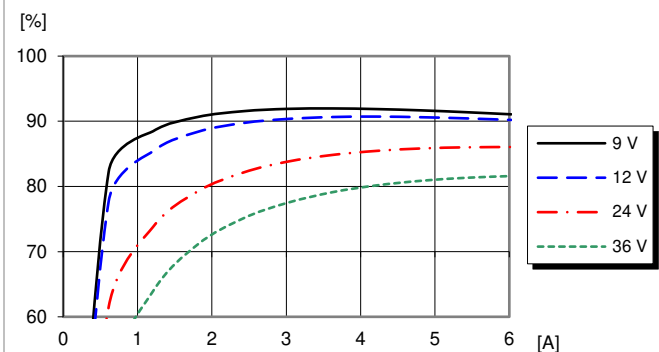Efficiency vs. load current and input voltage at $T_{P1} = +25^{\circ}\text{C}$.


Power Dissipation

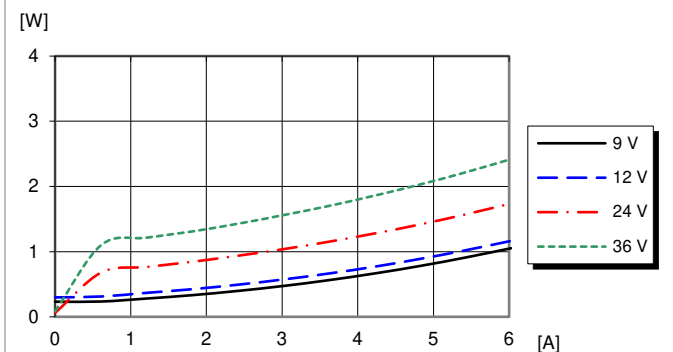Dissipated power vs. load current and input voltage at $T_{P1} = +25^{\circ}\text{C}$.

Thermal Derating

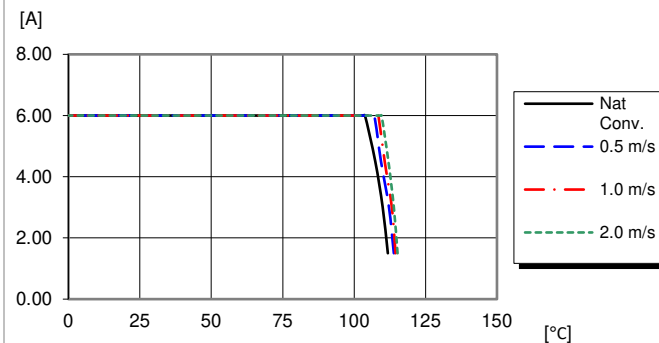Load current vs. ambient air temperature and airflow. $V_1 = 24\text{ V}$

Load Regulation

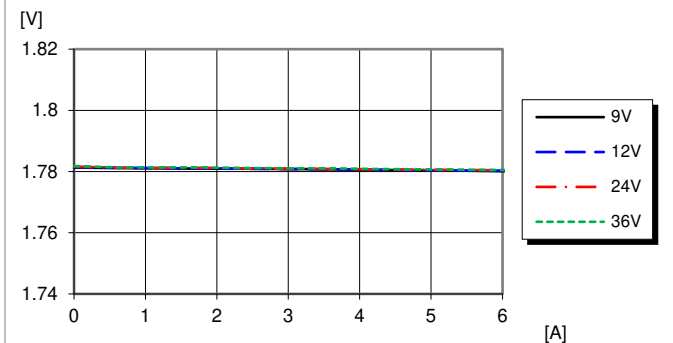Output voltage vs. load current and input voltage at $T_{P1} = +25^{\circ}\text{C}$.

PNA series PoL Regulators

Input 9-36 V, Output up to 6 A / 33 W

1/28701 - BMR661 Rev. A

April 2021


© Flex

Typical Characteristics

1.8 V, 6 A / 10.8 W

PNA2405S3S


Start-up

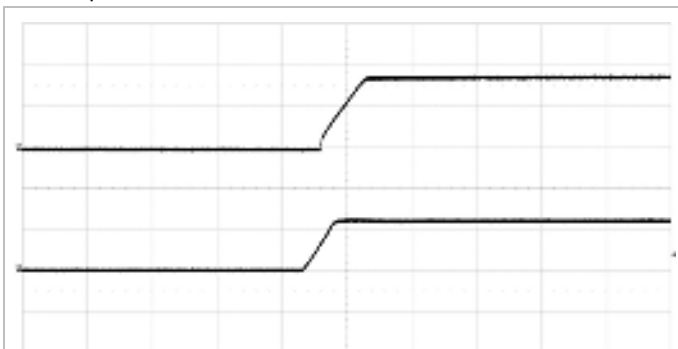

Start-up enabled by connecting V_I at:
 $T_{P1} = +25^{\circ}\text{C}$, $V_I = 24\text{ V}$,
 $I_O = 6\text{ A}$ resistive load.

Top trace: output voltage 1 V/div.
 Bottom trace: input voltage 20 V/div.
 Time scale: 5 ms/div.


Shut-down

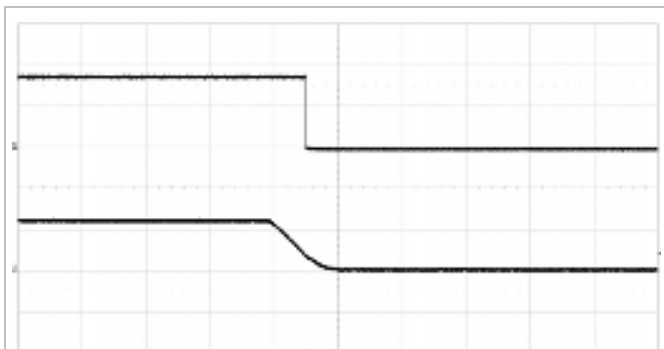

Shut-down enabled by disconnecting V_I at:
 $T_{P1} = +25^{\circ}\text{C}$, $V_I = 24\text{ V}$,
 $I_O = 6\text{ A}$ resistive load.

Top trace: output voltage 1 V/div.
 Bottom trace: input voltage 20 V/div.
 Time scale: 50 ms/div.

Output Ripple & Noise

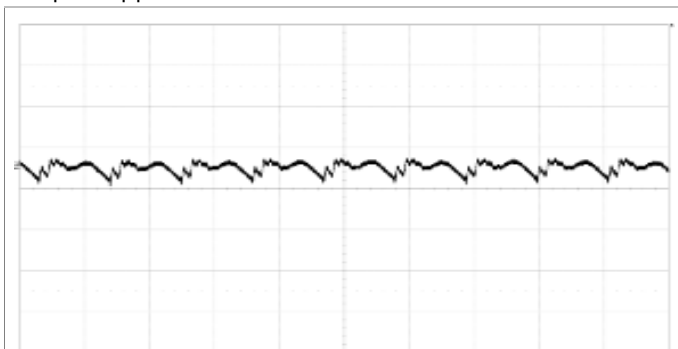

Output voltage ripple at:
 $T_{P1} = +25^{\circ}\text{C}$, $V_I = 24\text{ V}$,
 $I_O = 6\text{ A}$ electronic load.

Trace: output voltage 10 mV/div.
 Time scale: 2 μs /div.
 20 MHz bandwidth.

Output Load Transient Response



Output voltage response to load current step-
 change 1.5-4.5-1.5 A at:
 $T_{P1} = +25^{\circ}\text{C}$, $V_I = 24\text{ V}$,
 $C_{OUT} = 2 \times 47\text{ }\mu\text{F Ceramic} + 330\text{ }\mu\text{F Polymer}$

Top trace: output voltage 50 mV/div.
 Bottom trace: load current 2 A/div.
 Time scale: 200 μs /div.
 Slew rate: 1A/ μs .
 20 MHz bandwidth.

PNA series PoL Regulators

Input 9-36 V, Output up to 6 A / 33 W

1/28701 - BMR661 Rev. A

April 2021

© Flex

Electrical Specification**PNA2405S3S****3.3 V, 6 A / 19.8 W** $T_{P1} = -40$ to $+85$ °C, $V_I = 9$ to 36 V, unless otherwise specified under Conditions.Typical values given at: $T_{P1} = +25$ °C, $V_I = 24$ V, max I_O , unless otherwise specified under Conditions.Additional $C_{in} = 100$ µF Electrolytic¹ + 2×4.7 µF Ceramic, $C_{out} = 2 \times 47$ µF Ceramic.

Characteristics		Conditions	min	typ	max	Unit
V_I	Input voltage range		9 ²		36	V
V_{loff}	Turn-off input voltage	Decreasing input voltage		7		V
V_{lon}	Turn-on input voltage	Increasing input voltage		8		V
C_i	Internal input capacitance			1.1		µF
P_O	Output power		0		19.8	W
η	Efficiency	50% of max I_O		89.6		%
		max I_O		91.2		
		50% of max I_O , $V_I = 12$ V		93.7		
		max I_O , $V_I = 12$ V		93.4		
P_d	Power Dissipation	max I_O		1.9		W
P_{li}	Input idling power	$I_O = 0$ A, $V_I = 24$ V		0.7		W
P_{RC}	Input standby power	$V_I = 24$ V (turned off with RC)		50		mW
f_s	Switching frequency	0-100 % of max I_O		450		kHz
V_{Oi}	Output voltage initial setting and accuracy	$T_{P1} = +25$ °C, $V_I = 24$ V, $I_O = 6$ A		3.27		V
V_O	Idling voltage	$I_O = 0$ A		3.27		V
	Line regulation	max I_O			33	mV
	Load regulation	$V_I = 24$ V, 0-100 % of max I_O			33	mV
V_{tr}	Load transient voltage deviation	$V_I = 24$ V, Load step 25-75-25% of max I_O , $di/dt = 1$ A/µs		±60		mV
t_{tr}	Load transient recovery time				100	µs
t_r	Ramp-up time (from 10–90% of V_{Oi})	$V_I = 24$ V, $I_O = \text{max } I_O$		3		ms
t_s	Start-up time (from V_I connection to 90% of V_{Oi})			4		ms
t_f	Shut-down time (from V_I off to 10% of V_{Oi})	$V_I = 24$ V, $I_O = \text{max } I_O$		20		ms
t_{RC}	RC start-up time (from V_{RC} connection to 90% of V_{Oi})	max I_O		4		ms
RC	Trigger level	Increasing RC-voltage		1.2		V
I_O	Output current		0		6	A
I_{lim}	Current limit threshold	$T_{P1} < \text{max } T_{P1}$	8	8.5	11	A
I_{sc}	Short circuit current	$T_{P1} = 25$ °C, RMS		1.7		A
V_{Oac}	Output ripple & noise	See ripple & noise section, V_{Oi}		10	33	mVp-p

Note 1. Electrolytic capacitor UPS2A101MHD from Nichicon with typical ESR value 0.18 Ω (20 °C 100 kHz).

Note 2. Minimum input voltage is increased for high output voltages. For output voltages below 5.0V, input undervoltage lockout threshold is recommended to set to 7V. For output voltages above 5.0V, input undervoltage lockout threshold is recommended to set to 9V. See Remote control and input undervoltage lockout (EN/UVLO) section for detailed information.

PNA series PoL Regulators

Input 9-36 V, Output up to 6 A / 33 W

1/28701 - BMR661 Rev. A





April 2021

© Flex

Typical Characteristics

3.3 V, 6 A / 19.8 W

PNA2405S3S

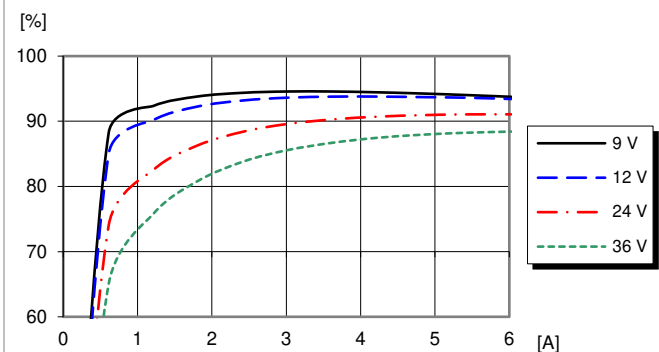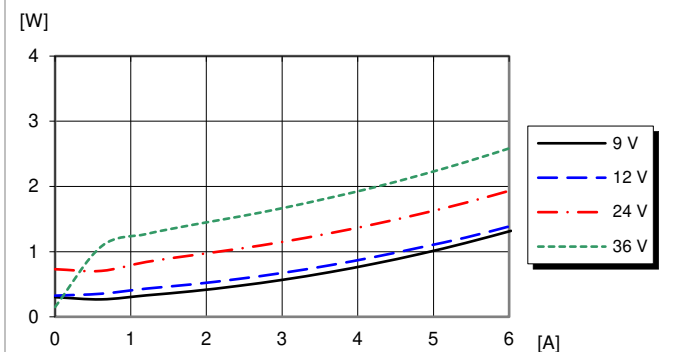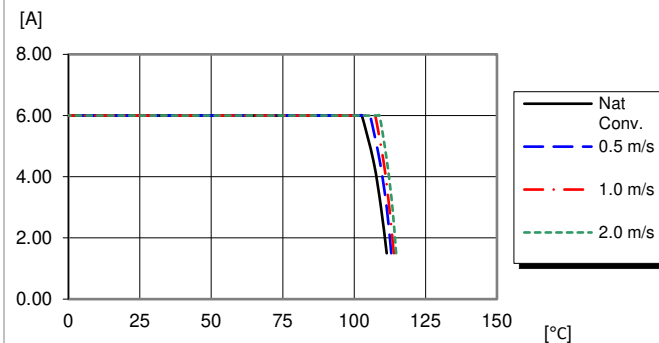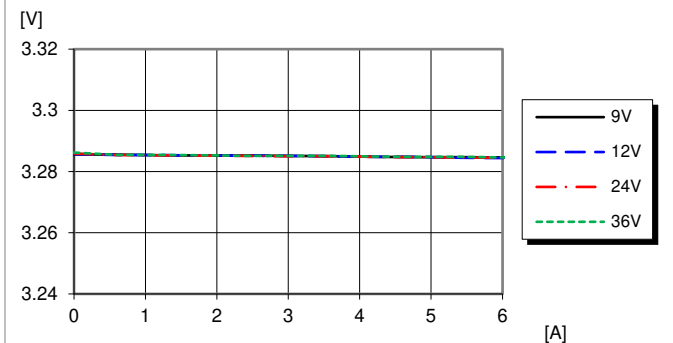EfficiencyEfficiency vs. load current and input voltage at $T_{P1} = +25^{\circ}\text{C}$.**Power Dissipation**Dissipated power vs. load current and input voltage at $T_{P1} = +25^{\circ}\text{C}$.**Thermal Derating**Load current vs. ambient air temperature and airflow. $V_I = 24\text{ V}$ **Load Regulation**Output voltage vs. load current and input voltage at $T_{P1} = +25^{\circ}\text{C}$.

PNA series PoL Regulators

Input 9-36 V, Output up to 6 A / 33 W

1/28701 - BMR661 Rev. A

April 2021


© Flex

Typical Characteristics

3.3 V, 6 A / 19.8 W

PNA2405S3S


Start-up

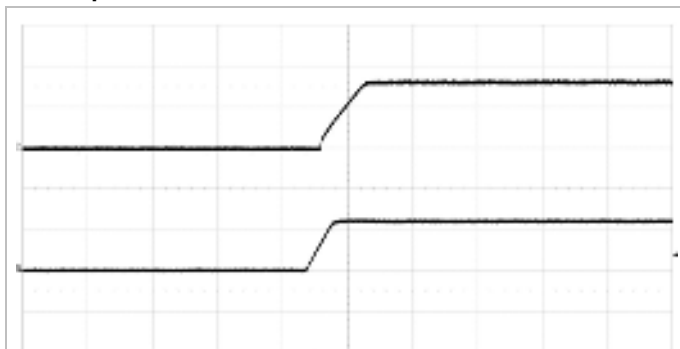

Start-up enabled by connecting V_I at:
 $T_{P1} = +25^{\circ}\text{C}$, $V_I = 24\text{ V}$,
 $I_O = 6\text{ A}$ resistive load.

Top trace: output voltage 2 V/div.
 Bottom trace: input voltage 20 V/div.
 Time scale: 50 ms/div.


Shut-down

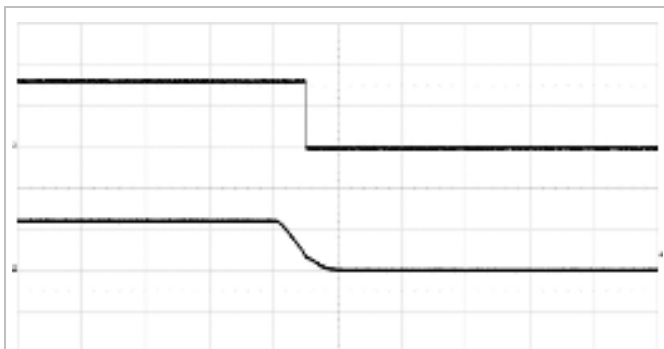

Shut-down enabled by disconnecting V_I at:
 $T_{P1} = +25^{\circ}\text{C}$, $V_I = 24\text{ V}$,
 $I_O = 6\text{ A}$ resistive load.

Top trace: output voltage 2 V/div.
 Bottom trace: input voltage 20 V/div.
 Time scale: 50 ms/div.

Output Ripple & Noise

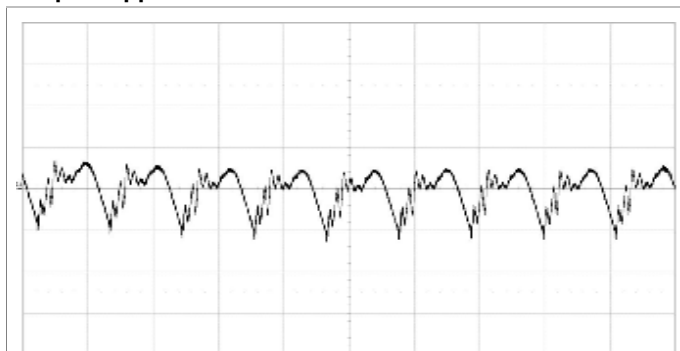

Output voltage ripple at:
 $T_{P1} = +25^{\circ}\text{C}$, $V_I = 24\text{ V}$,
 $I_O = 6\text{ A}$ electronic load.

Trace: output voltage 5 mV/div.
 Time scale: 2 μs/div.
 20 MHz bandwidth.

Output Load Transient Response



Output voltage response to load current step-
 change 1.5-4.5-1.5 A at:
 $T_{P1} = +25^{\circ}\text{C}$, $V_I = 24\text{ V}$.
 $C_{OUT} = 2 \times 47\text{ μF Ceramic} + 330\text{ μF Polymer}$

Top trace: output voltage 100 mV/div.
 Bottom trace: load current 2 A/div.
 Time scale: 100 μs/div.
 Slew rate: 1A/μs.
 20 MHz bandwidth.

PNA series PoL Regulators

Input 9-36 V, Output up to 6 A / 33 W

1/28701 - BMR661 Rev. A

April 2021

© Flex

Electrical Specification**PNA2405S3S****5.5 V, 6 A / 33 W** $T_{P1} = -40$ to $+85$ °C, $V_I = 12$ to 36 V, unless otherwise specified under Conditions.Typical values given at: $T_{P1} = +25$ °C, $V_I = 24$ V, max I_O , unless otherwise specified under Conditions.Additional $C_{in} = 100$ μ F Electrolytic¹ + 2×4.7 μ F Ceramic, $C_{out} = 2 \times 47$ μ F Ceramic.

Characteristics		Conditions	min	typ	max	Unit
V_I	Input voltage range		11 ²		36	V
V_{loff}	Turn-off input voltage	Decreasing input voltage		7		V
V_{lon}	Turn-on input voltage	Increasing input voltage		8		V
C_I	Internal input capacitance			1.1		μ F
P_O	Output power		0		33	W
η	Efficiency	50% of max I_O		92.4		%
		max I_O		93.8		
		50% of max I_O , $V_I = 12$ V		95.7		
		max I_O , $V_I = 12$ V		95.5		
P_d	Power Dissipation	max I_O		2.2		W
P_{li}	Input idling power	$I_O = 0$ A, $V_I = 24$ V		0.8		W
P_{RC}	Input standby power	$V_I = 24$ V (turned off with RC)		40		mW
f_s	Switching frequency	0-100 % of max I_O		450		kHz
V_{Oi}	Output voltage initial setting and accuracy	$T_{P1} = +25$ °C, $V_I = 24$ V, $I_O = 6$ A		5.49		V
V_O	Idling voltage	$I_O = 0$ A		5.49		V
	Line regulation	max I_O			55	mV
	Load regulation	$V_I = 24$ V, 0-100 % of max I_O		2	55	mV
V_{tr}	Load transient voltage deviation	$V_I = 24$ V, Load step 25-75-25% of max I_O , $di/dt = 1$ A/ μ s		± 50		mV
t_{tr}	Load transient recovery time				100	μ s
t_r	Ramp-up time (from 10–90% of V_{Oi})	$V_I = 24$ V, $I_O = \text{max } I_O$		3		ms
t_s	Start-up time (from V_I connection to 90% of V_{Oi})			4		ms
t_f	Shut-down time (from V_I off to 10% of V_{Oi})	$V_I = 24$ V, $I_O = \text{max } I_O$		16		ms
t_{RC}	RC start-up time (from V_{RC} connection to 90% of V_{Oi})	max I_O		4		ms
RC	Trigger level	Increasing RC-voltage		1.2		V
I_O	Output current		0		6	A
I_{lim}	Current limit threshold	$T_{P1} < \text{max } T_{P1}$	8	10	11	A
I_{sc}	Short circuit current	$T_{P1} = 25$ °C, RMS		1.6		A
V_{Oac}	Output ripple & noise	See ripple & noise section, V_{Oi}		14	55	mVp-p

Note 1. Electrolytic capacitor UPS2A101MHD from Nichicon with typical ESR value 0.18 Ω (20 °C 100 kHz).

Note 2. Minimum input voltage is increased for high output voltages. For output voltages below 5.0V, input undervoltage lockout threshold is recommended to set to 7V. For output voltages above 5.0V, input undervoltage lockout threshold is recommended to set to 9V. See Remote control and input undervoltage lockout (EN/UVLO) section for detailed information.

PNA series PoL Regulators

Input 9-36 V, Output up to 6 A / 33 W

1/28701 - BMR661 Rev. A

April 2021


© Flex

Typical Characteristics

5.5 V, 6 A / 33 W


PNA2405S3S

Efficiency

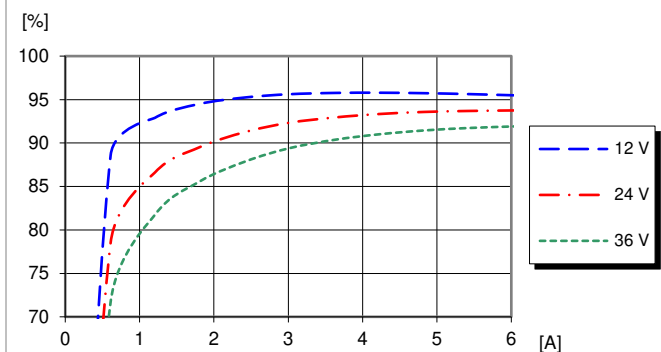


Efficiency vs. load current and input voltage at $T_{P1} = +25^{\circ}\text{C}$.

Power Dissipation

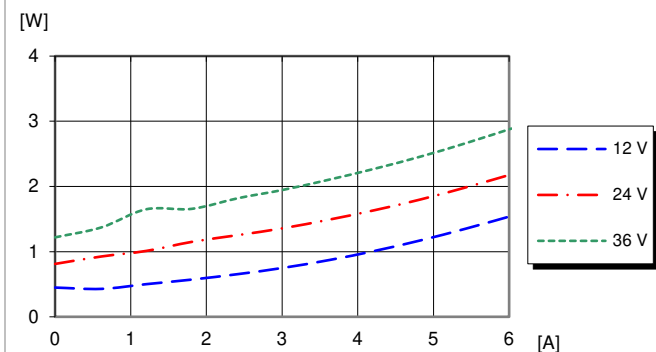


Dissipated power vs. load current and input voltage at $T_{P1} = +25^{\circ}\text{C}$.

Thermal Derating

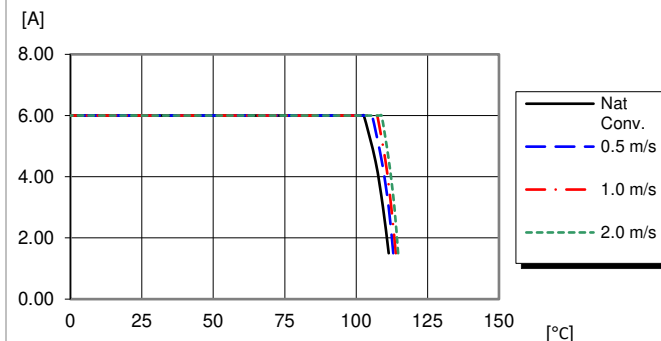

Load current vs. ambient air temperature and airflow. $V_I = 24\text{ V}$

Load Regulation

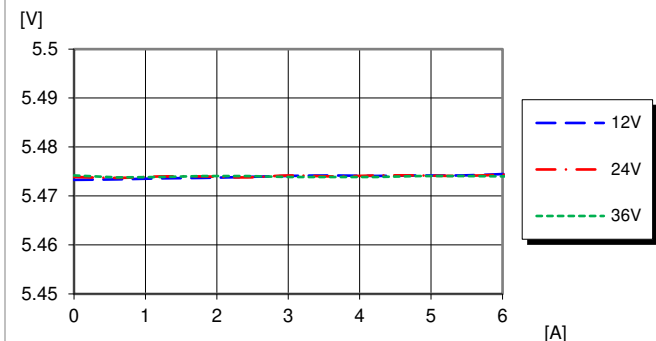

Output voltage vs. load current and input voltage at $T_{P1} = +25^{\circ}\text{C}$.

PNA series PoL Regulators

Input 9-36 V, Output up to 6 A / 33 W

1/28701 - BMR661 Rev. A

April 2021


© Flex

Typical Characteristics

5.5 V, 6 A / 33 W

PNA2405S3S


Start-up

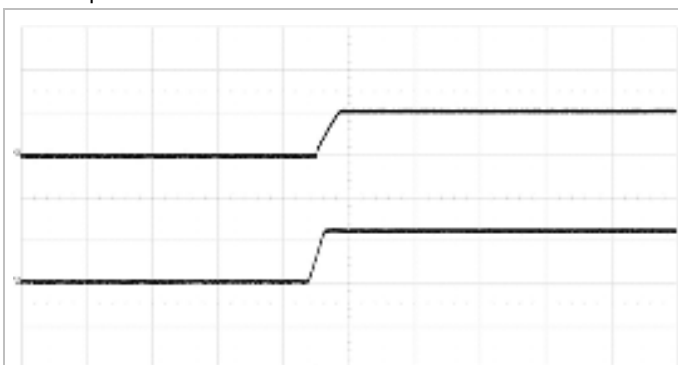

Start-up enabled by connecting V_I at:
 $T_{P1} = +25^{\circ}\text{C}$, $V_I = 24\text{ V}$,
 $I_O = 6\text{ A}$ resistive load.

Top trace: output voltage 5 V/div.
 Bottom trace: input voltage 20 V/div.
 Time scale: 10 ms/div.


Shut-down

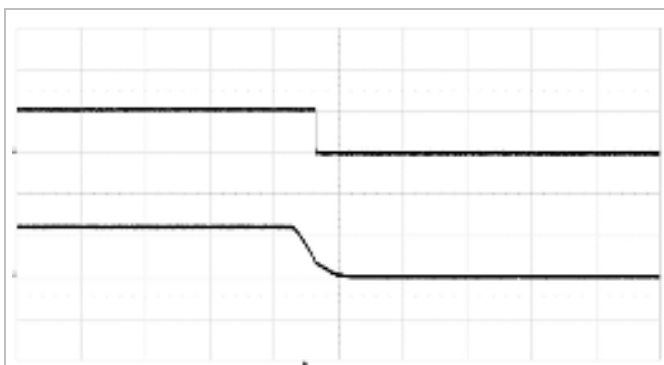

Shut-down enabled by disconnecting V_I at:
 $T_{P1} = +25^{\circ}\text{C}$, $V_I = 24\text{ V}$,
 $I_O = 6\text{ A}$ resistive load.

Top trace: output voltage 5 V/div.
 Bottom trace: input voltage 20 V/div.
 Time scale: 50 ms/div.

Output Ripple & Noise

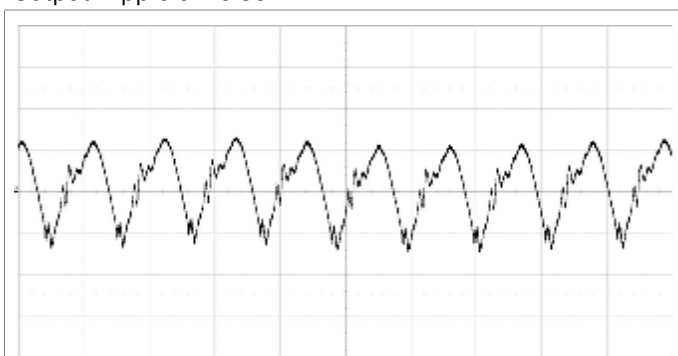

Output voltage ripple at:
 $T_{P1} = +25^{\circ}\text{C}$, $V_I = 24\text{ V}$,
 $I_O = 6\text{ A}$ electronic load.

Trace: output voltage 5 mV/div.
 Time scale: 2 μs /div.
 20 MHz bandwidth.

Output Load Transient Response



Output voltage response to load current step-
 change 1.5-4.5-1.5 A at:
 $T_{P1} = +25^{\circ}\text{C}$, $V_I = 24\text{ V}$.
 $C_{OUT} = 2 \times 47\text{ }\mu\text{F Ceramic} + 330\text{ }\mu\text{F Polymer}$

Top trace: output voltage 100 mV/div.
 Bottom trace: load current 2 A/div.
 Time scale: 200 μs /div.
 Slew rate: 1 A/ μs .
 20 MHz bandwidth.

PNA series PoL Regulators

Input 9-36 V, Output up to 6 A / 33 W


1/28701 - BMR661 Rev. A

April 2021

© Flex

Output ripple and noise


Output ripple and noise measured according to figure below.

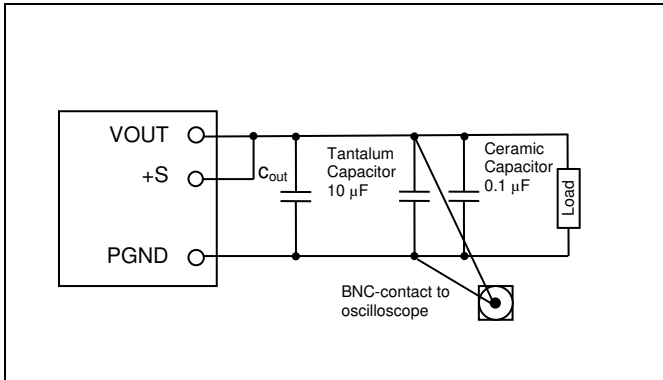

Output ripple and noise test setup

The module is designed for low ripple voltage at the module output and will meet the maximum output ripple specification with 0.1 µF ceramic and 10 µF tantalum at the output of the module.

The loop compensation setting is designed to provide stability, accurate line and load regulation and good transient performance for a wide range of operating conditions. Inherent from the implementation and normal to the product there will be some low frequency ripple at the output, in addition to the fundamental switching frequency output ripple. This low frequency ripple is not related to instability of control loop. The total output ripple and noise is maintained at a low level.

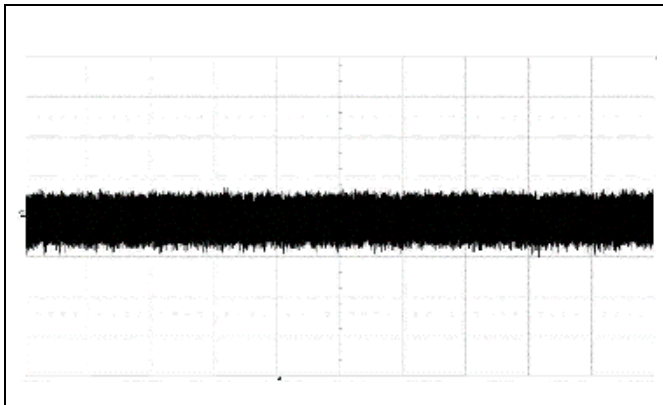

$V_I = 24 \text{ V}$, $V_{OUT} = 5.5 \text{ V}$, $I_O = 6 \text{ A}$, $C_{OUT} = 2 \times 47 \text{ µF}$, 20 mV/div, 1 ms/div

Example of low frequency ripple at the output.

PNA series PoL Regulators

Input 9-36 V, Output up to 6 A / 33 W


1/28701 - BMR661 Rev. A

April 2021

© Flex

Operating information**Input Voltage**

The input voltage range is 9 to 36 Vdc meets typical requirements in 12 V DC and 24 V DC system used in telecom, datacom, industrial and medical equipment.

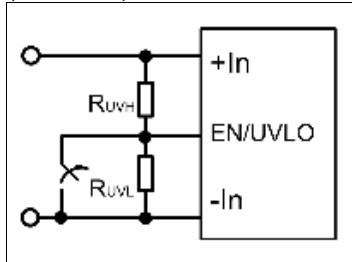Remote control and input undervoltage lockout (EN/UVLO)

The products are fitted with a remote control function referenced to the negative input connection (-In). The remote control function allows the product to be turned on/off by an external device like a semiconductor or mechanical switch.

The standard product is provided with “positive logic”. An external pull up resistor is required for EN pin. To turn on the product, EN pin should be left open. To turn off the product, EN pin should be connected to -In.

The device also supports adjustable input undervoltage lockout setting by adding a voltage divider on EN/UVLO pin. When EN voltage is below 0.37V, the device is in shutdown mode. When it exceeds 1.2V, an internal 10 μ A current source is enabled and flows through the external voltage divider to provide hysteresis. The high side and low side resistor values could be calculated by Equation 1 and 2.

$$R_{UVH} = \frac{V_{IN(ON)} - V_{IN(OFF)}}{10\mu A} \quad \text{Equation 1}$$

$$R_{UVL} = R_{UVH} * \frac{1.2}{V_{IN(ON)} - 1.2} \quad \text{Equation 2}$$

Input and Output Impedance

The impedance of both the input source and the load will interact with the impedance of the product. It is important that the input source has low characteristic impedance. If the input voltage source contains significant inductance, the addition of a capacitor with low ESR across the input of the product will ensure stable operation.

External Input Capacitors

It is recommended to use a combination of ceramic capacitors and an electrolytic capacitor on the input side. Additional 100 μ F of non-ceramic capacitance is recommended for applications with large transient load requirements. At least 50 V voltage rating is recommended for both type of capacitors to cover the wide input voltage range.

The required ceramic capacitors must be placed as close as possible to VIN pins to minimize the input voltage ripple.

External Output Capacitors

The output capacitors must have low ESR value to achieve low output ripple voltage.

External output capacitors must be placed as close as possible to VOUT pins of the product. Minimum two 47 μ F ceramic capacitors are recommended. It is important to use low resistance and low inductance PCB layout and cabling for effective capacitance.

Remote Sense (+S)

The products have remote sense that can be used to compensate for voltage drops between the output and the point of load. The sense traces should be located close to the PWB ground layer to reduce noise susceptibility. The internal resistor between +S and VOUT is 47 Ω . If the remote sense is not needed, +S should be connected to VOUT.

Over Current Protection

The product is protected from over current conditions in hiccup mode. When overcurrent condition exists for 128 continuous clock cycles, a hiccup event is triggered and SS is pulled low for 8192 clock cycles. The product will resume normal operation after removal of the overload.

Synchronization (SYNC)

It is possible to synchronize the product with an external clock signal. Requirements for the external clock are listed.

- Clock frequency: 360 kHz to 675 kHz
- Clock maximum voltage amplitude: 13 V
- Clock minimum pulse width: 50 ns
- Clock minimum input logic high: 2 V
- Clock maximum input low: 0.8 V

Power Good (PG)

The power good signal indicates proper operation of the product and can also be used as an error flag indicator. The PG pin is internally pulled up to VIN with 22k Ω resistor. If the output voltage is greater than 108% or lower than 92% of its nominal value. The Power Good signal will be low to indicate that the output voltage is out of regulation.

Soft Start and Output Voltage Tracking (SS/TRK)

Once EN/UVLO pin voltage exceeds 1.2V increasing threshold, the device initiates soft-start process. The soft start time t_{ss} is set by C_{ss} from SS/TRK pin to AGND. A 47nF capacitor is connected internally by default. The total capacitance should be calculated by Equation 3.

$$C_{ss}(nF) = 12.5 * t_{ss}(ms) \quad \text{Equation 3}$$

PNA series PoL Regulators

Input 9-36 V, Output up to 6 A / 33 W

1/28701 - BMR661 Rev. A

April 2021

© Flex


The SS/TRK could also be used as tracking pin when master-slave power supply tracking is required. The function is achieved by dividing output voltage of master device through resistor network R_{TRK1} and R_{TRK2} .

A common application of coincident tracking is shown below. Coincident tracking forces the master and slave channels have the same output voltage ramp rate until the slave voltage reaches its setpoint.

Follow Equation 4 to calculate R_{SET} for other output voltage point between 0.9V and 5.5V.

$$R_{SET} = \frac{8}{V_O - 0.8} (k\Omega)$$

Equation 4

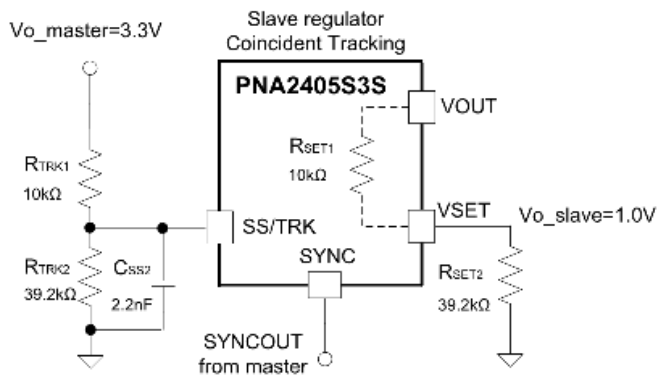

Typical coincident tracking diagram

Simply select same voltage divider for both master and slave devices to implement a coincident tracking. Choose $R_{TRK1}=R_{SET1}$ and $R_{TRK2}=R_{SET2}$. Conversely, different voltage dividers for master and slave implement ratiometric tracking, which sets output voltage of slave to a fraction of master output voltage.

In all cases, ensure the final value of SS/TRK voltage of slave should be at least 0.1V above VSET reference voltage 0.8V.

Output Voltage Setting (VSET)

The products support output voltage setting by connecting resistor R_{SET} between VSET and AGND. Typical output voltages and corresponding R_{SET} values are listed in table below.

V_{OUT} (V)	R_{SET} (kΩ)
0.9	80.6
1.0	39.2
1.8	8.2
2.5	4.7
3.3	3.24
5.0	1.89
5.5	1.71

PNA series PoL Regulators

Input 9-36 V, Output up to 6 A / 33 W

1/28701 - BMR661 Rev. A

April 2021


© Flex

Thermal Consideration**General**

The products are designed to operate in different thermal environments and sufficient cooling must be provided to ensure reliable operation.

For products mounted on a PWB without a heat sink attached, cooling is achieved mainly by conduction, from the pins to the host board, and convection, which is dependent on the airflow across the product. Increased airflow enhances the cooling of the product. The Output Current Derating graph found in the Output section for provides the available output current vs. ambient air temperature and air velocity at $V_i = 24$ V.


The product is tested on a 254 x 254 mm, 35 μ m (1 oz), 8-layer test board mounted vertically in a wind tunnel with a cross-section of 608 x 203 mm.

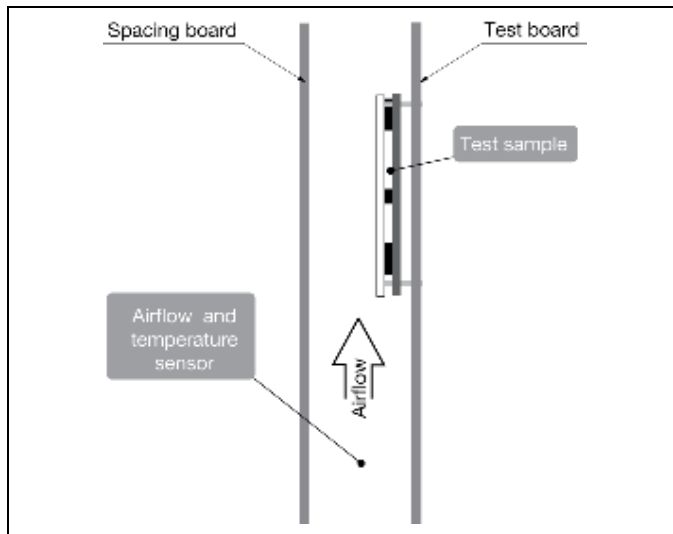**Definition of product operating temperature**

The product operating temperatures is used to monitor the temperature of the product, and proper thermal conditions can be verified by measuring the temperature at positions P1, P2, P3 and P4. The temperature at these positions T_{P1} , T_{P2} , T_{P3} and T_{P4} should not exceed the maximum temperatures in the table below. The number of measurement points may vary with different thermal design and topology. Temperatures above maximum T_{P1} , measured at the reference point P1 are not allowed and may cause permanent damage.

osition	Description	Max Temp.
P1	M1, Inductor, Reference point	$T_{P1}=125$ °C
P2	T1, MOSFET	$T_{P2}=125$ °C
P3	T2, MOSFET	$T_{P3}=125$ °C
P4	N1, Controller	$T_{P4}=125$ °C

Note that the maximum value is the absolute maximum rating and the Electrical Specification is guaranteed up to $T_{ref} +85$ °C.

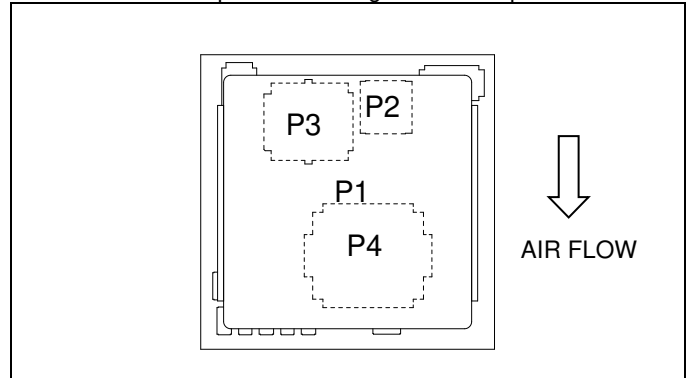**Over Temperature Protection (OTP)**

The internal thermal shutdown circuitry forces the device to stop switching if T_{P4} exceeds 155 °C. The device reinitiates the power up sequence with typical 8°C hysteresis.

Layout recommendations

The radiated EMI performance of the product will depend on the PCB layout and ground layer design. If a ground layer is used, it should be connected to the output of the product and the equipment ground or chassis.

A ground layer will increase the stray capacitance in the PCB and improve the high frequency EMC performance.

Further layout recommendations are listed below.

- Besides the terminals, there are extra pads for production test located at the bottom side of the modules. (see Figure 1 Test Pads) Don't place conductive trace, voids and other pads beneath the module to prevent unexpected short.

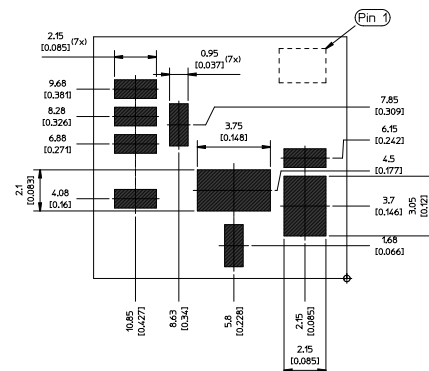


Figure 1 Test pads

PNA series PoL Regulators


Input 9-36 V, Output up to 6 A / 33 W

1/28701 - BMR661 Rev. A

April 2021

© Flex

- Resistors R_{UVH} , R_{UVL} and R_{SET} should be placed as close as possible to their respective pins.
- The capacitors C_{IN} and C_{OUT} should be placed as close as possible to VIN and VOUT pins with low impedance connections.
- Use large copper areas for power planes to minimize conduction loss and thermal stress.
- Keep AGND and PGND separate from one another. The connection is made internally.
- Use multiple via to connect the power planes to internal layers for improved thermal performance.
- Only S+ pin is provided on device. If negative sense resistor is added from PGND to external S- terminal. The sensing connections should be routed as differential pair and preferably between ground planes. Avoid areas of high electric or magnetic fields.

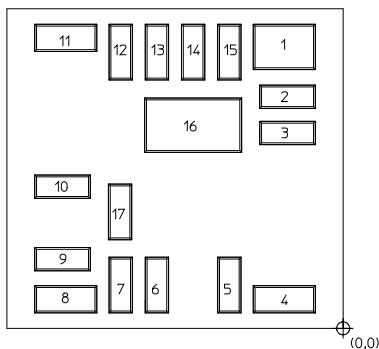Connections**Bottom view**

Pin	Designation	Function
1, 2, 3	VOUT	Output voltage
4	S+	Positive sense
5	EN/UVLO	Remote control and input under voltage lockout threshold setting
6	VSET	Output voltage setting
7	SS/TRK	Soft start and output voltage tracking
8	PG	Power good indicator
9	AGND	Pin strap reference
10, 15, 16	PGND	Power ground
11, 12, 13, 14	VIN	Input voltage
17	SYNC	Synchronization input



PNA series PoL Regulators
Input 9-36 V, Output up to 6 A / 33 W

1/28701 - BMR661 Rev. A



April 2021

© Flex


Mechanical Information - Surface Mount Version with Solder Bumps

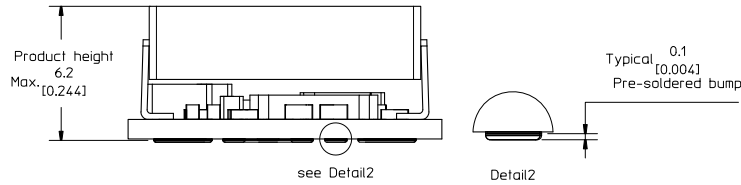

TOP VIEW
Pin positions according to recommended footprint

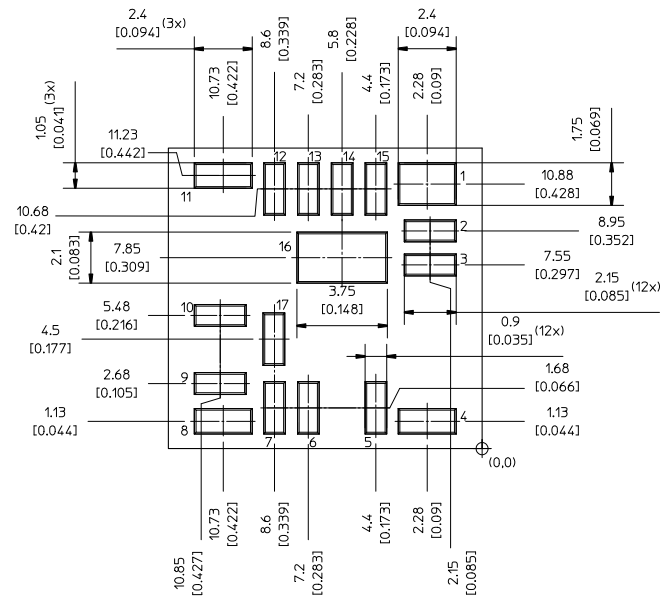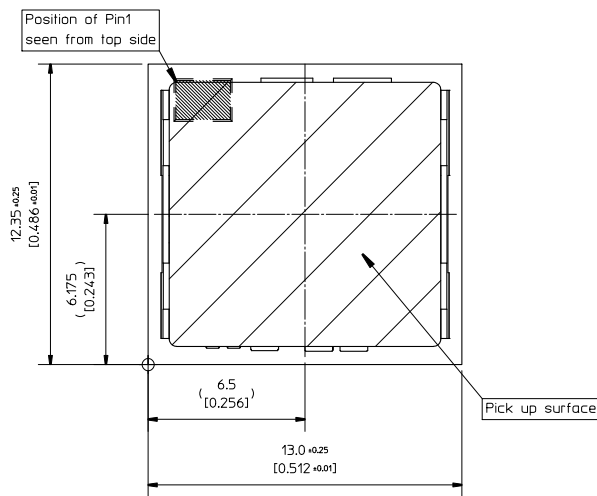

RECOMMENDED FOOTPRINT - TOP VIEW

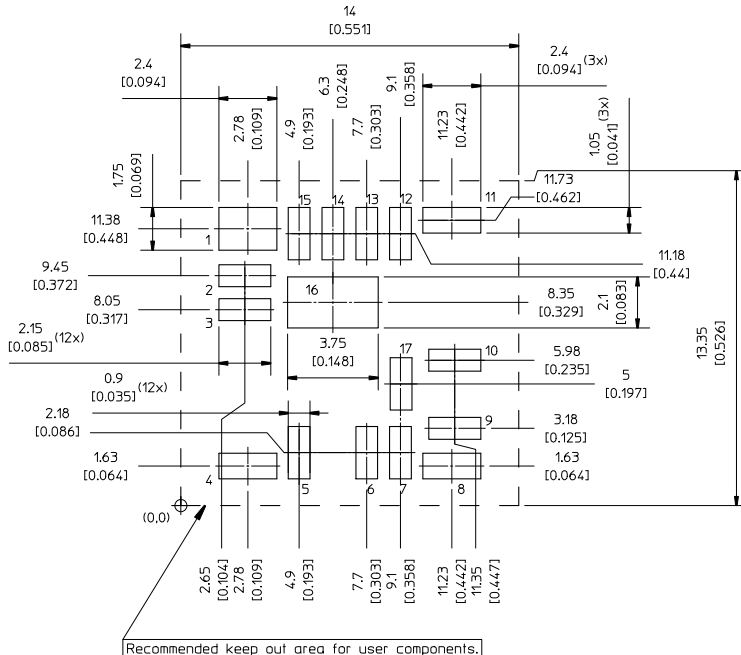

Notes:

Product height: Product height indicate module after soldered.

Material: Solder bumps SAC305

Max pressure on top surface: 30N (TBD)

Weight: Typical TBD

All dimensions in mm [inch]

Tolerances unless specified:

x.x ±0.5 mm [0.02]

x.xx±0.25 mm [0.01]

(not applied on footprint or typical values)



PNA series PoL Regulators

Input 9-36 V, Output up to 6 A / 33 W

1/28701 - BMR661 Rev. A

April 2021

© Flex


Soldering Information - Surface Mounting

The surface mount product is intended for forced convection or vapor phase reflow soldering in SnPb or Pb-free processes.

The reflow profile should be optimised to avoid excessive heating of the product. It is recommended to have a sufficiently extended preheat time to ensure an even temperature across the host PWB and it is also recommended to minimize the time in reflow.

A no-clean flux is recommended to avoid entrapment of cleaning fluids in cavities inside the product or between the product and the host board, since cleaning residues may affect long time reliability and isolation voltage.

General reflow process specifications		SnPb eutectic	Pb-free
Average ramp-up (T_{PRODUCT})		3°C/s max	3°C/s max
Typical solder melting (liquidus) temperature	T_L	183°C	221°C
Minimum reflow time above T_L		60 s	60 s
Minimum pin temperature	T_{PIN}	210°C	235°C
Peak product temperature	T_{PRODUCT}	225°C	260°C
Average ramp-down (T_{PRODUCT})		6°C/s max	6°C/s max
Maximum time 25°C to peak		6 minutes	8 minutes

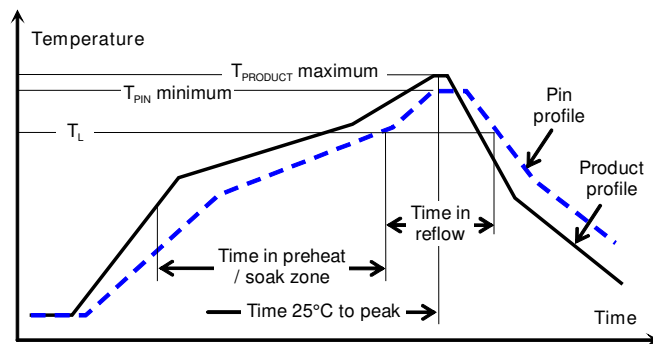**Minimum Pin Temperature Recommendations**

Pin number 16 is chosen as reference location for the minimum pin temperature recommendation since this will likely be the coolest solder joint during the reflow process.

SnPb solder processes

For SnPb solder processes, a pin temperature (T_{PIN}) in excess of the solder melting temperature, (T_L , 183°C for Sn63Pb37) for more than 60 seconds and a peak temperature of 220°C is recommended to ensure a reliable solder joint.

For dry packed products only: depending on the type of solder paste and flux system used on the host board, up to a recommended maximum temperature of 245°C could be used, if the products are kept in a controlled environment (dry pack handling and storage) prior to assembly.

Lead-free (Pb-free) solder processes

For Pb-free solder processes, a pin temperature (T_{PIN}) in excess of the solder melting temperature (T_L , 217 to 221°C for SnAgCu solder alloys) for more than 60 seconds and a peak temperature of 245°C on all solder joints is recommended to ensure a reliable solder joint.

Maximum Product Temperature Requirements

Top of the product PWB near pin 17 is chosen as reference location for the maximum (peak) allowed product temperature (T_{PRODUCT}) since this will likely be the warmest part of the product during the reflow process.

SnPb solder processes

For SnPb solder processes, the product is qualified for MSL 1 according to IPC/JEDEC standard J-STD-020C.

During reflow T_{PRODUCT} must not exceed 225 °C at any time.

Pb-free solder processes


For Pb-free solder processes, the product is qualified for MSL 3 according to IPC/JEDEC standard J-STD-020C.

During reflow T_{PRODUCT} must not exceed 260 °C at any time.

Dry Pack Information

Surface mount versions of the products are delivered in standard moisture barrier bags according to IPC/JEDEC standard J-STD-033 (Handling, packing, shipping and use of moisture/reflow sensitivity surface mount devices).

Using products in high temperature Pb-free soldering processes requires dry pack storage and handling. In case the products have been stored in an uncontrolled environment and no longer can be considered dry, the modules must be baked according to J-STD-033.

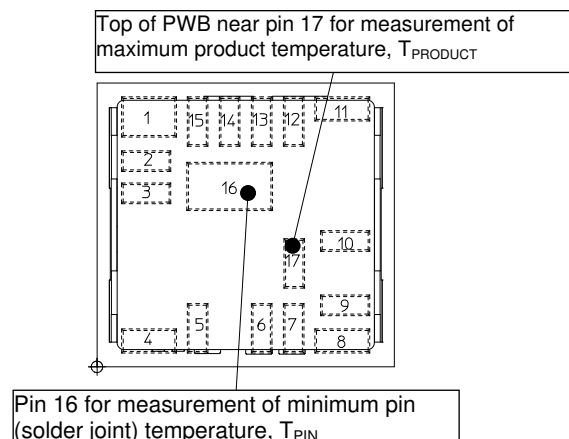Thermocoupler Attachment

PNA series PoL Regulators

Input 9-36 V, Output up to 6 A / 33 W

1/28701 - BMR661 Rev. A

April 2021

© Flex

Surface Mount Assembly

Automatic pick and place equipment should be used to mount the product on the host board. The use of a vision system, utilizing the fiducials on the bottom side of the product, will ensure adequate accuracy. Manual mounting of products is not recommended.

For double-sided assemblies, the solder joints on the topside of the board are inverted and reflowed again. During the second reflow, the module will be held in place by the surface tension, which may prevent the components from falling off under the gravitational force.



According to our test, this module is capable for upside-down second reflow process. It also should be noted that different process configuration might have different performance for upside-down reflow, in that case, gluing might be required to secured the module from falling off.

Delivery Package Information

The products are delivered in antistatic carrier tape (EIA 481 standard).

Carrier Tape Specifications	
Material	Antistatic PS
Surface resistance	$< 10^{11}$ Ohm/square
Bakeability	The tape is not bakable
Tape width, W	24 mm [0.94 inch]
Pocket pitch, P_1	20 mm [0.79 inch]
Pocket depth, K_0	6.9 mm [0.27 inch]
Reel diameter	330 mm [13 inch]
Reel capacity	400 products /reel
Reel weight	1.6 kg/full reel

EIA standard carrier tape

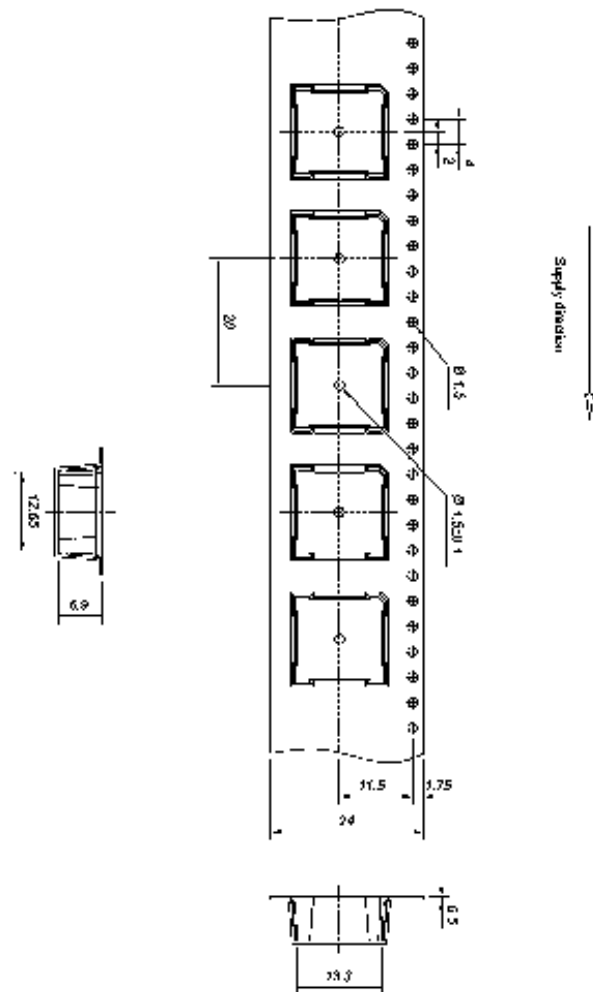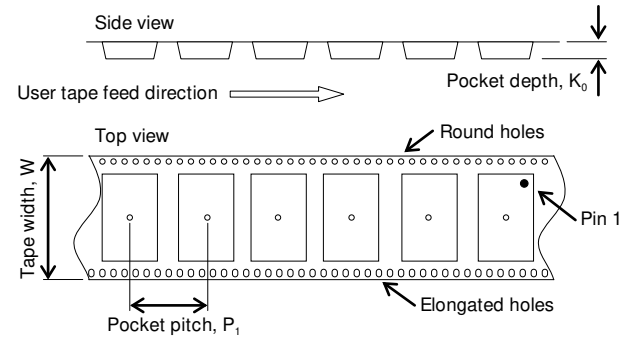

PNA series PoL Regulators
 Input 9-36 V, Output up to 6 A / 33 W

1/28701 - BMR661 Rev. A

April 2021

© Flex

Product Qualification Specification

Characteristics			
External visual inspection	IPC-A-610		
Change of temperature (Temperature cycling)	IEC 60068-2-14 Na	Temperature range Number of cycles Dwell/transfer time	-40 to 100°C 1000 15 min/0-1 min
Cold (in operation)	IEC 60068-2-1 Ad	Temperature T _A Duration	-45°C 72 h
Damp heat	IEC 60068-2-67 Cy	Temperature Humidity Duration	85°C 85 % RH 1000 hours
Dry heat	IEC 60068-2-2 Bd	Temperature Duration	125°C 1000 h
Electrostatic discharge susceptibility	IEC 61340-3-1, JESD 22-A114 IEC 61340-3-2, JESD 22-A115	Human body model (HBM) Machine Model (MM)	Class 2, 2000 V Class 3, 200 V
Immersion in cleaning solvents	IEC 60068-2-45 XA, method 2	Water Glycol ether {Isopropyl alcohol}	55°C 35°C {35°C}
Mechanical shock	IEC 60068-2-27 Ea	Peak acceleration Duration	100 g 6 ms
Moisture reflow sensitivity ¹	J-STD-020E	Level 1 (SnPb-eutectic) Level 3 (Pb Free)	225°C 260°C
Operational life test	MIL-STD-202G, method 108A	Duration	1000 h
Robustness of terminations	IEC 60068-2-21 Test Ua1 IEC 60068-2-21 Test Ue1	Through hole mount products Surface mount products	All leads All leads
Solderability	IEC 60068-2-58 test Td ¹	Preconditioning Temperature, SnPb Eutectic Temperature, Pb-free	150°C dry bake 16 h 215°C 235°C
Vibration, broad band random	IEC 60068-2-64 Fh, method 1	Frequency Spectral density Duration	10 to 500 Hz 0.07 g ² /Hz 10 min in each direction

Notes
¹ Only for products intended for reflow soldering (surface mount products)