

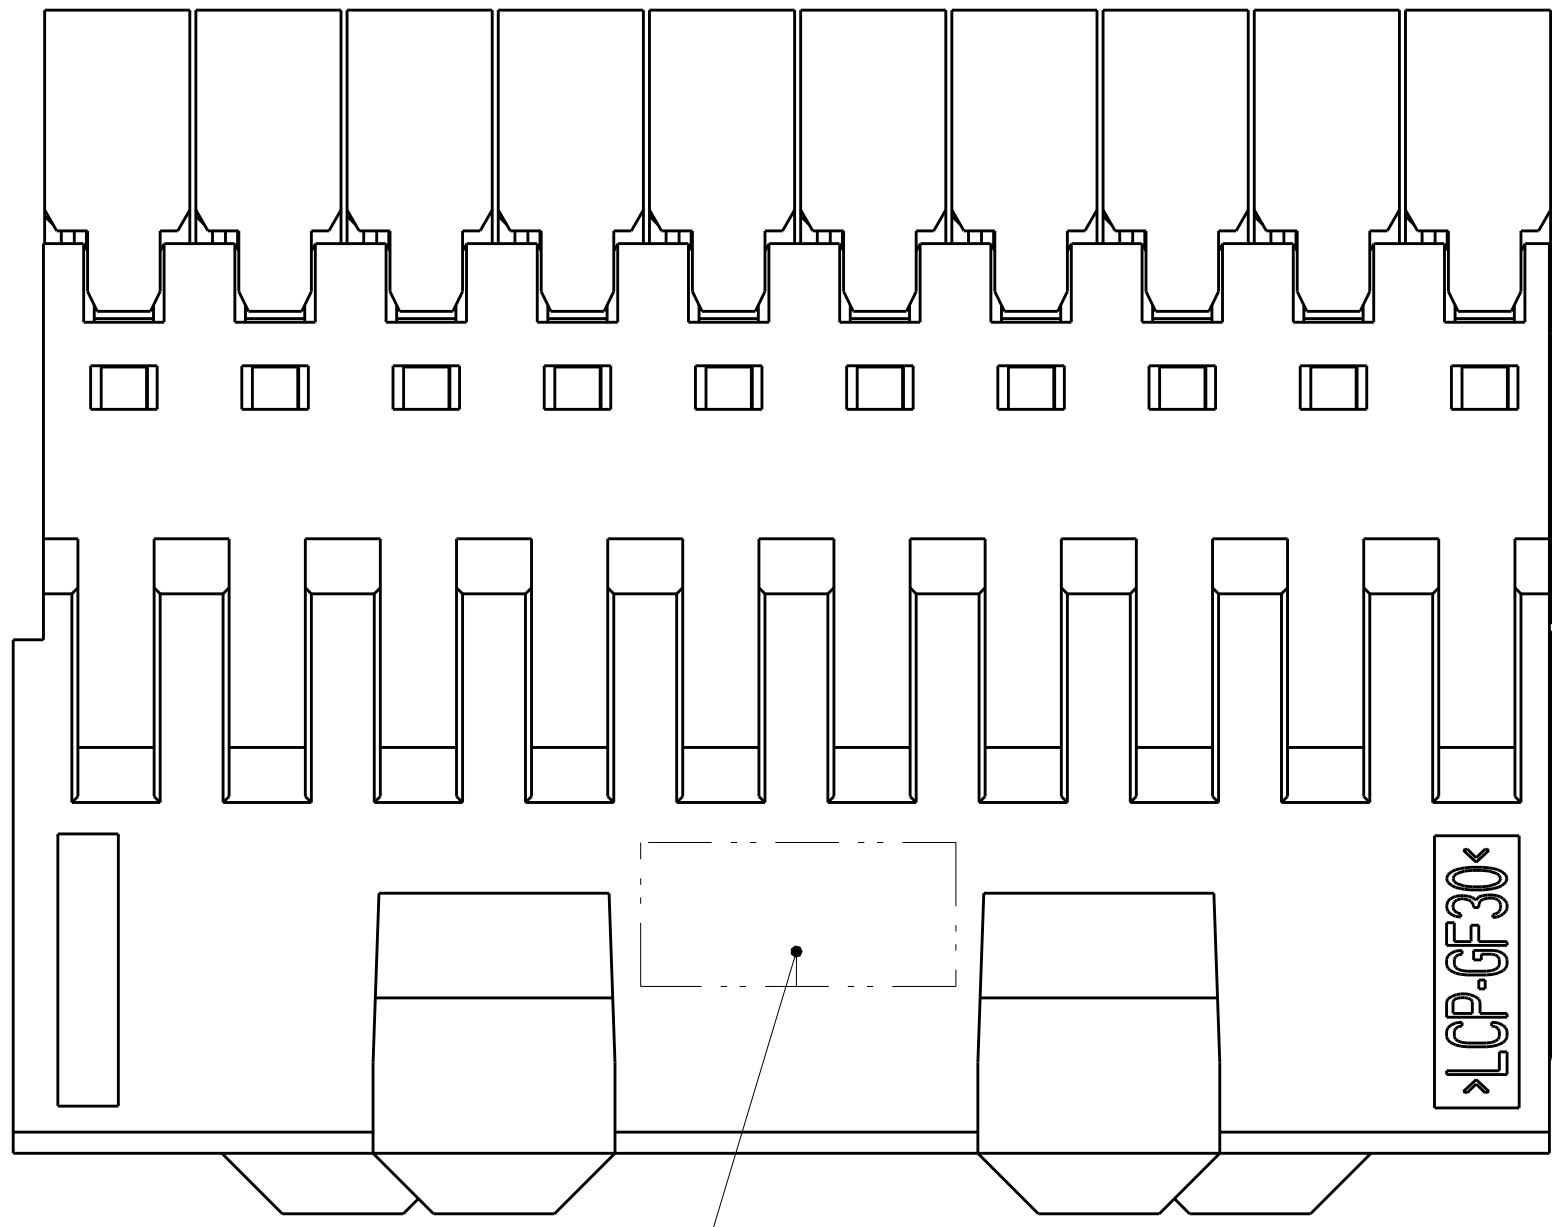
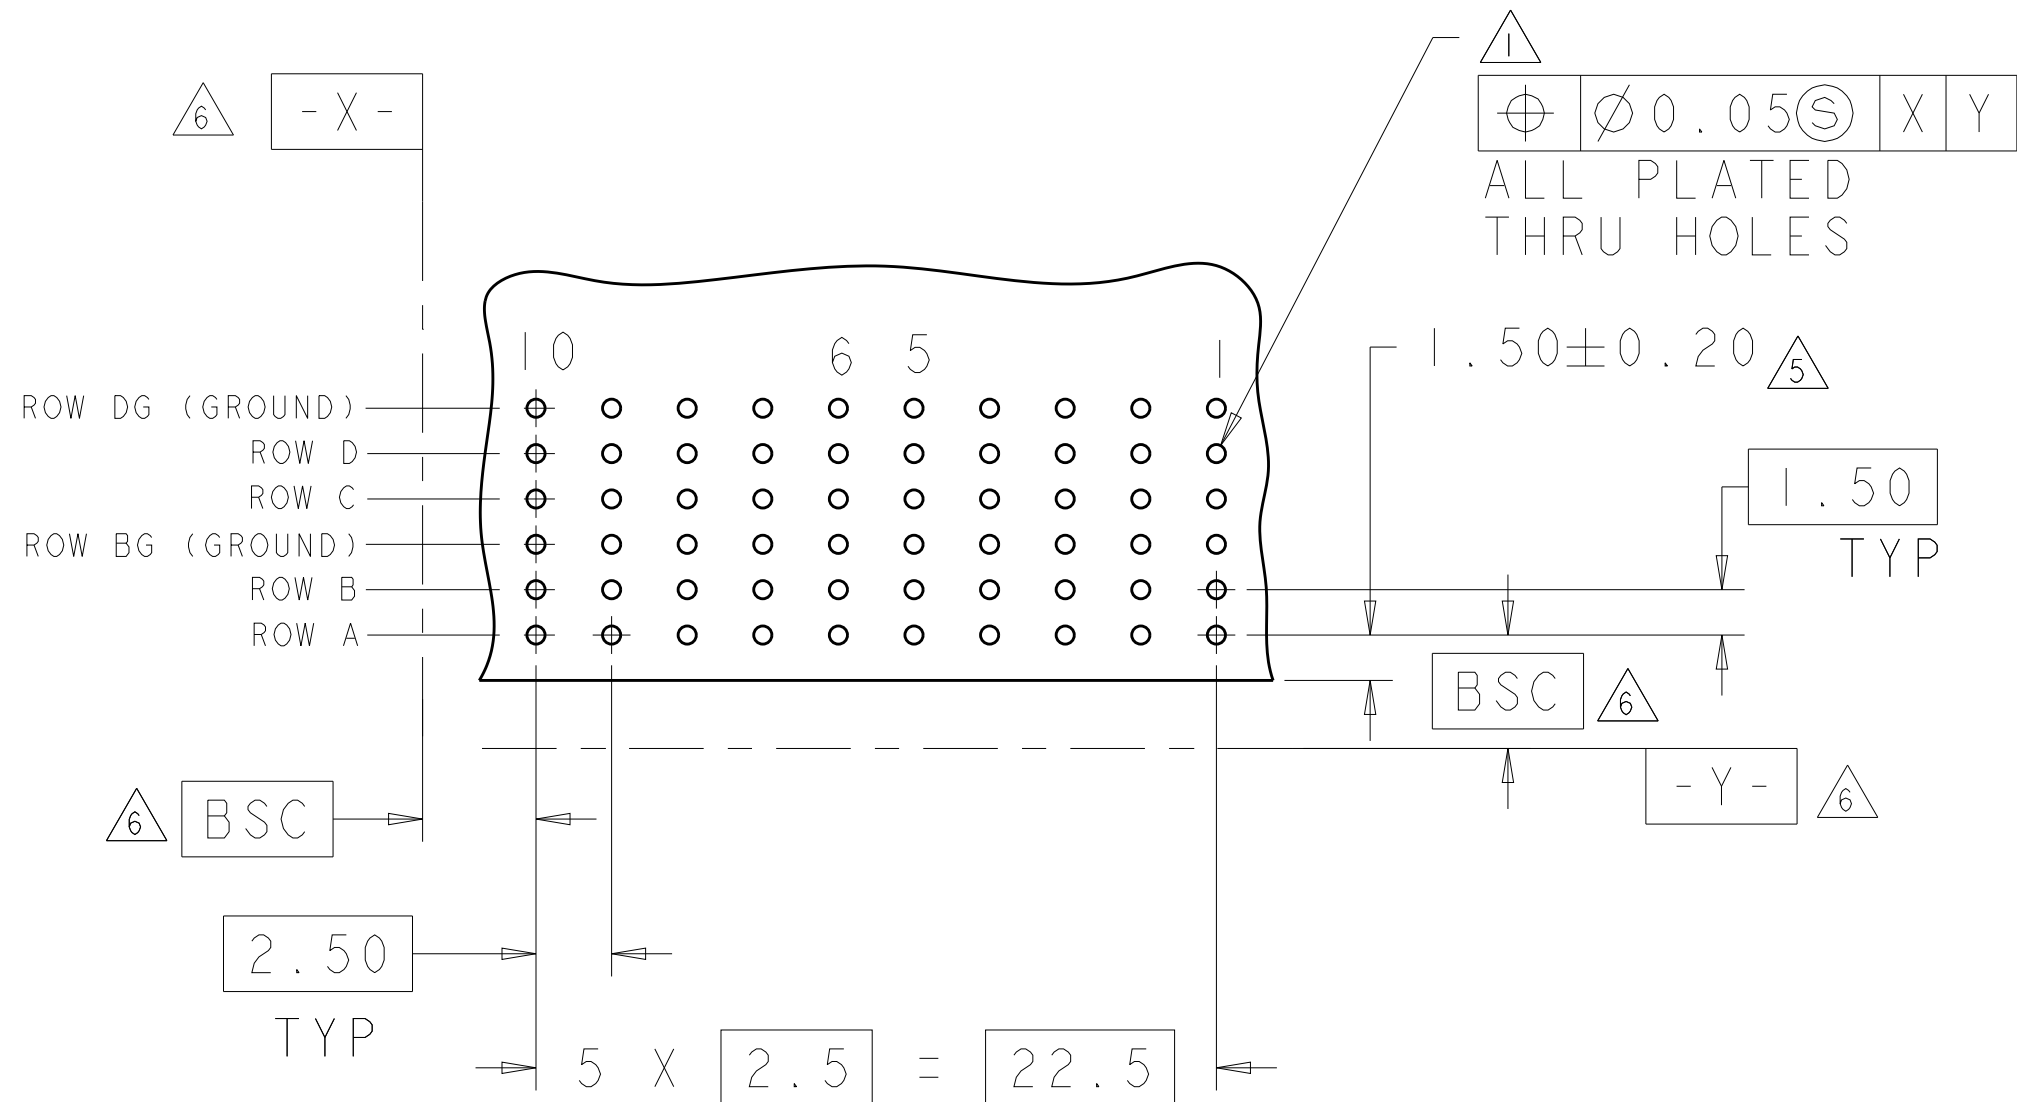
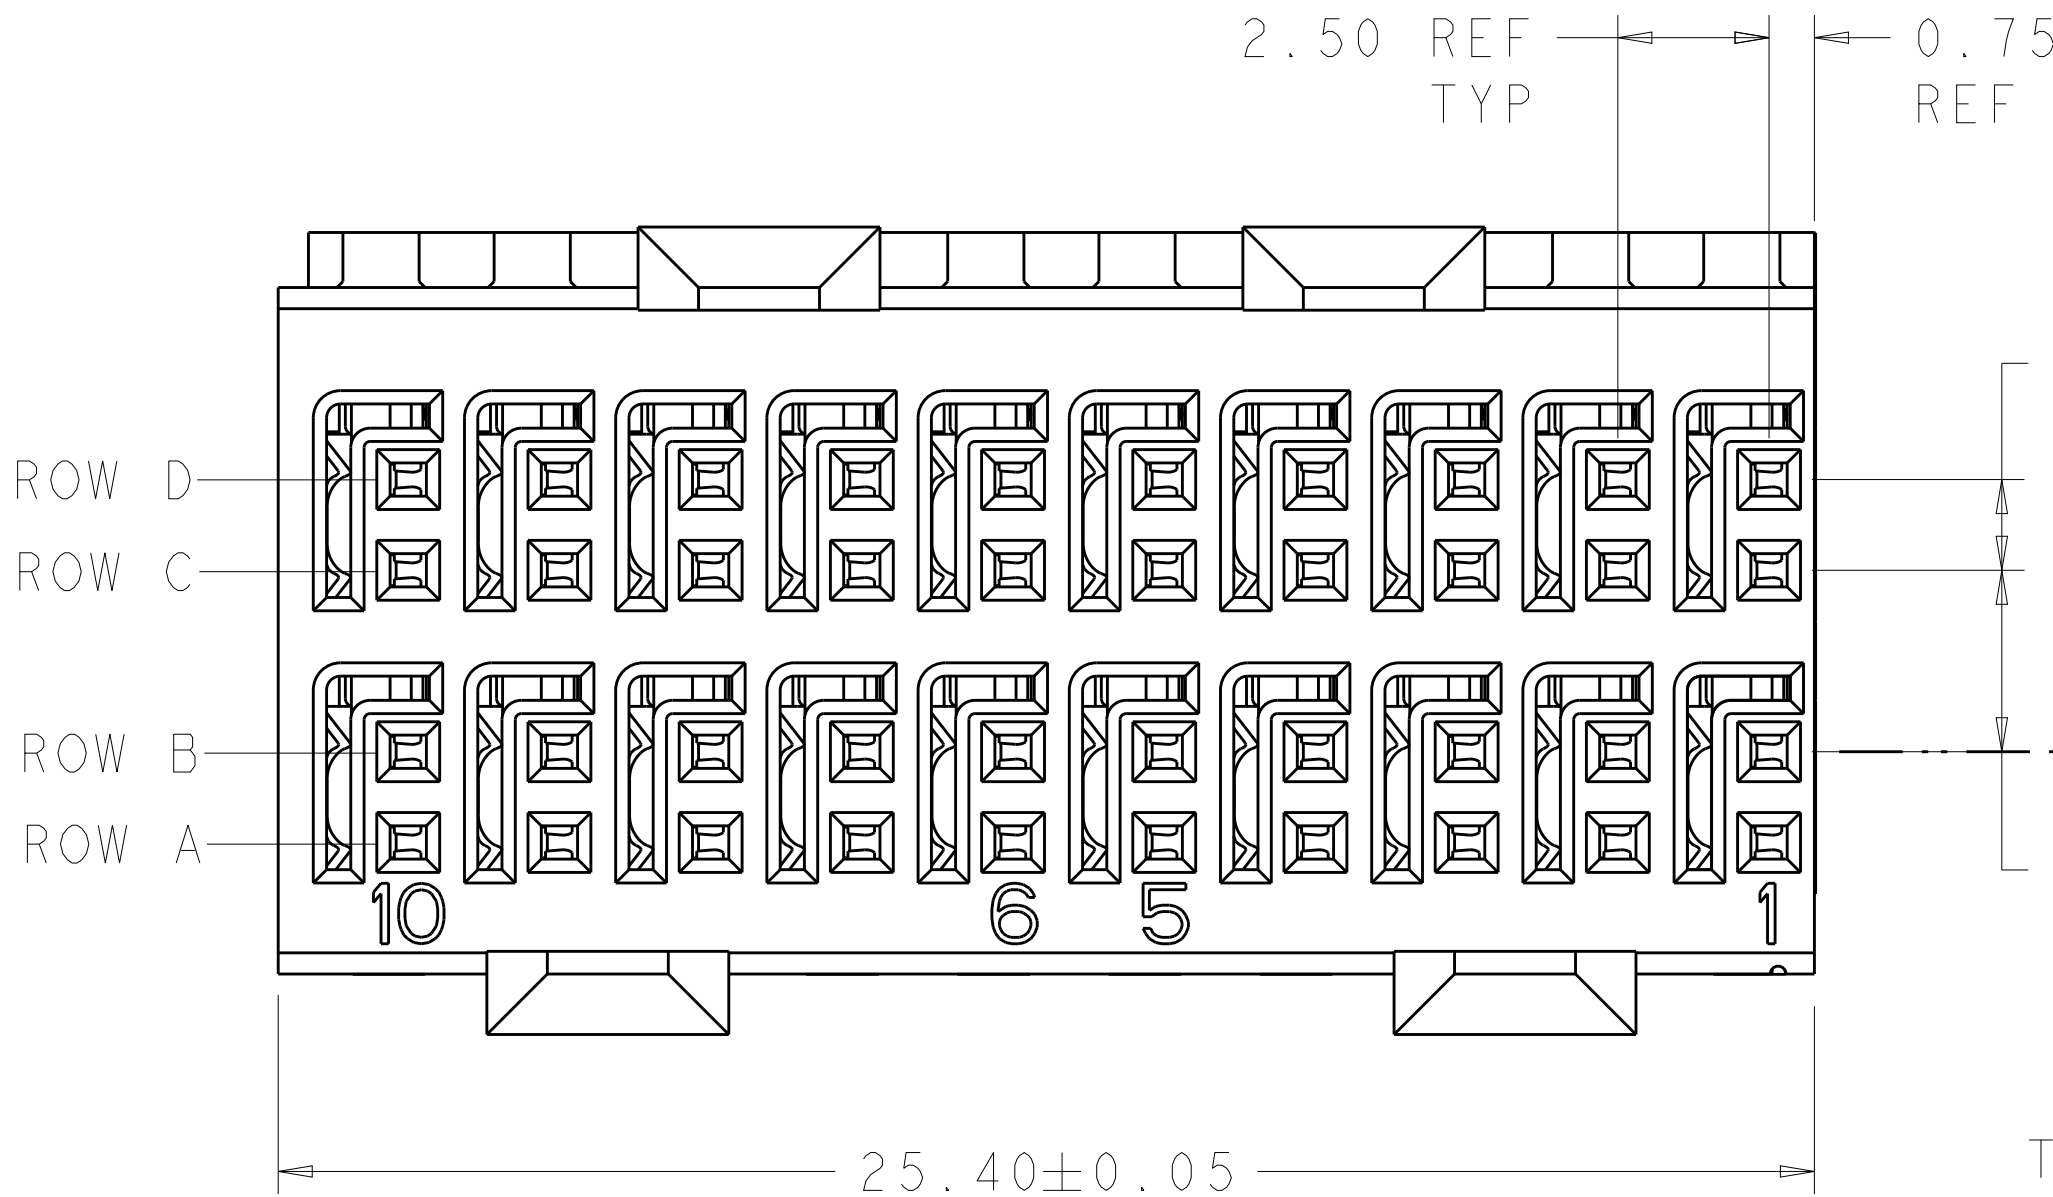


LOC		DIST		REVISONS			
AD	00	P	LTR	DESCRIPTION	DATE	DWN	APVD
		A		REV PER ECO-11-007577	13APR2011	RKC	JE
		B		REVISED PER ECO-16-008845	17SEP2016	AP	RP
		C		REVISED PER ECO-17-006073	05JUN2017	AP	RP

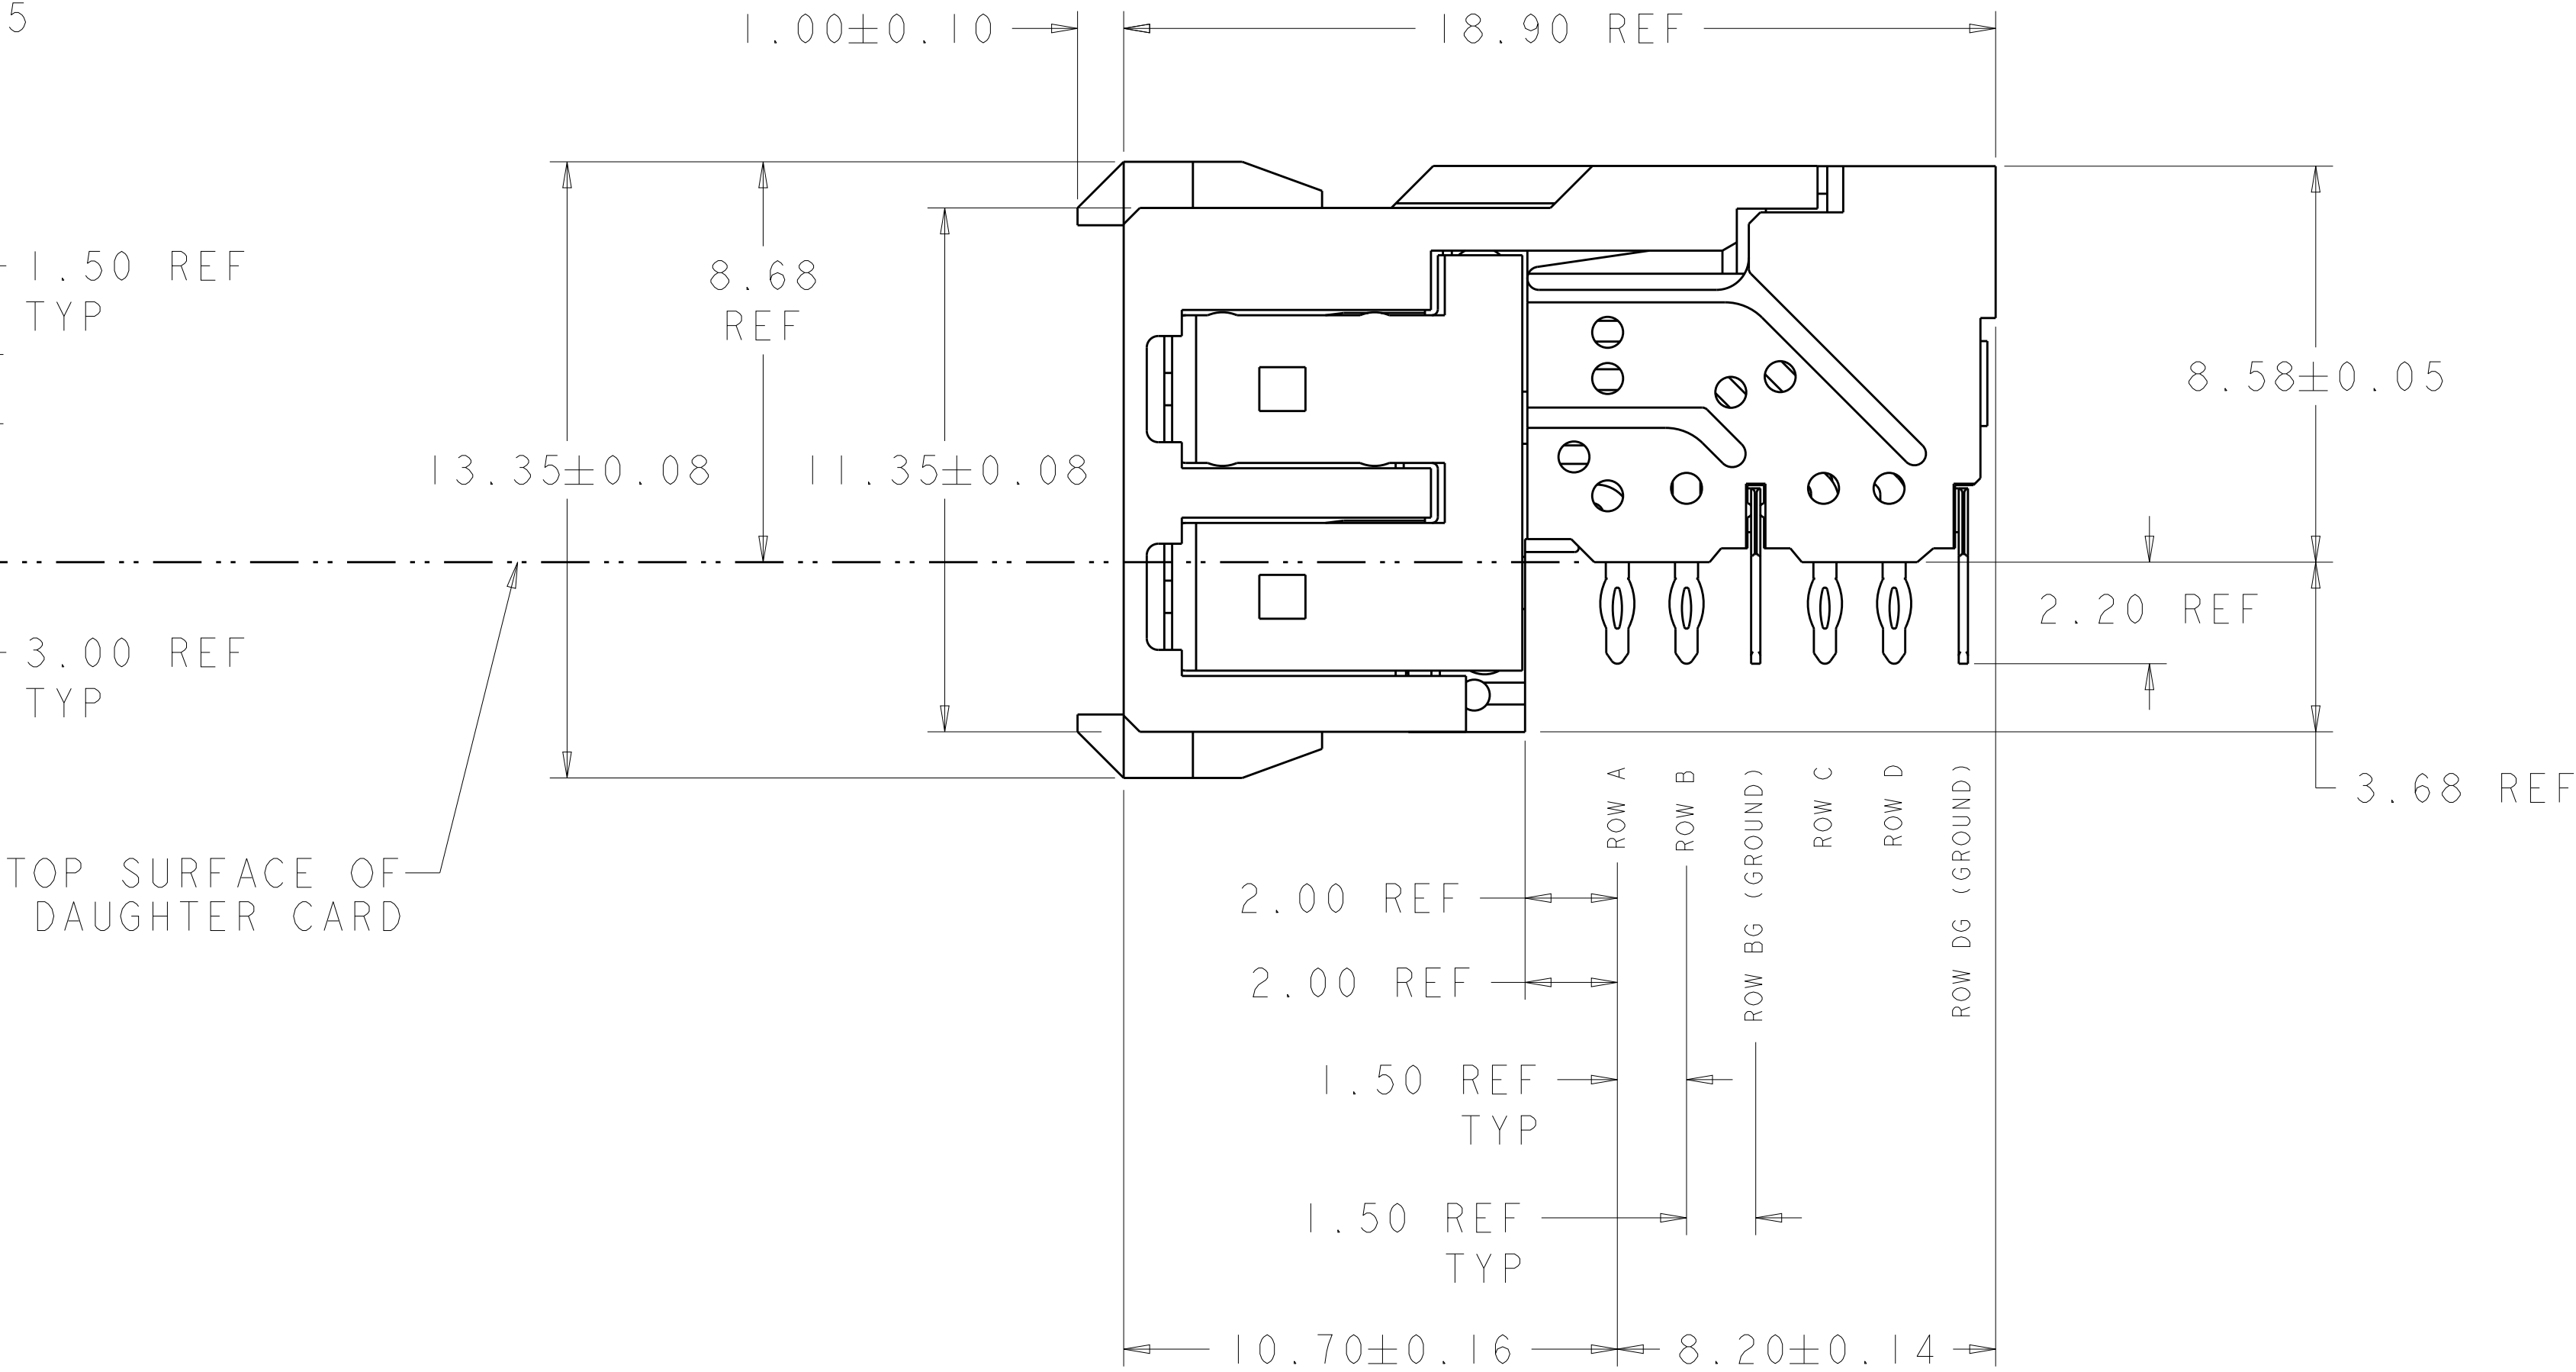

- REFERENCE APPLICATION SPEC 114-13059 FOR RECOMMENDED PLATED THRU HOLE DIAMETER AND PLATING THICKNESSES.
- MATERIAL:
SHIELD - PHOSPHOR BRONZE
CONTACT - COPPER-NICKEL-SILICON
HOUSING, CHICKLET AND CHICKLET COVER - GLASS FILLED POLYESTER
- FINISH: SIGNAL AND GROUND CONTACTS:
MATING AREA: MEETS THE PERFORMANCE REQUIREMENTS OF PRODUCT SPECIFICATION 108-2055; BASED ON TELCORDIA GR-1217-CORE, APPLICATIONS IN UNCONTROLLED ENVIRONMENTS
COMPLIANT PIN AREA: 0.5 μ m MIN MATTE TIN OVER BASE PLATING
- CONNECTOR MARKED WITH PART NUMBER AND DATE CODE IN APPROXIMATE AREA SHOWN
- DIMENSION APPLIES TO CENTERLINE OF THRU HOLE.
- DATUMS AND BASIC DIMENSIONS ESTABLISHED BY CUSTOMER.
7. CONTACT AREA LUBRICATED WITH BELLCORE APPROVED LUBRICANT. TECHNICAL REFERENCE: GR-1217-CORE, ISSUE 1, NOVEMBER 1995.

RECOMMENDED PC BOARD LAYOUT, DAUGHTER BOARD, COMPONENT SIDE SHOWN
SCALE 4:1

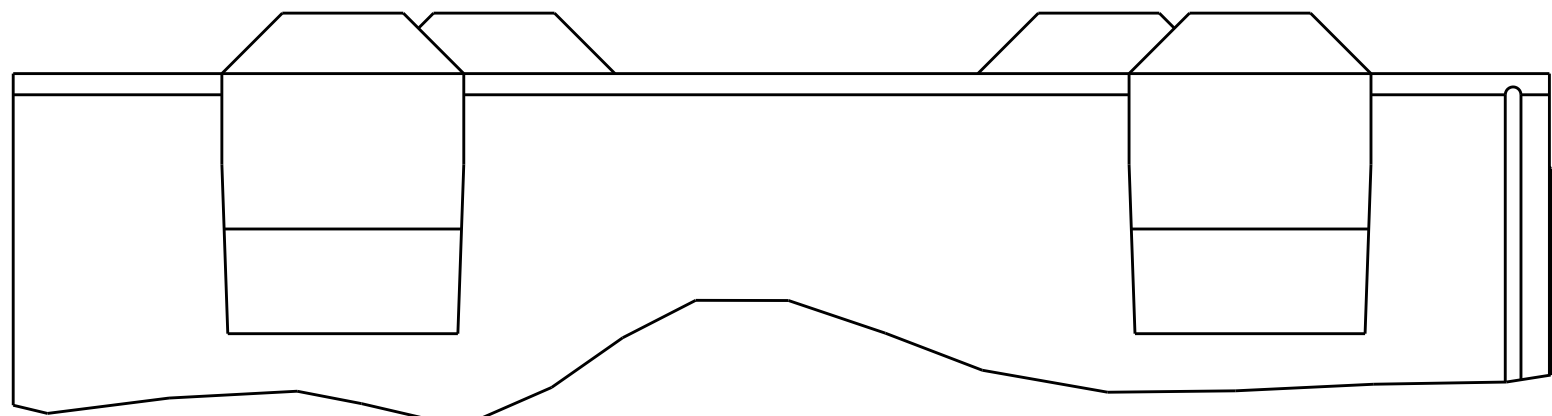

6469632-1
PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN S.J.MAGARO 04MAR2005	TE Connectivity	
DIMENSIONS:		CHK R.A.PATTERSON 04MAR2005		
mm	TOLERANCES UNLESS OTHERWISE SPECIFIED:	APVD -	NAME	RECEPTACLE ASSEMBLY, 2 PAIR, 25mm, HMZd
	0 PLC ±°	PRODUCT SPEC	SIZE	100779
	1 PLC ±°	APPLICATION SPEC	CAGE CODE	6469632
	2 PLC ±°	WEIGHT	DRAWING NO	8:1
	3 PLC ±°	CUSTOMER DRAWING	SHEET	1
	4 PLC ±°		OF	1
MATERIAL	FINISH		REV	C