THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION DEC ,2005.
© COPYRIGHT 2005 TE Connectivity Ltd. ALL RIGHTS RESERVED.

REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	D	ECR-19-007148	15MAY2019	RZ	RS

NOTES:

1. PACK IN ACCORDANCE WITH AMP SPEC 107-3275
2. 100 TRAY PACK IN ACCORDANCE WITH AMP SPEC 107-3275
3. Ag PLATING

4 ELECTRICAL CHARACTERISTICS


FREQUENCY RANGE:	DC – 4 GHz
NOMINAL IMPEDANCE:	50 Ohm
INSULATION RESISTANCE:	5000 MOhm
WORKING VOLTAGE:	500 Volts RMS at Sea Level
DIELECTRIC WITHSTAND VOLTAGE:	1500 Volts RMS Max
CONTACT RESISTANCE:	
CENTRE CONTACT:	1.50 mOhm Max
OUTER CONTACT:	0.20 mOhm Max
VSWR @ xGHz:	N/A
INSERTION LOSS xdb:	N/A


5 MECHANICAL CHARATERISTICS

COUPLING RETENTION FORCE:	N/A
CABLE RETENETION FORCE:	N/A
MOUNT NUT RECOMMENDED TORQUE:	2.5N
DURABILITY:	500 Cycles Min

6 ENVIRONMENTAL CHARACTERISTICS

OPERATING TEMPERATURE:	–65 to +165 DegC

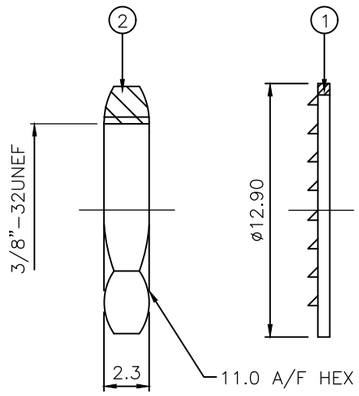

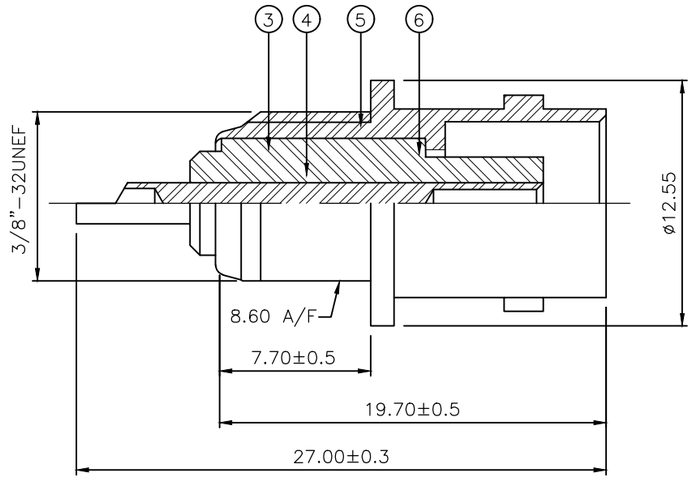

		1	1	PTFE	INSULATION	6
		1	1	BRASS ③	BODY	5
		1	1	BRASS ③	CONTACT	4
		1	1	PTFE	INSULATION	3
		1	1	BRASS ③	HEX NUT	2
		1	1	STEEL ③	LOCKWASHER	1
		6--0	1--0	MATERIAL	DESCRIPTION	ITEM
		②	①			
QUANTITY PER ASSY				PARTS LIST		

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: mm

TOLERANCES UNLESS OTHERWISE SPECIFIED:

0 PLC	± –
1 PLC	± 0.2
2 PLC	± 0.1
3 PLC	± –
4 PLC	± –
ANGLES	± –

MATERIAL: SEE TABLE

FINISH: –

DWN	J.SANDWELL 13DEC05
CHK	S.PARLOW 13DEC05
APVD	F.WHEELER-KING 13DEC05
PRODUCT SPEC	–
APPLICATION SPEC	–
WEIGHT	0.000000

TE Connectivity

NAME: BNC BULKHEAD SOCKET FRONT MOUNT 50 OHM LESS SOLDER TAG

–

SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A3	00779	C-1337451	–

CUSTOMER DRAWING

SCALE	SHEET	REV
NTS	1 OF 1	D