

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION 20
© COPYRIGHT 20 BY - ALL RIGHTS RESERVED.

REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
	A	INITIAL	11MAY2015	DW	CW
	A1	ECR-17-018349	14DEC2017	DW	CW

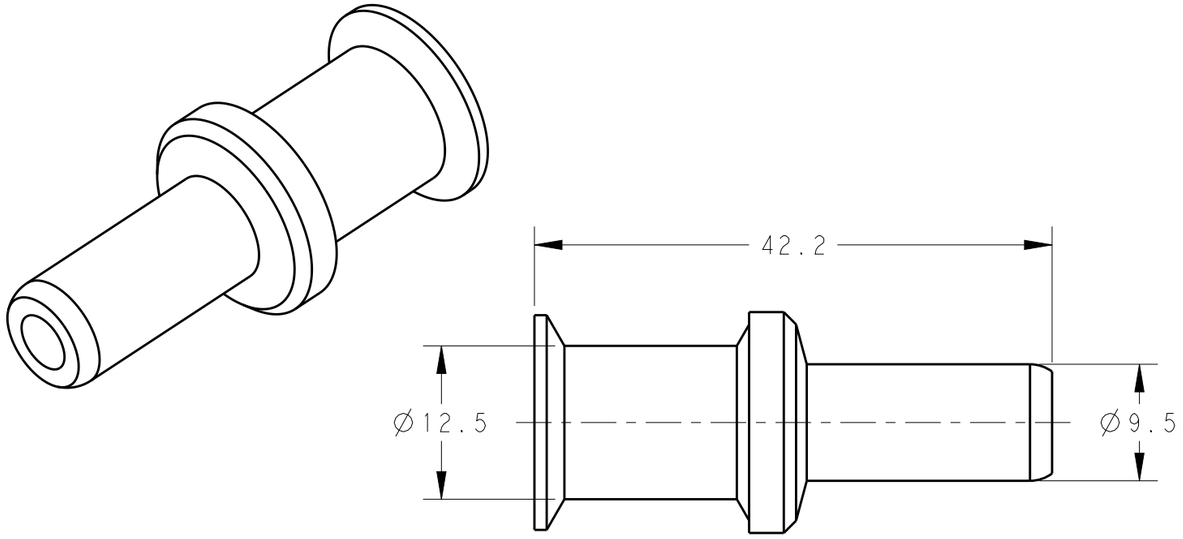



NOTES:
1. TECHNICAL CHARACTERISTICS:
   CONTACT MATERIAL: BRASS
   SURFACE PLATING:
   SILVER PLATING: >=2μm
   CONTACT RESISTANCE: <=0.5mΩ
   WIRE RANGE: 35 mm^2
   OPERATION TEMPERATURE: -40~+125°C

注释：
1. 技术参数：
   公针材料： 黄铜
   表面电镀：
   镀银： >=2μm
   接触电阻： <=0.5mΩ
   接线范围： 35 mm^2
   工作温度： -40~+125°C

T2060001035-000	CHM-35	CHM-35,SILVER PLATING HMN-001公针 35mm^2,镀银	35	20
PART NUMBER 料 号	PART DESCRIPTION 描 述		WIRE GAUGE (mm^2) 线规 (mm^2)	STRIPPING LENGTH (mm) 剥线长度 (mm)

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: mm

TOLERANCES UNLESS OTHERWISE SPECIFIED:
0 PLC ±-
1 PLC ±-
2 PLC ±-
3 PLC ±-
4 PLC ±-
ANGLES ±-

MATERIAL: - / -

FINISH: - / -

DWN David Wang 11MAY2015
CHK Chris Wang 11MAY2015
APVD Xiang Xu 11MAY2015

PRODUCT SPEC: 108-137057
APPLICATION SPEC: 114-137057
WEIGHT: -

TE Connectivity

NAME: CHM-35 HM PIN CONTACT

SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A3	00779	C-T2060001035000	-

Customer Drawing | SCALE 2:1 | SHEET 1 OF 1 | REV A1