
THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
© COPYRIGHT – By – ALL RIGHTS RESERVED.


LOC	DIST
H	—

REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
	C1	ECR-13-012380	06AUG2013	RC	SS

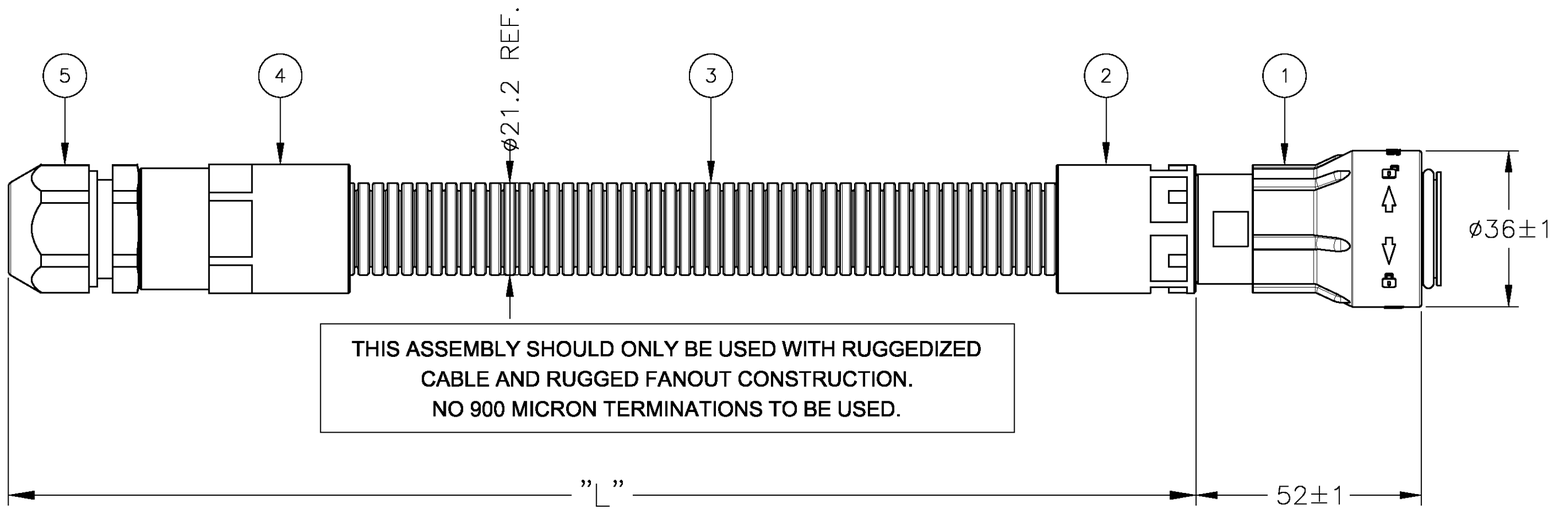

1 EXAMPLE INSTRUCTION SHEET:

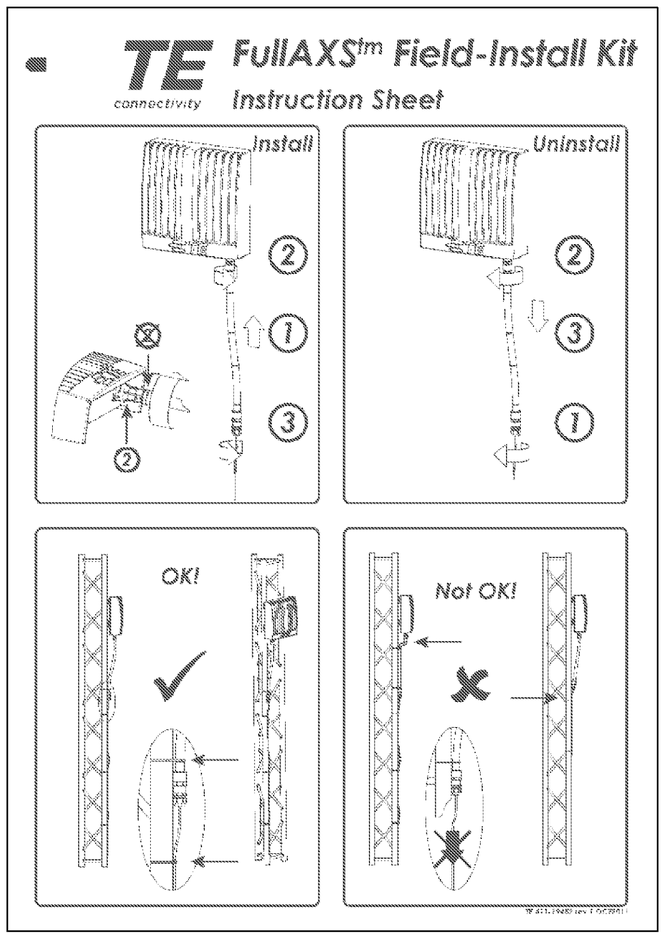

NOTES:

1 EACH FULLAXS FIELD-INSTALL KIT IS PACKED IN A PROTECTION SLEEVE WITH THE INSTRUCTION SHEET SHOWN

2 PACKED PER 40 ASSEMBLIES IN A BOX

PART NUMBER	"L" (meter)	CABLE DIAMETER
2061664-1	0.5 ±0.02	5.0-9.0 mm
2061664-2	0.3 ±0.02	5.0-9.0 mm
2061664-3	0.5 ±0.02	4.5-6.5 mm
2061664-4	0.3 ±0.02	4.5-6.5 mm
2061664-5	0.14 ±0.02	4.5-6.5 mm
2061664-6	0.35 ±0.01	4.5-6.5 mm
2061664-7	0.40 ±0.02	4.5-6.5 mm

Qty	Description	Item
1	FOAC CABLE GLAND PG16	5
1	FOAC CABLE CONDUIT ADAPTER, PG16 INSIDE THREADED, BLACK	4
1	FOAC CABLE CONDUIT, OUTSIDE DIAMETER 21.2 mm, BLACK	3
1	FOAC CABLE CONDUIT ADAPTER, PG16 OUTSIDE THREADED, BLACK	2
1	FOAC FULLAXS™ FIELD INSTALL COUPLING	1

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN R. COOLEN 21MAR2012
CHK S. BORGAS 22MAR2012
APVD A. HENGELMOLEN 22MAR2012

TE Connectivity

DIMENSIONS: mm

TOLERANCES UNLESS OTHERWISE SPECIFIED:
0 PLC ± –
1 PLC ± –
2 PLC ± –
3 PLC ± –
4 PLC ± –
ANGLES ± –

PRODUCT SPEC —
APPLICATION SPEC —
WEIGHT —

NAME: FIBER OPTIC FIELD INSTALL ASSEMBLY

MATERIAL –
FINISH –

SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A2	00779	C-2061664	—

CUSTOMER DRAWING | SCALE NTS | SHEET 1 OF 1 | REV C1

2061664