


REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	F	REVISED PER ECR-23-181664	27JUN2023	SA	DSC

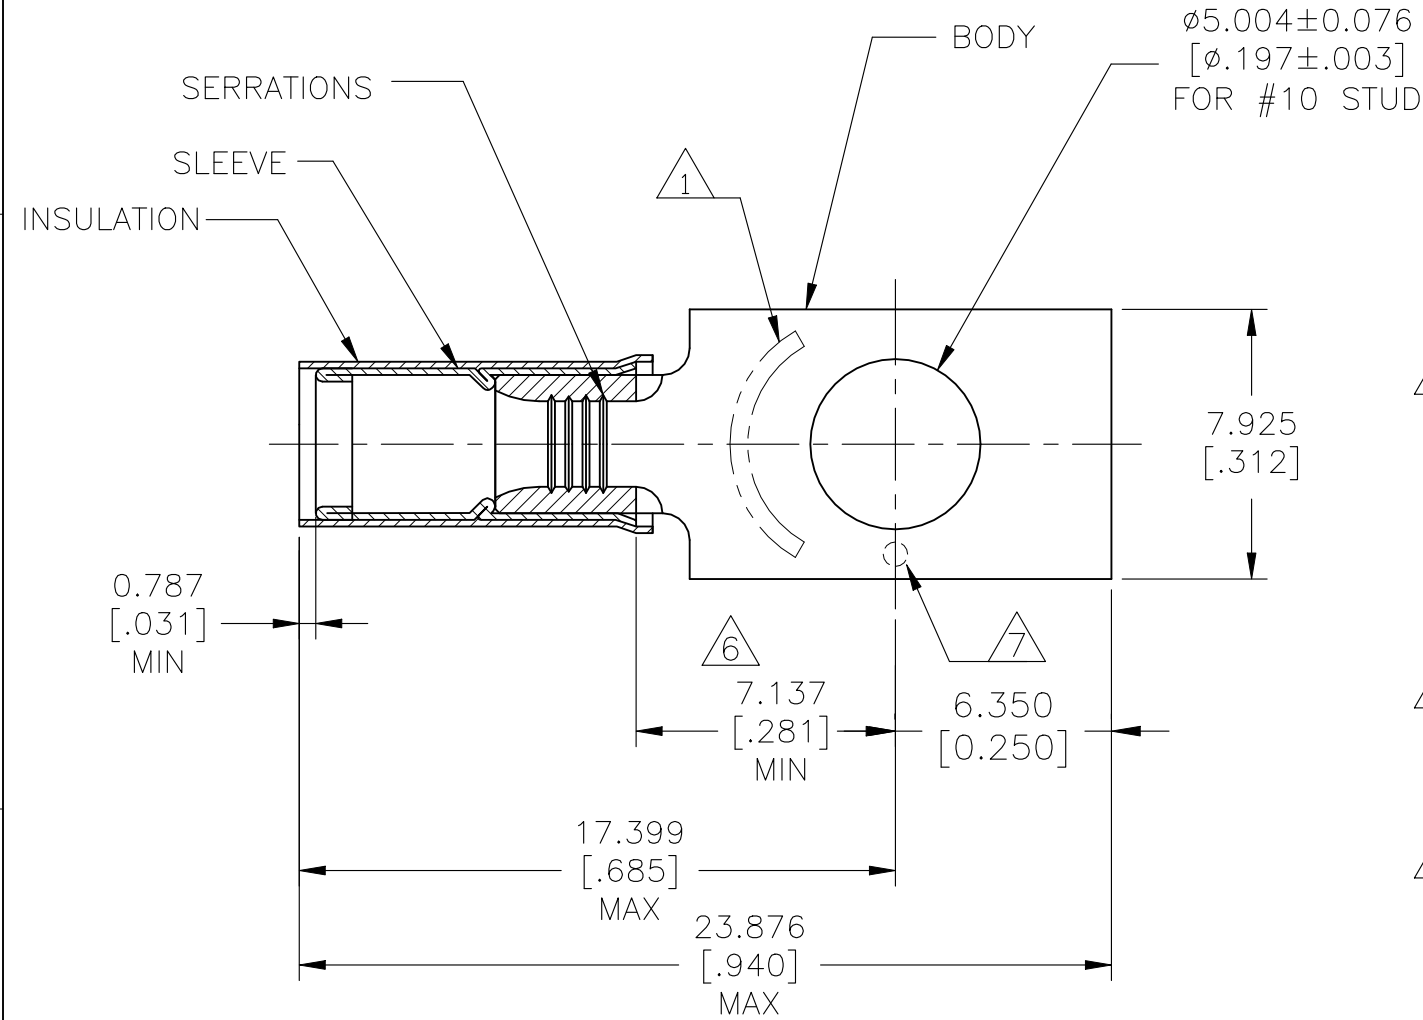

AMP WIRE RANGE	Listed FILE E13288	LR7189 Certified
16-14 AWG SOLID OR STRANDED	16-14 AWG SOLID OR STRANDED	16-14 AWG SOLID OR STRANDED

1. STAMP AMP 16-14* APPROX AS SHOWN
2. WIRE INSULATION DIAMETER:
Ø2.921[.115] TO Ø4.318[.170]
3. BODY MATERIAL THK: 0.787±0.051[.031±.002]
4. MATERIAL:
BODY & SLEEVE – COPPER PER ASTM B152
INSULATION – NYLON
5. FINISH:
BODY & SLEEVE – TIN PLATE 0.00254[.000100] MIN EXT THK PER ASTM B545
INSULATION COLOR – BLUE
6. APPLIES FROM EDGE OF METAL WIRE BARREL TO CENTER OF STUD HOLE
7. DIMPLE STAMP MARK OPTIONAL

1000	LOOSE PIECE	324603
QUANTITY	DESCRIPTION	PART NO

AMP INCORPORATED CUSTOMER SERVICE SYSTEMS		MAX RECOMMENDED OPERATING TEMPERATURE: 105°C [221°F]	THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN 27JUN2023 SANTOSHACHAR S	TE Connectivity			
FOR ADDITIONAL PRODUCT INFORMATION OR COPIES OF DRAWINGS AND TECHNICAL DOCUMENTS	PRODUCT INFORMATION CENTER 1-800-522-6752	VOLTAGE RATING: 300 V MAX	DIMENSIONS: mm [INCHES]	TOLERANCES UNLESS OTHERWISE SPECIFIED:	CHK 27JUN2023 SUVARNA CHETHAN D	NAME TERMINAL, RECTANGULAR TONGUE, PIDG, WIRE SIZE: 16-14 AWG			
FOR APPLICATION TOOLING INFORMATION	TOOLING ASSISTANCE CENTER 1-800-722-1111	WIRE CROSS SECTIONAL AREA RANGE: 1.04-2.62mm²[2050-5180] CIR MILS SOLID OR STRANDED		0 PLC ± - 1 PLC ± - 2 PLC ± - 3 PLC ± 0.127[.005] 4 PLC ± - ANGLES ± -	APVD 27JUN2023 SUVARNA CHETHAN D				
FOR ORDER ENTRY	1-800-526-5142	THIS DRAWING IS A CONTROLLED DOCUMENT FOR AMP INCORPORATED. IT IS SUBJECT TO CHANGE AND THE CONTROLLING ENGINEERING ORGANIZATION SHOULD BE CONTACTED FOR THE LATEST REVISION	MATERIAL 4	FINISH 5	PRODUCT SPEC -	SIZE A3	CAGE CODE 00779	DRAWING NO C-324603	RESTRICTED TO -
CUSTOMER DRAWING					APPLICATION SPEC -	WEIGHT -	SCALE 1:1	SHEET 1 OF 1	REV F