
Pomona ELECTRONICS

Technical Data Sheet

Model 6713
Adapter Push-on Plug Jack (F/M)



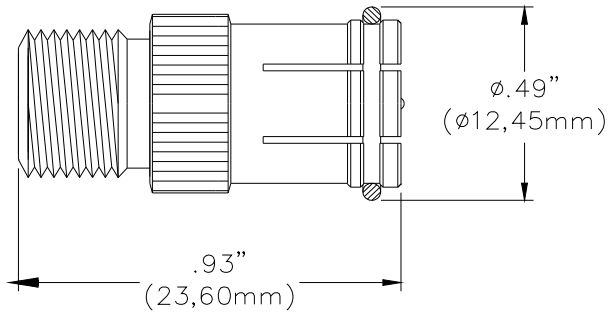

Features:

- The adapter attaches to cables with male F style connector, which then allows the cable to simply slip on and off, quickly and reliably to female F connectors.
- The "push-on" adapter is ideal for testing and manufacturing environments.
- Adapter is precision machined (not die-cast) from brass.

Materials:

Connector Body: Nickel plated brass
Center Contact: Nickel plated brass
Insulator (F): Polystyrene
Insulator (M): Polybutylene Terephthalate

Ratings:

Impedance:	75 Ohms	
Frequency:	0 to 500 MHz	
VSWR:	1.5 max	
Contact Resistance:	3 Milliohms max.	
Max Voltage	* 500 V	
Insulation Resistance:	5,000 Megohms min.	
Insertions:	500	
Temperature:	-40 to +65 C	
* *Hands free testing* in controlled voltage environment: *For CE compliance:* not intended for hand held use at voltages above 33 Vrms / 70 Vdc.		

USA: Sales: 800-490-2361 Technical Support: 800-241-2060 Fax: 888-403-3360
Europe: 31-(0) 40 2675 150 **International**: 425-446-5500
e-mail: technicalsupport@pomonatest.com
Where to Buy: www.pomonaelectronics.com

All dimensions are in inches. Tolerances (except noted): .xx = ±.02" (,51 mm), .xxx = ± .005" (,127 mm). All specifications are to the latest revisions. Specifications are subject to change without notice. Registered trademarks are the property of their respective companies.

Copyright © 2004 11/2004