

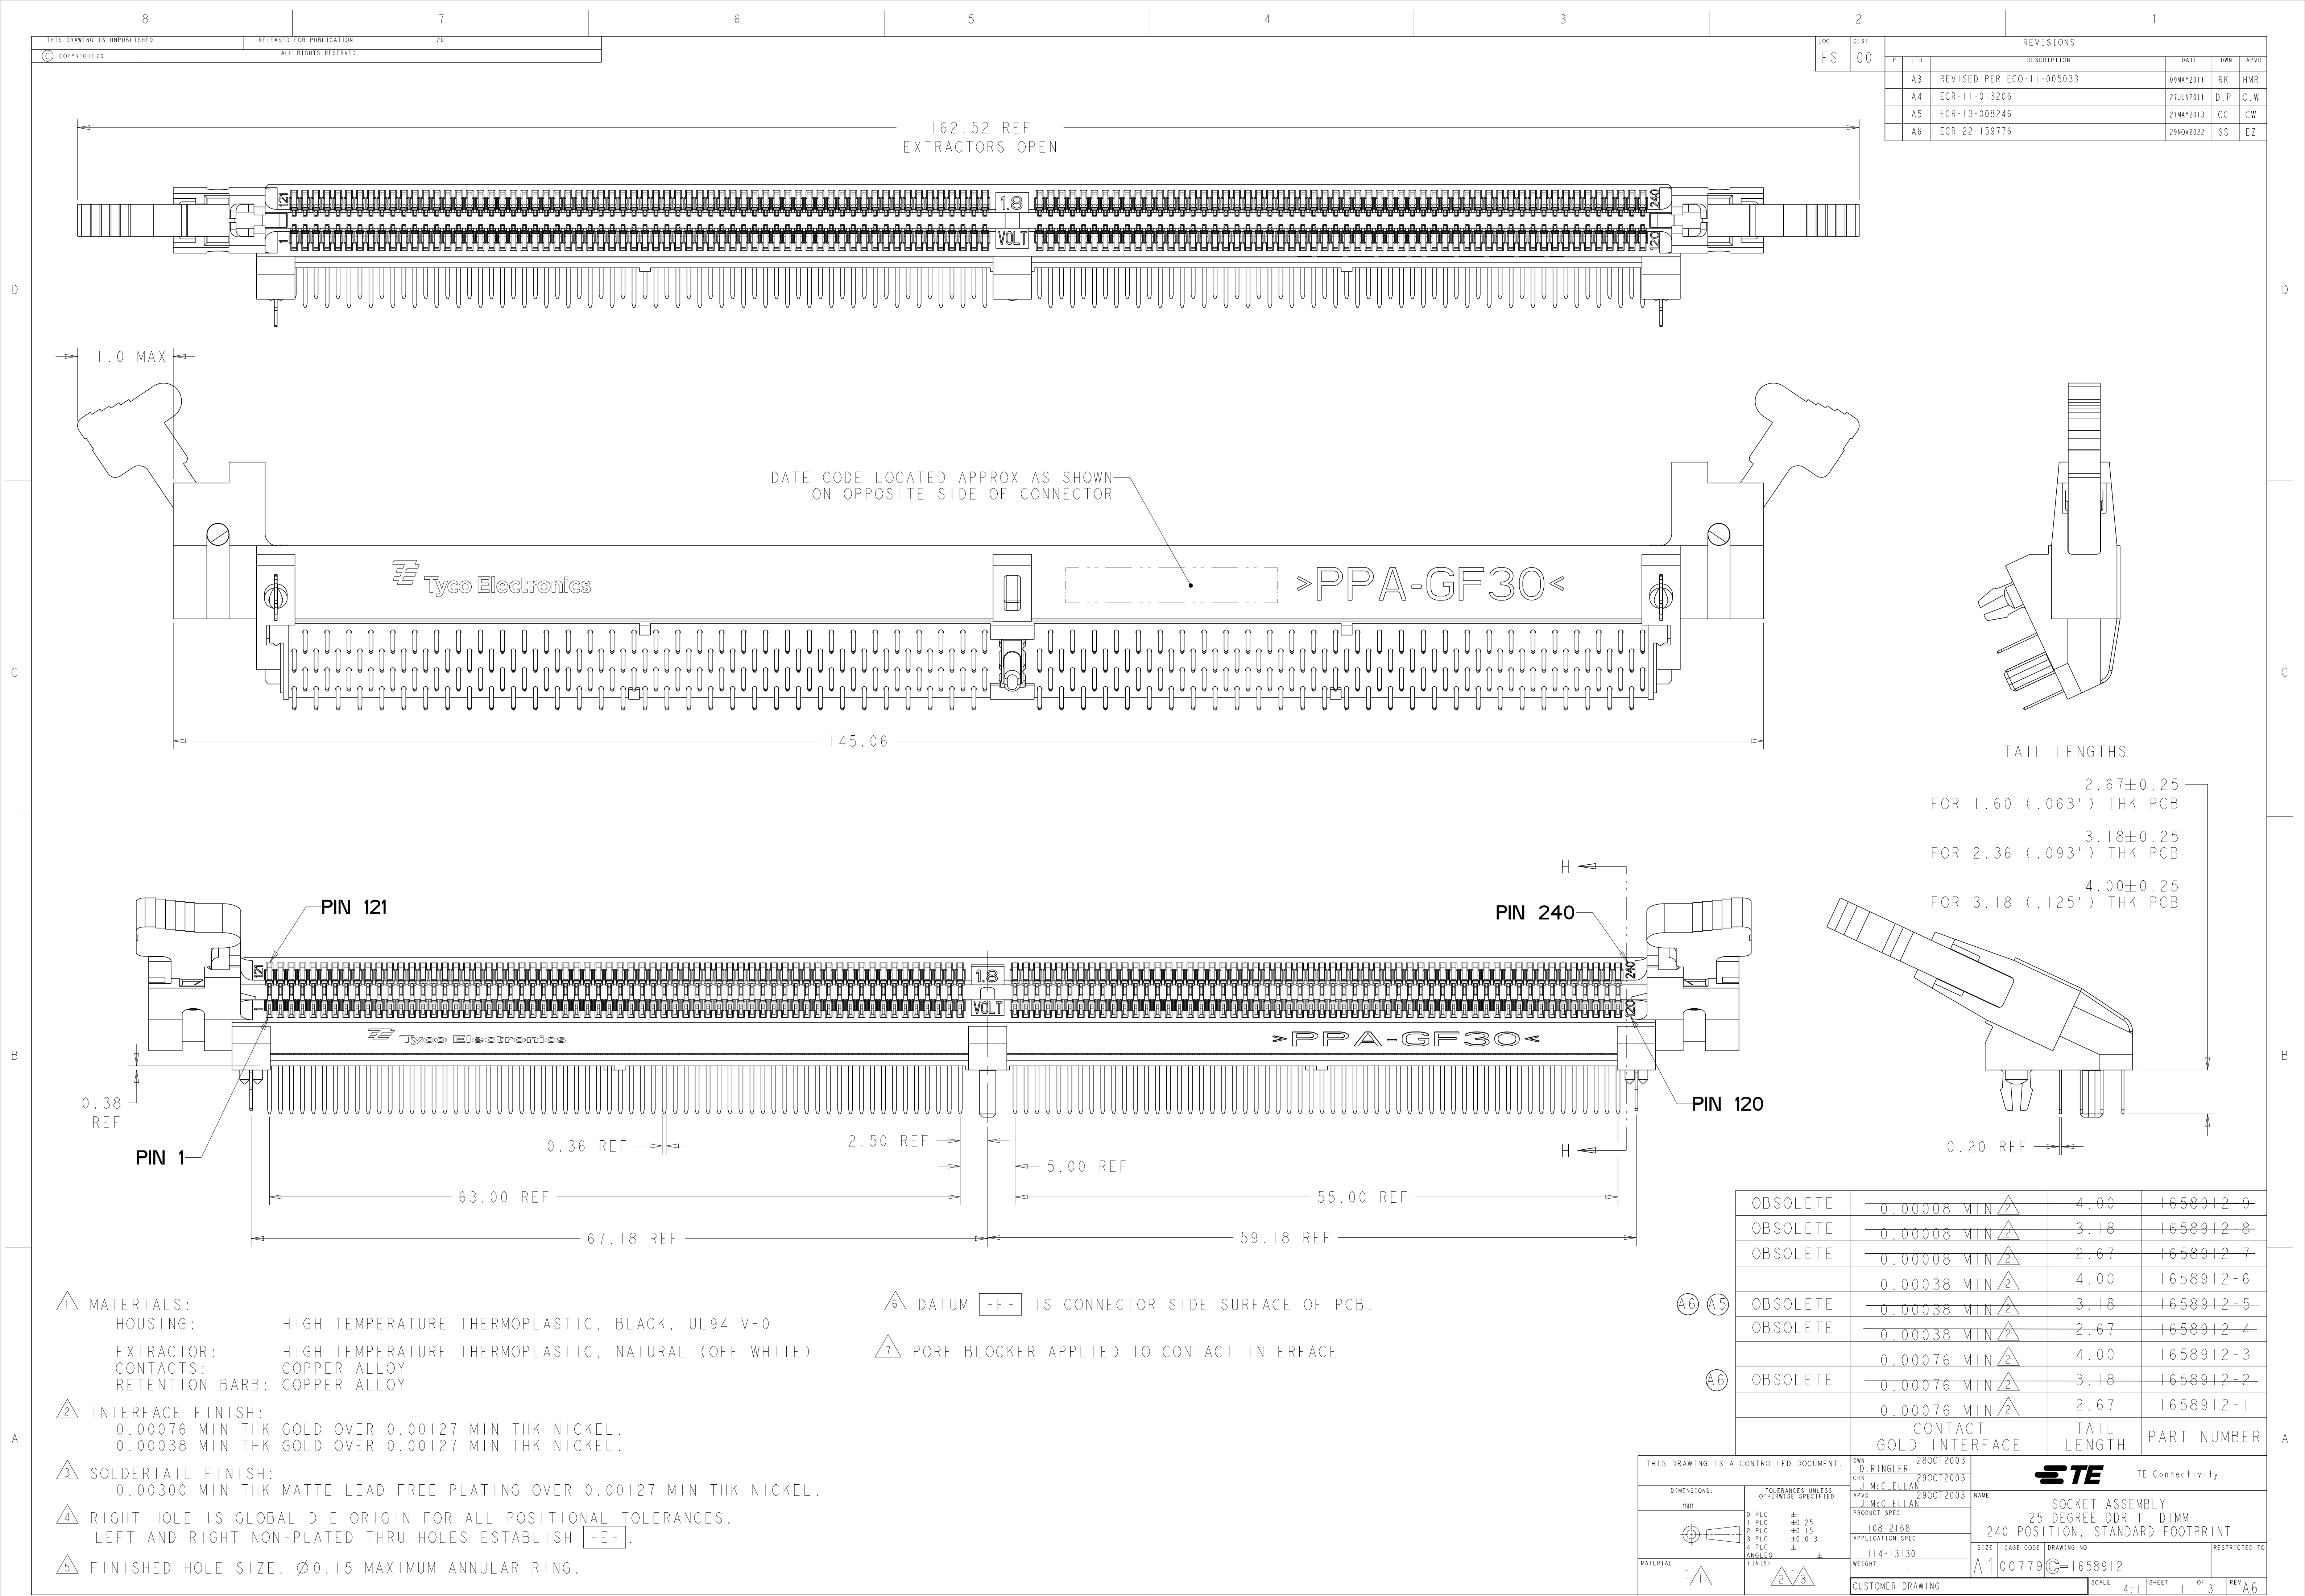
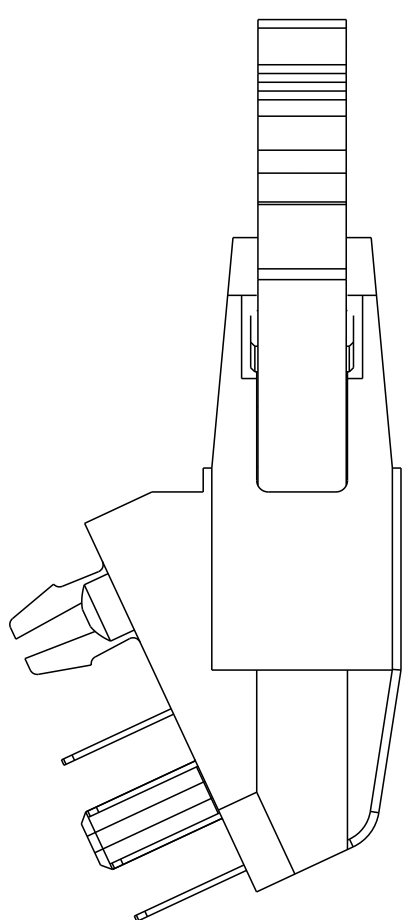


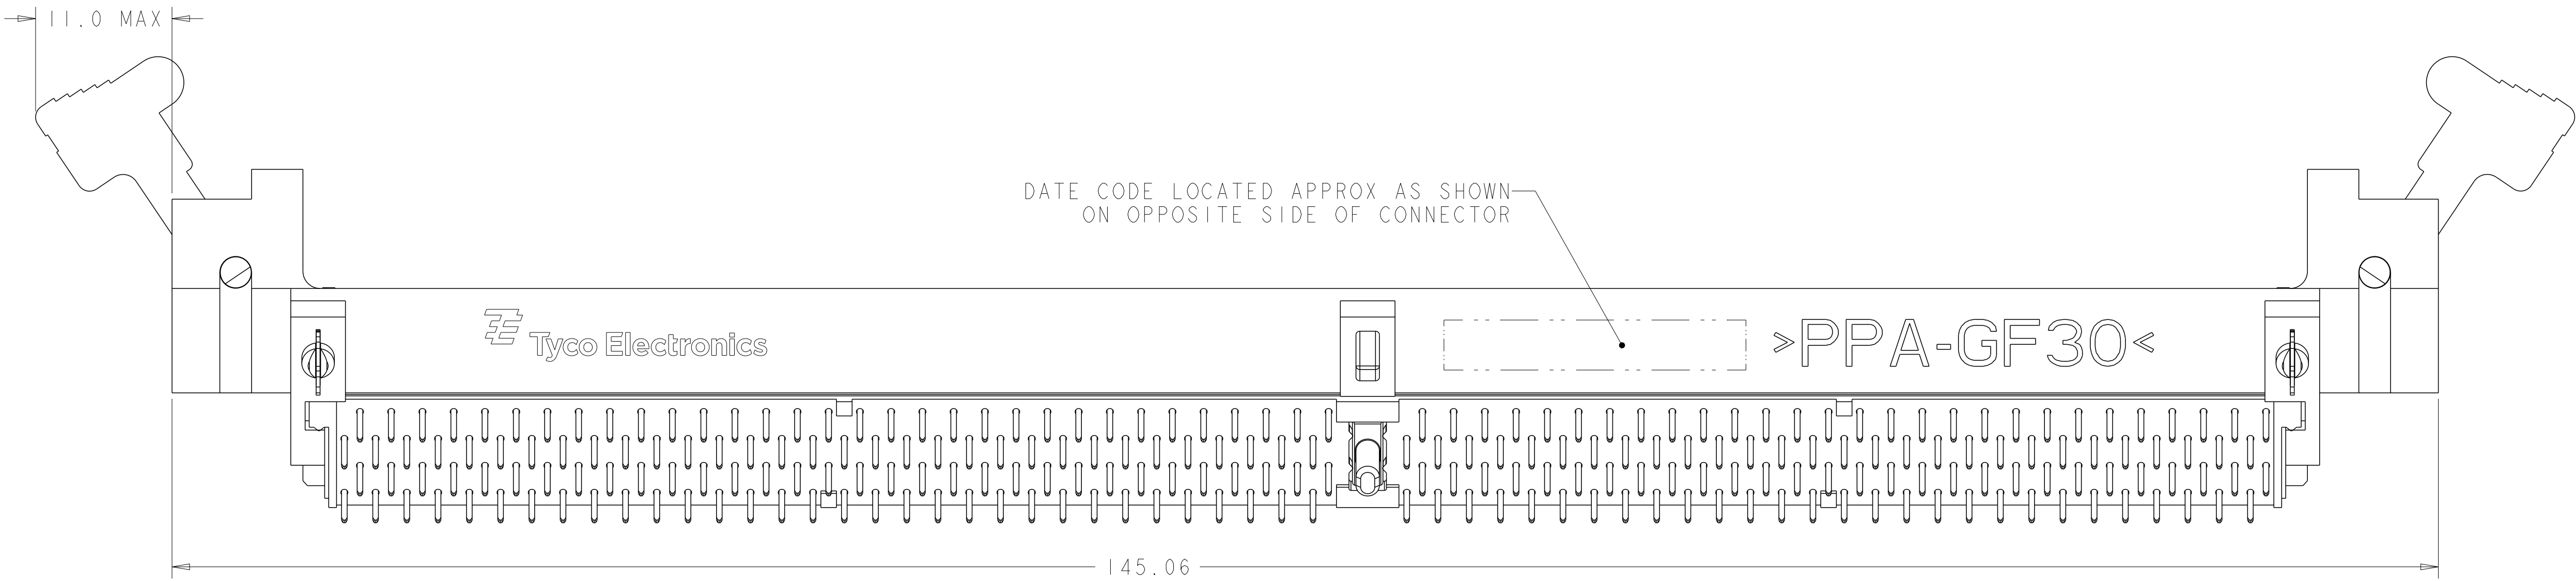

LOC		DIST		REVISIONS						
ES		00		P	LTR	DESCRIPTION	DATE	DWN	APVD	
					A3	REVISED PER ECO-11-005033	09MAY2011	RK	HMR	
					A4	ECR-11-013206	27JUN2011	D,P	C,W	
					A5	ECR-13-008246	21MAY2013	CC	CW	
					A6	ECR-22-159776	29NOV2022	SS	EZ	


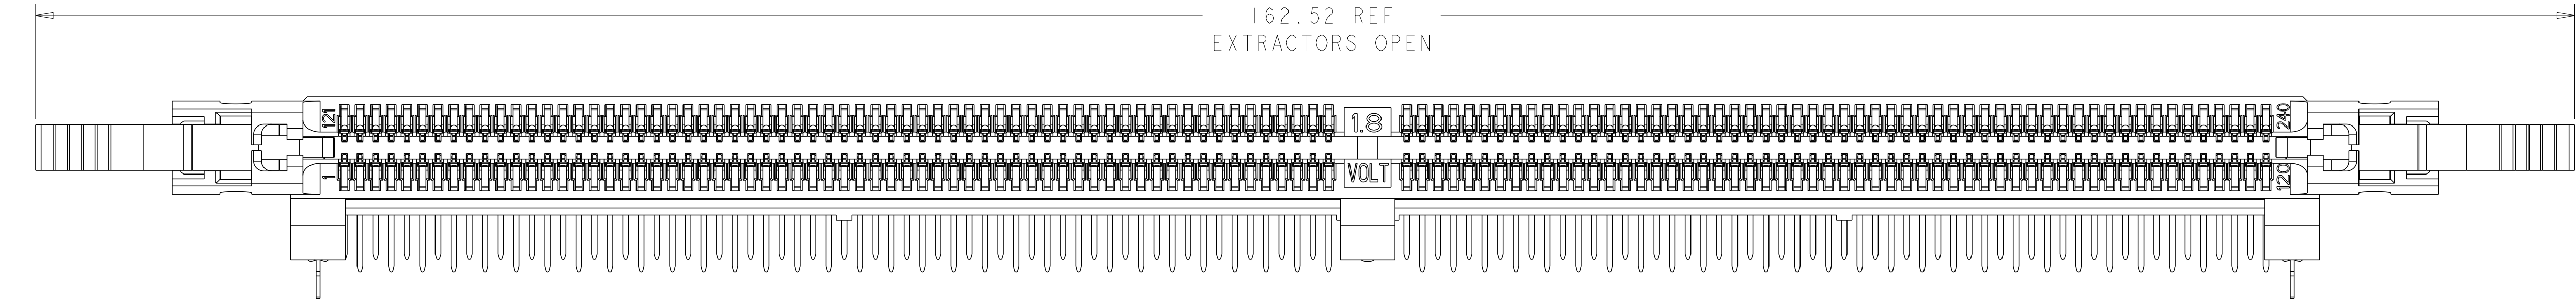


TAIL LENGTHS

2.67±0.25
FOR 1.60 (.063") THK PCB

3.18±0.25
FOR 2.36 (.093") THK PCB

4.00±0.25
FOR 3.18 (.125") THK PCB

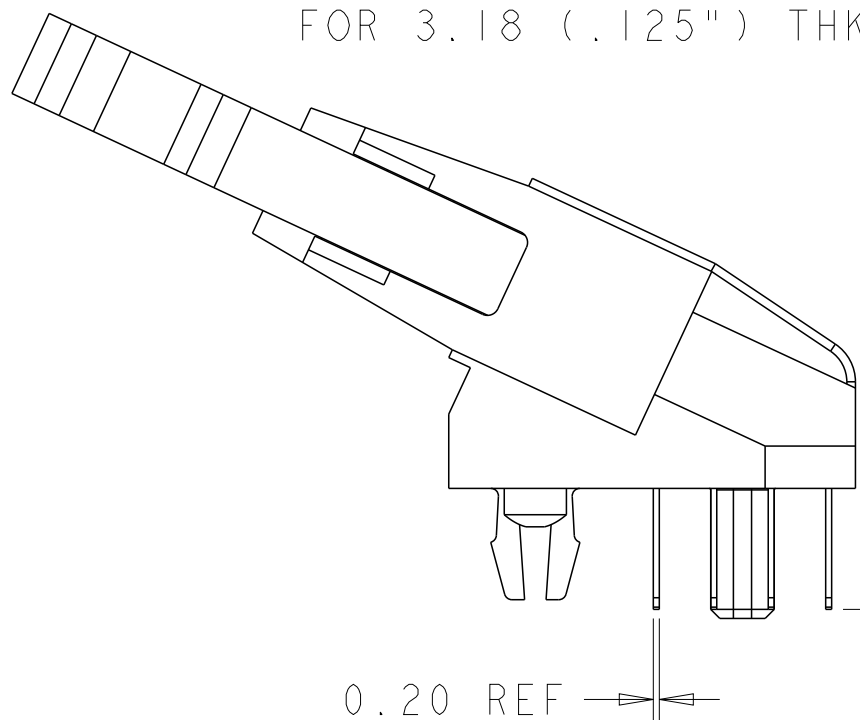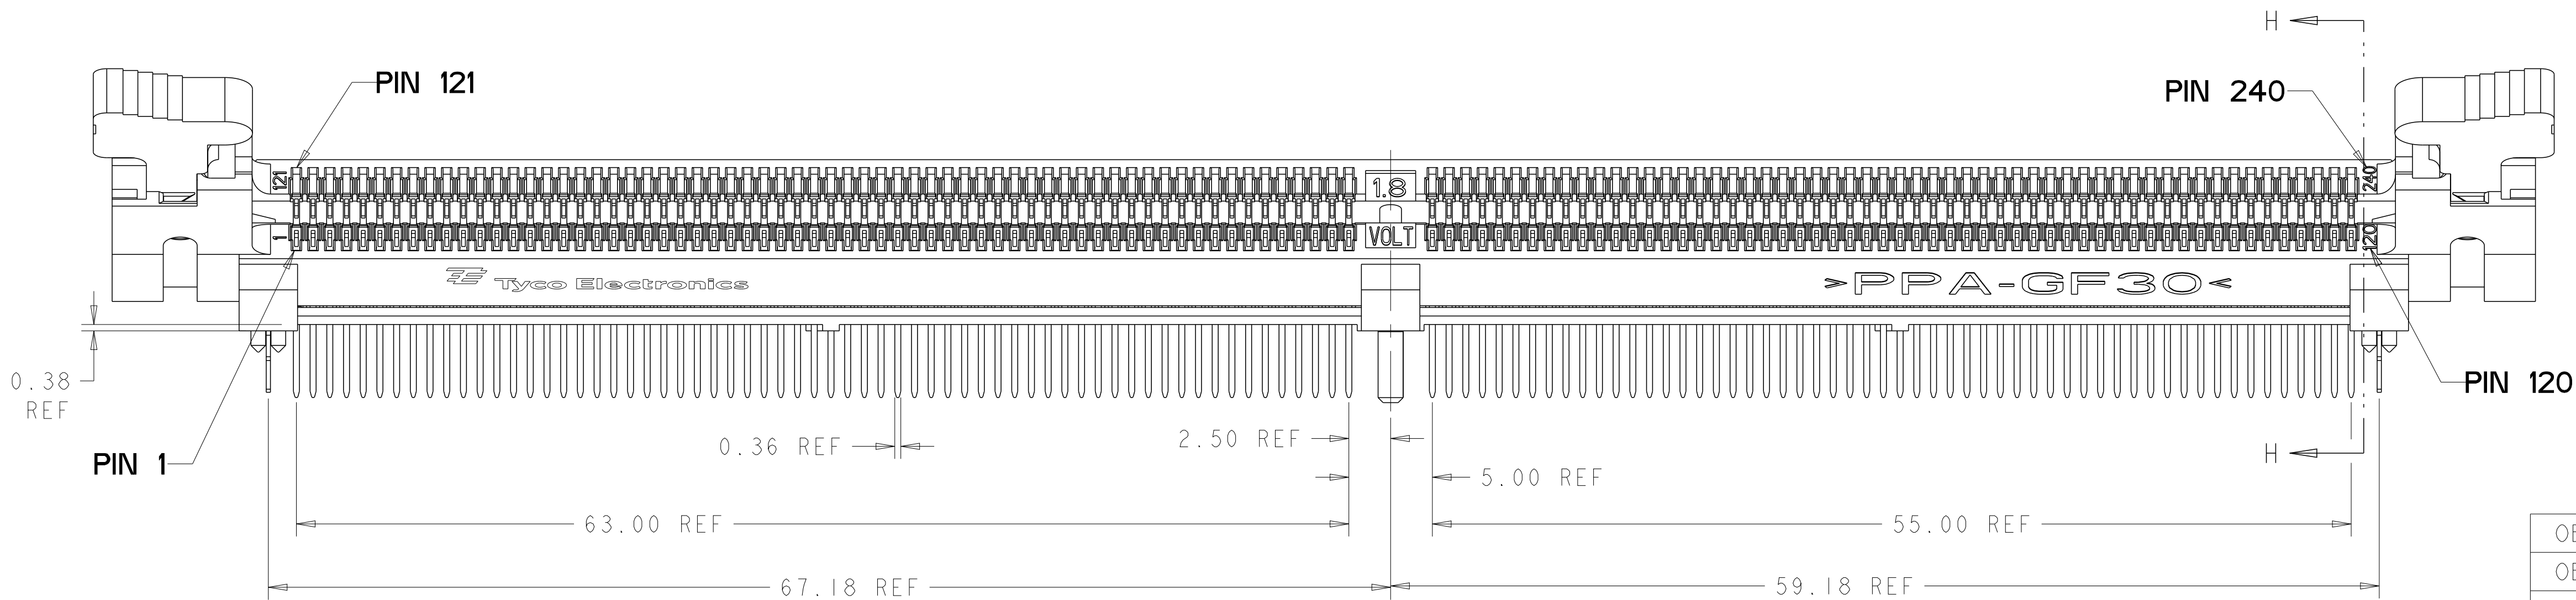

- 1 MATERIALS:
- HOUSING: HIGH TEMPERATURE THERMOPLASTIC, BLACK, UL94 V-0
- EXTRACTOR: HIGH TEMPERATURE THERMOPLASTIC, NATURAL (OFF WHITE)
- CONTACTS: COPPER ALLOY
- RETENTION BARB: COPPER ALLOY

6 DATUM **-F-** IS CONNECTOR SIDE SURFACE OF PCB.

- 2 INTERFACE FINISH:
- 0.00076 MIN THK GOLD OVER 0.00127 MIN THK NICKEL.
- 0.00038 MIN THK GOLD OVER 0.00127 MIN THK NICKEL.

7 PORE BLOCKER APPLIED TO CONTACT INTERFACE

- 3 SOLDER TAIL FINISH:
- 0.00300 MIN THK MATTE LEAD FREE PLATING OVER 0.00127 MIN THK NICKEL.



- 4 RIGHT HOLE IS GLOBAL D-E ORIGIN FOR ALL POSITIONAL TOLERANCES.
- LEFT AND RIGHT NON-PLATED THRU HOLES ESTABLISH **-E-**.

- 5 FINISHED HOLE SIZE. Ø0.15 MAXIMUM ANNULAR RING.

OBSOLETE	0.00008 MIN Δ	4.00	1658912-9
OBSOLETE	0.00008 MIN Δ	3.18	1658912-8
OBSOLETE	0.00008 MIN Δ	2.67	1658912-7
	0.00038 MIN Δ	4.00	1658912-6
OBSOLETE	0.00038 MIN Δ	3.18	1658912-5
OBSOLETE	0.00038 MIN Δ	2.67	1658912-4
	0.00076 MIN Δ	4.00	1658912-3
OBSOLETE	0.00076 MIN Δ	3.18	1658912-2
	0.00076 MIN Δ	2.67	1658912-1
	CONTACT GOLD INTERFACE	TAIL LENGTH	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN D. RINGLER CHK J. McCLELLAN APVD J. McCLELLAN	28OCT2003 29OCT2003 29OCT2003	TE Connectivity	
DIMENSIONS:		TOLERANCES UNLESS OTHERWISE SPECIFIED:		NAME	
mm		0 PLC ±.025 1 PLC ±0.15 2 PLC ±0.13 3 PLC ±.013 4 PLC ±. ANGLES ±1		PRODUCT SPEC	
				APPLICATION SPEC	
MATERIAL				SIZE	
				CAGE CODE	
				DRAWING NO	
				RESTRICTED TO	
				A100779	
				C=1658912	
				CUSTOMER DRAWING	
				SCALE	
				4:1	
				SHEET	
				1 OF 3	
				REV	
				A6	

LOC	DIST	REVISIONS			
ES	00	P	LTR	DESCRIPTION	DATE
					DWN
					APVD

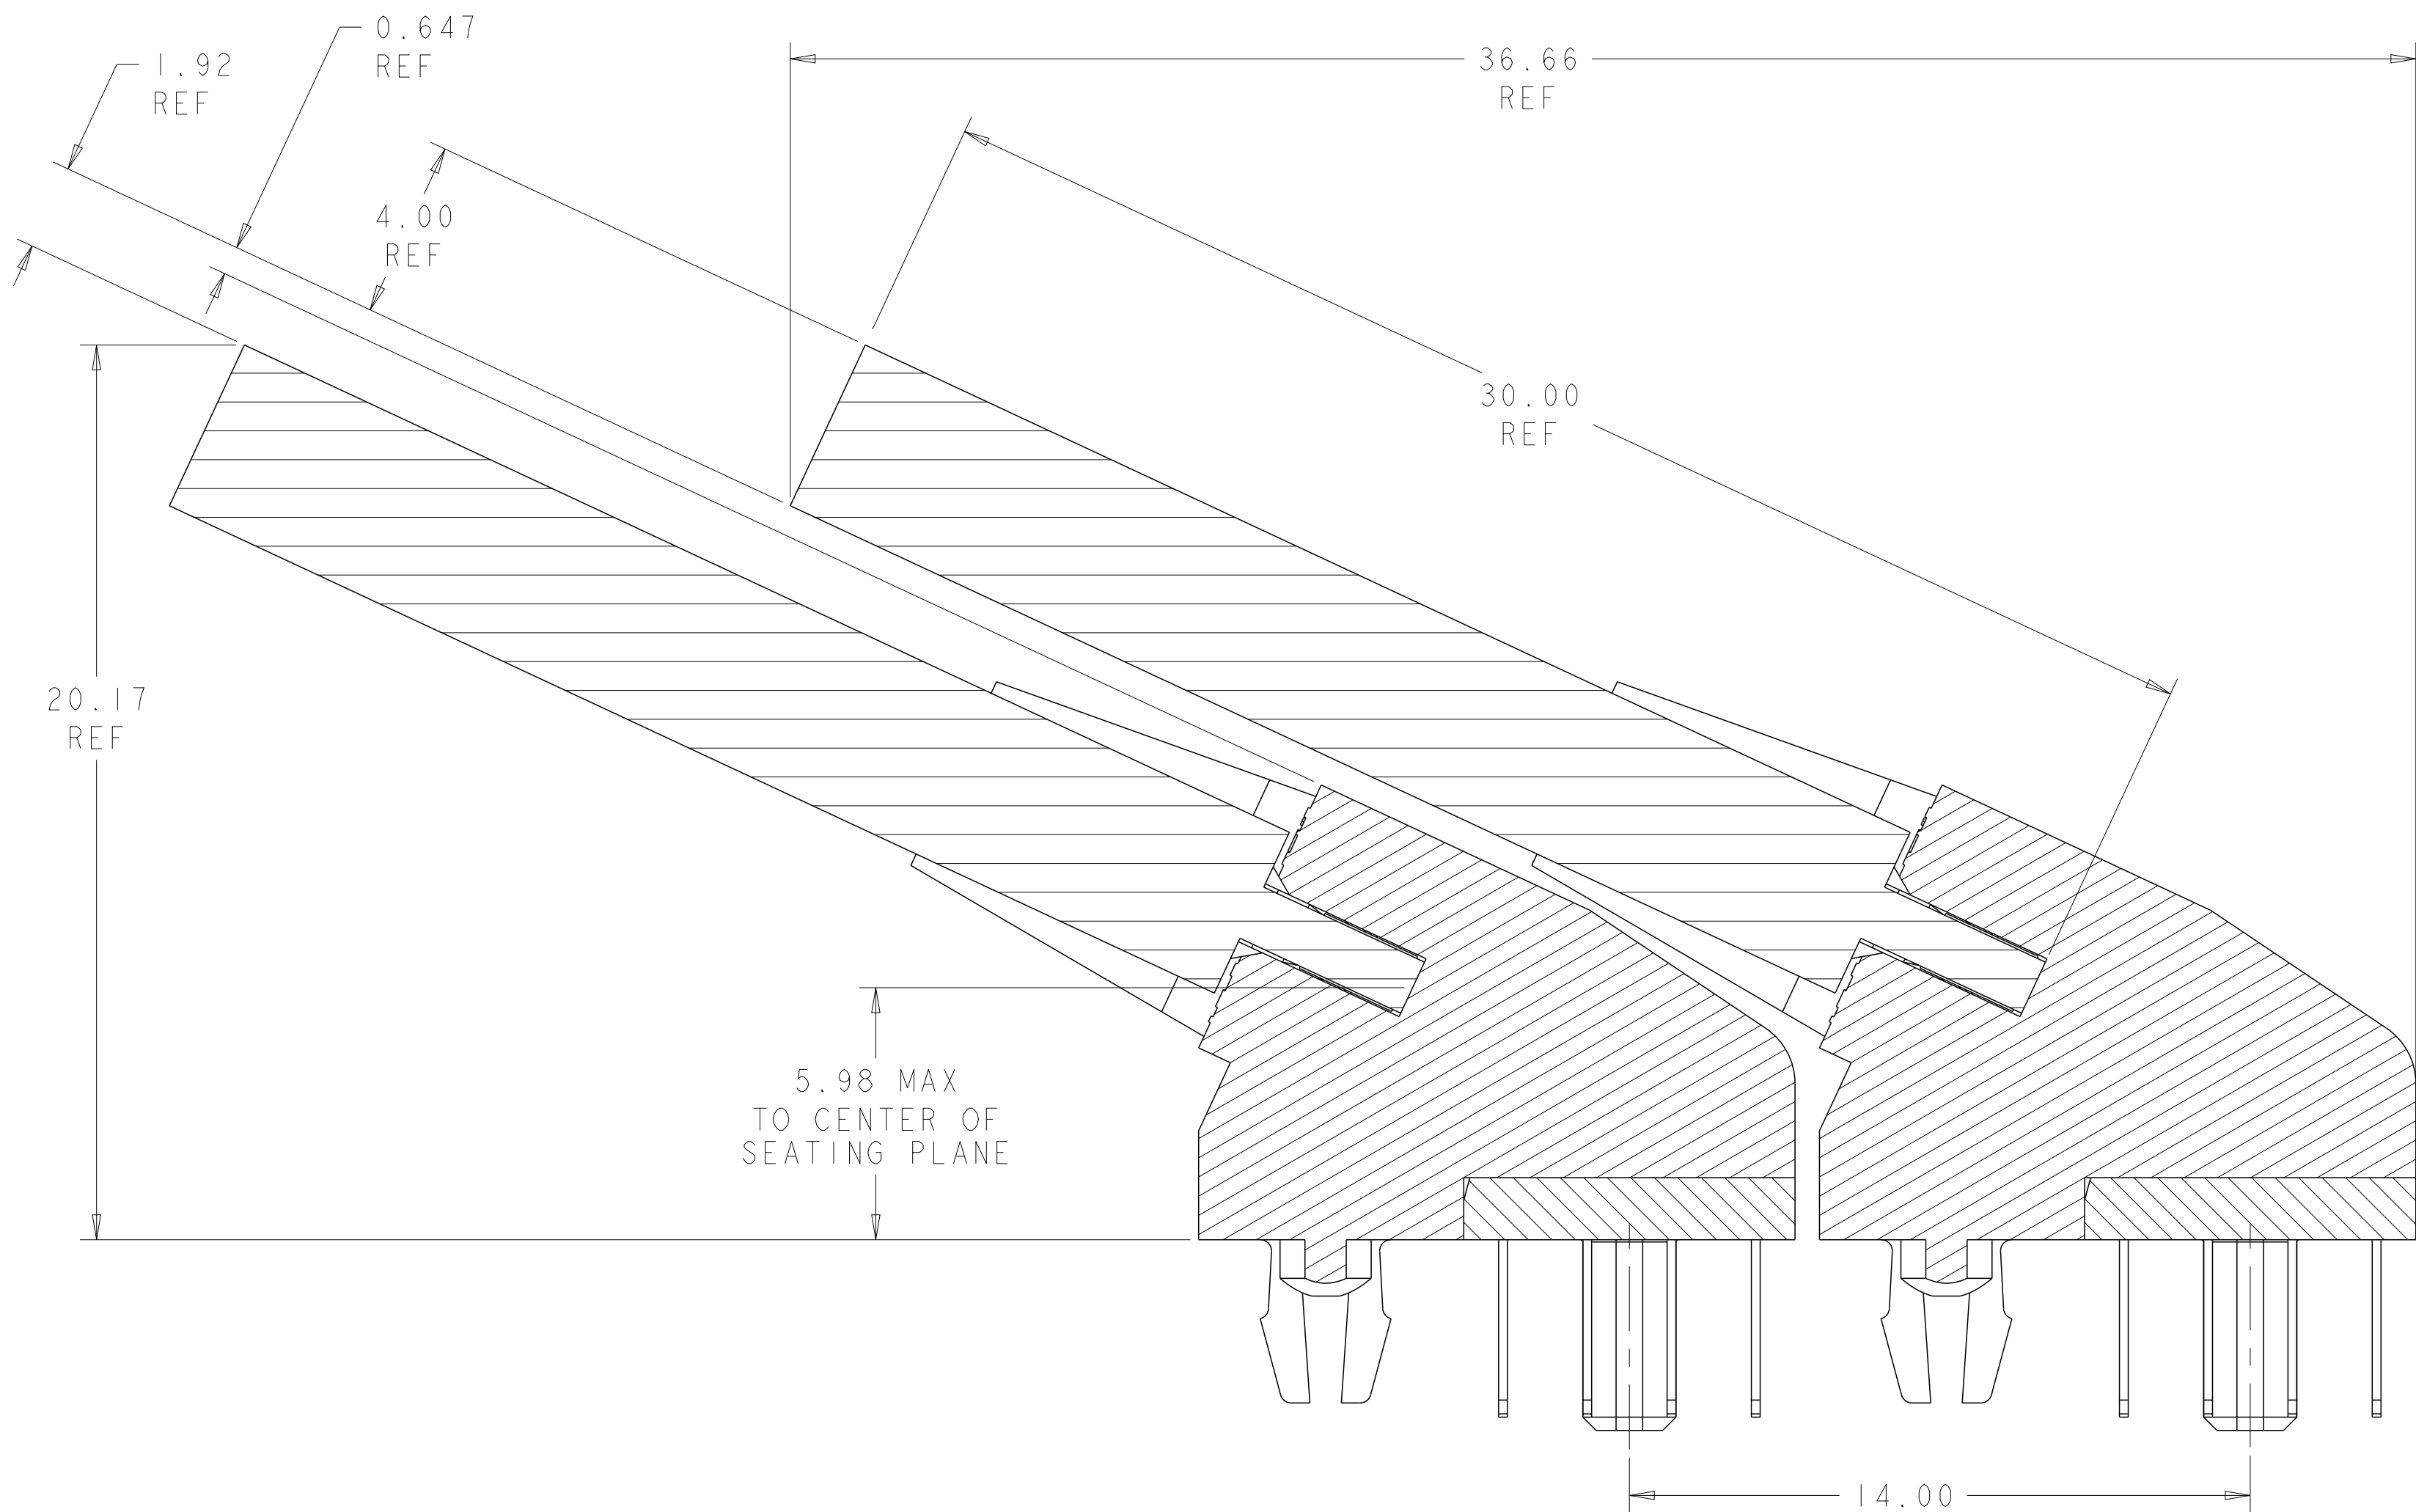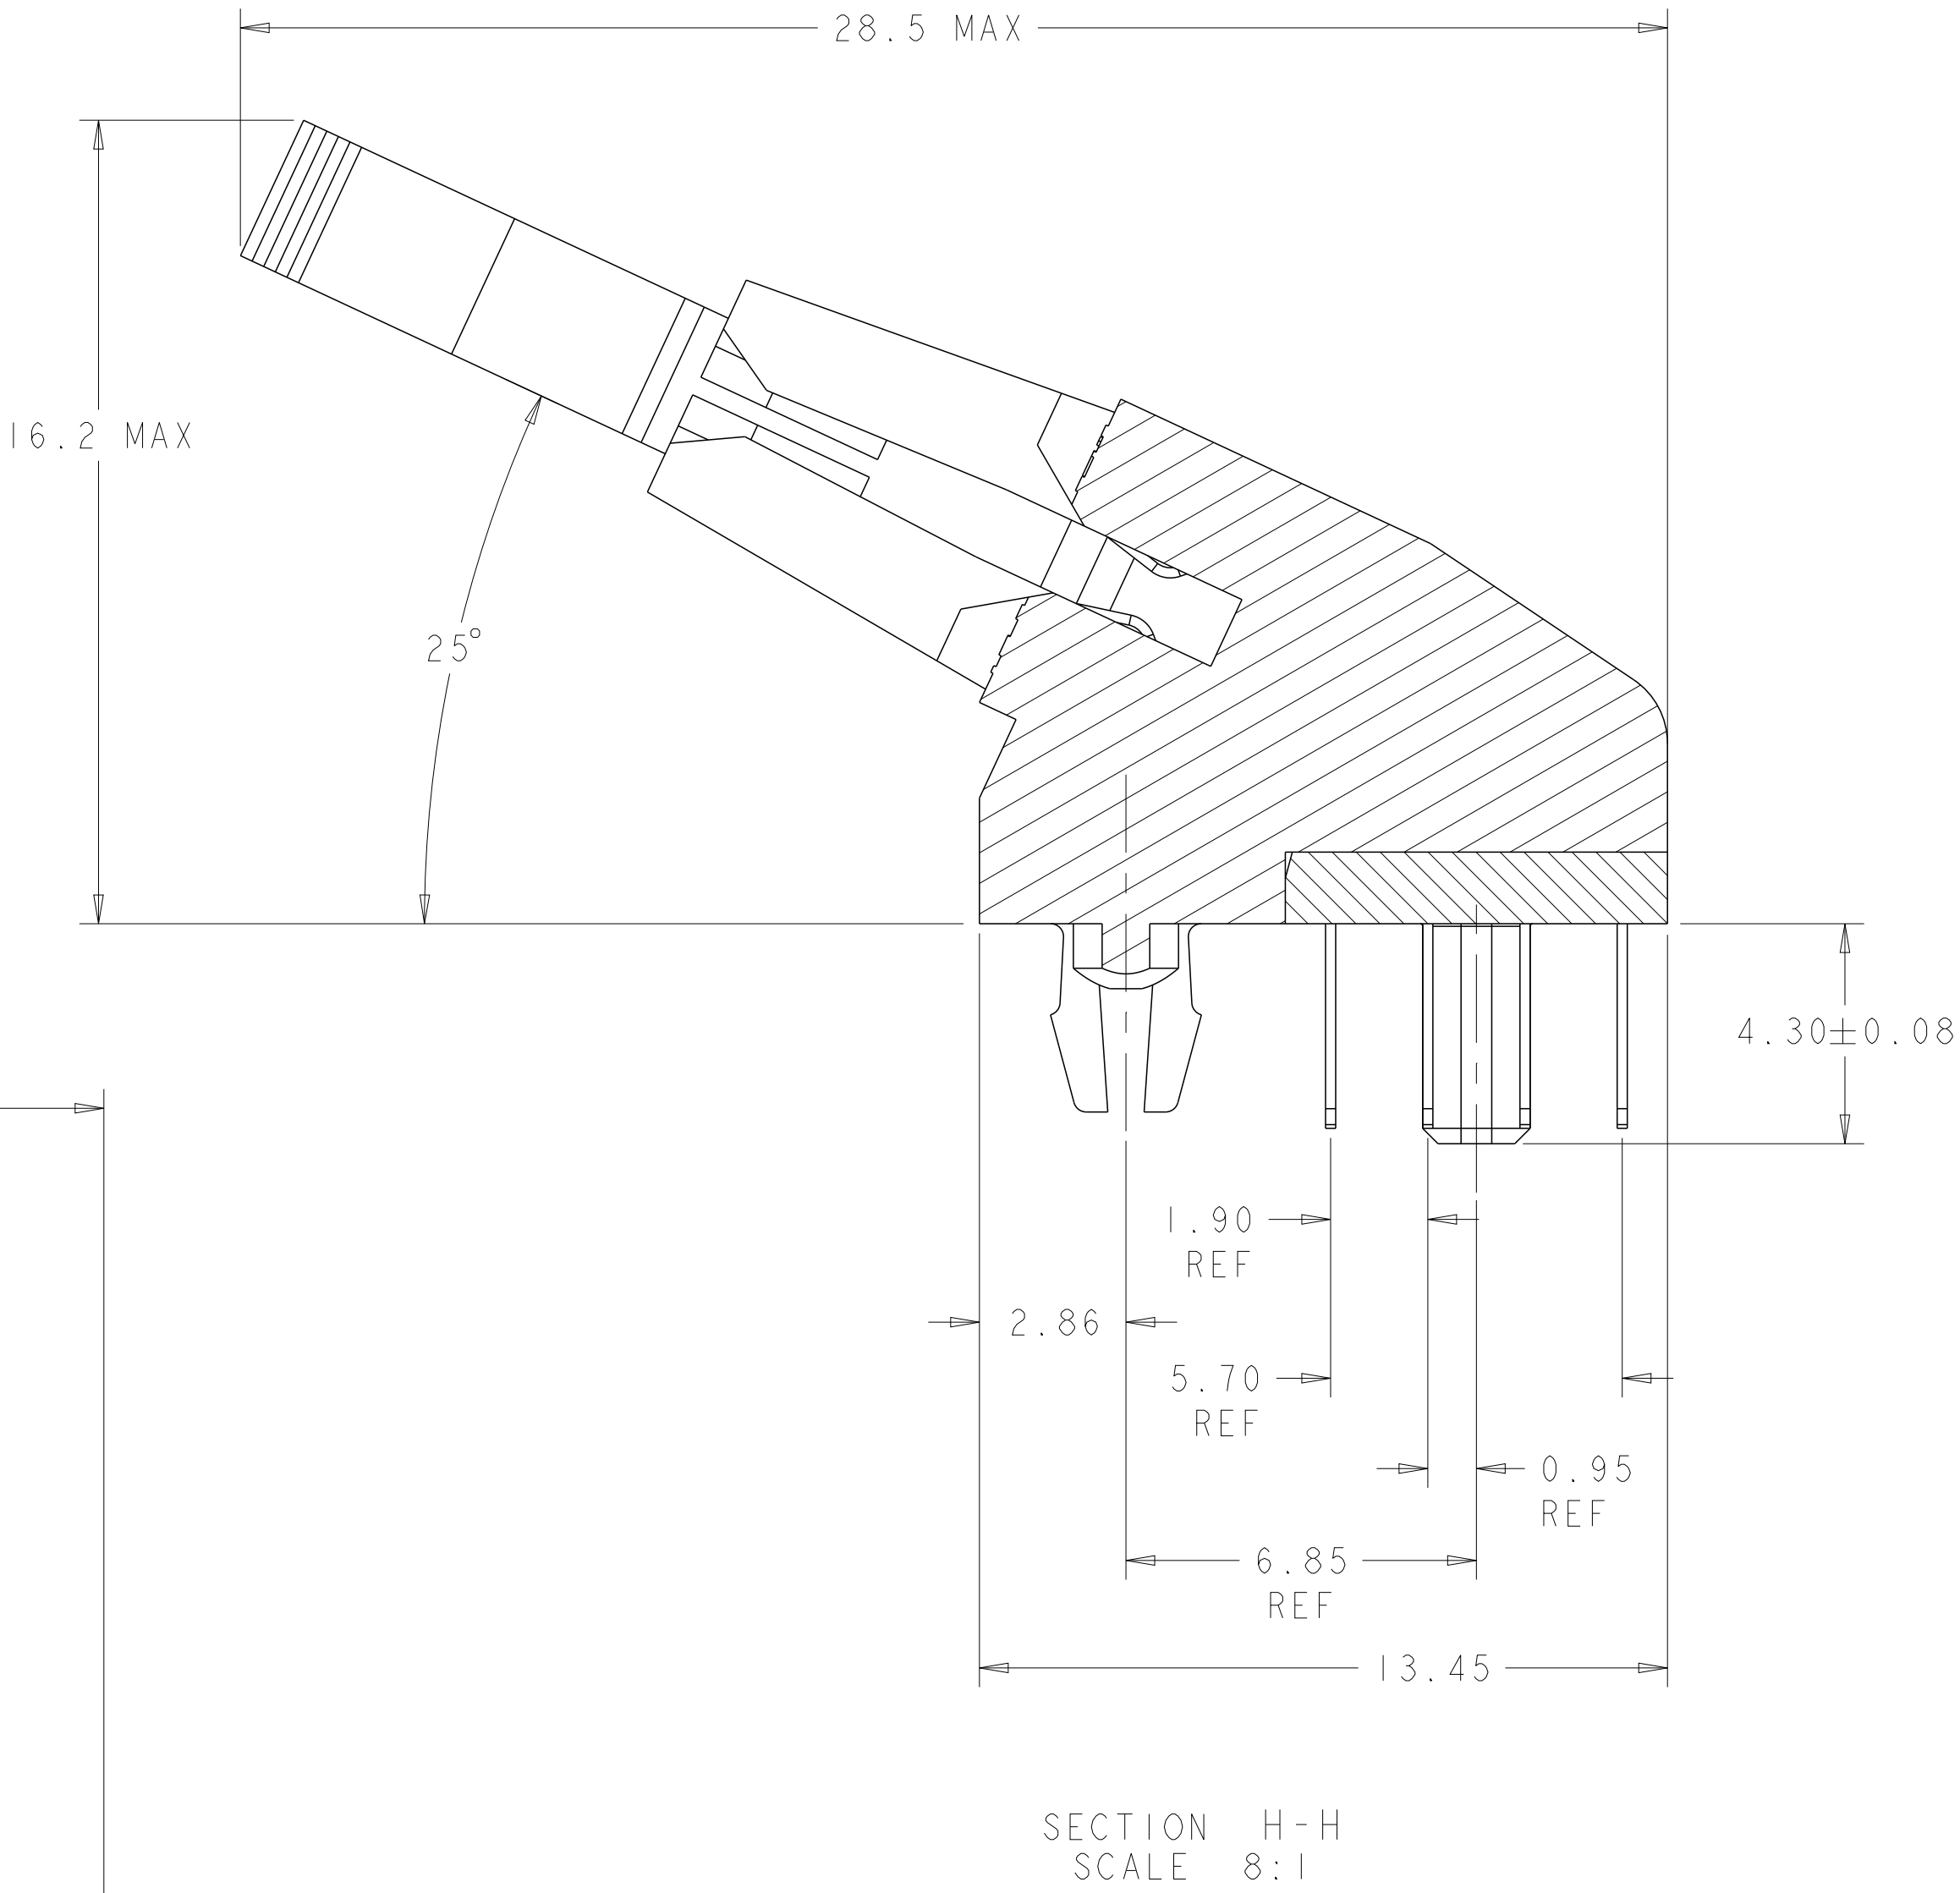

MINIMUM RECOMMENDED ROW TO ROW SPACING
FOR 4mm THICK MODULE

SCALE 8:1

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN D. RINGLER 28OCT2003	TE Connectivity	
DIMENSIONS:		CHK J. McCLELLAN 29OCT2003		
mm	TOLERANCES UNLESS OTHERWISE SPECIFIED:	APVD J. McCLELLAN 29OCT2003	NAME	
	0 PLC ±	PRODUCT SPEC	SOCKET ASSEMBLY 25 DEGREE DDR II DIMM 240 POSITION, STANDARD FOOTPRINT	
	1 PLC ±0.25	108-2168		
	2 PLC ±0.15	APPLICATION SPEC		
	3 PLC ±0.013	114-13130		
MATERIAL	FINISH	WEIGHT	SIZE	RESTRICTED TO
-	-	-	A100779C=1658912	SCALE 4:1 SHEET 2 OF 3 REV A6
CUSTOMER DRAWING				

