

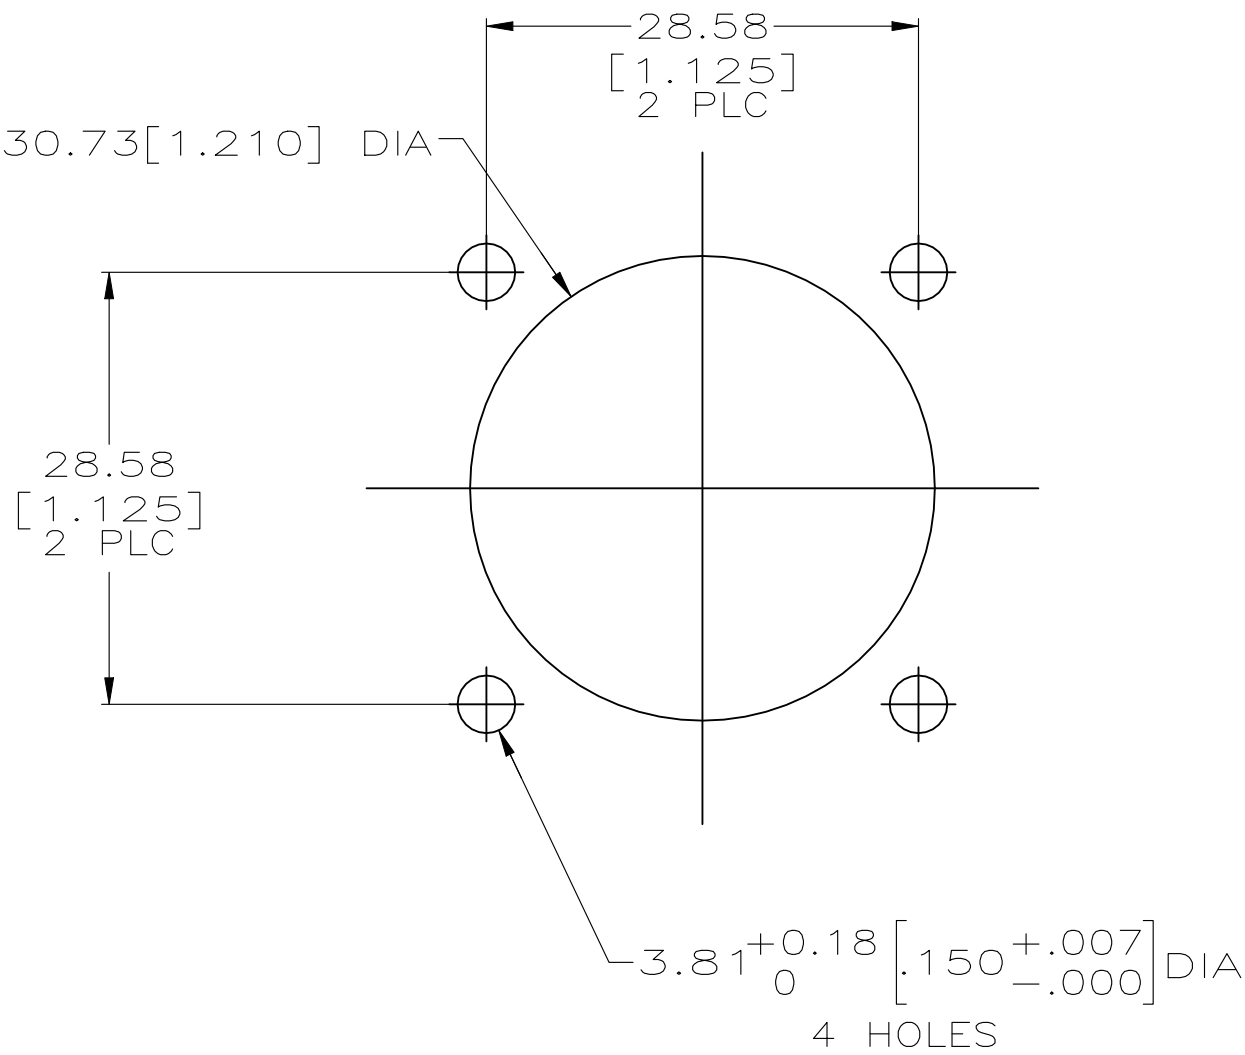
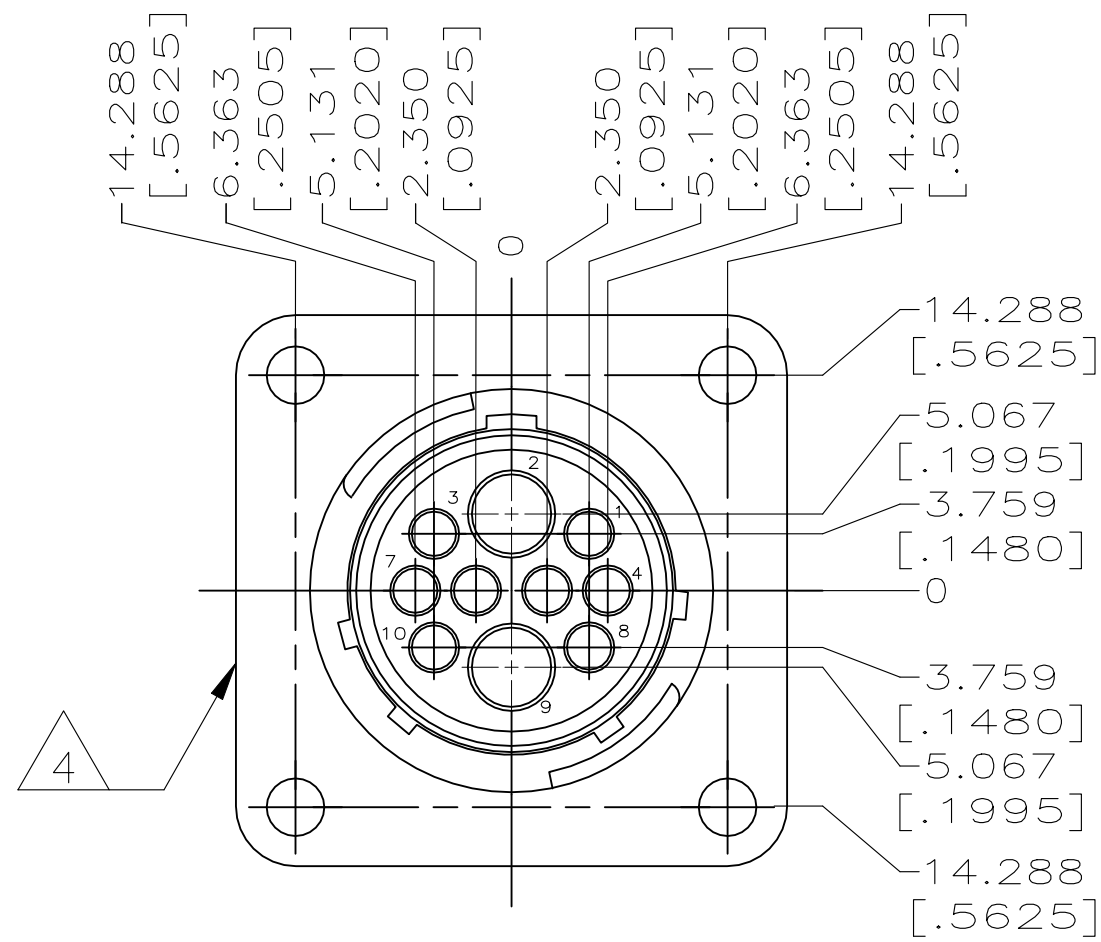


P	LTR	DESCRIPTION	DATE	DWN	APVD
B		ECO-21-006943	13OCT2021	RK	MZ

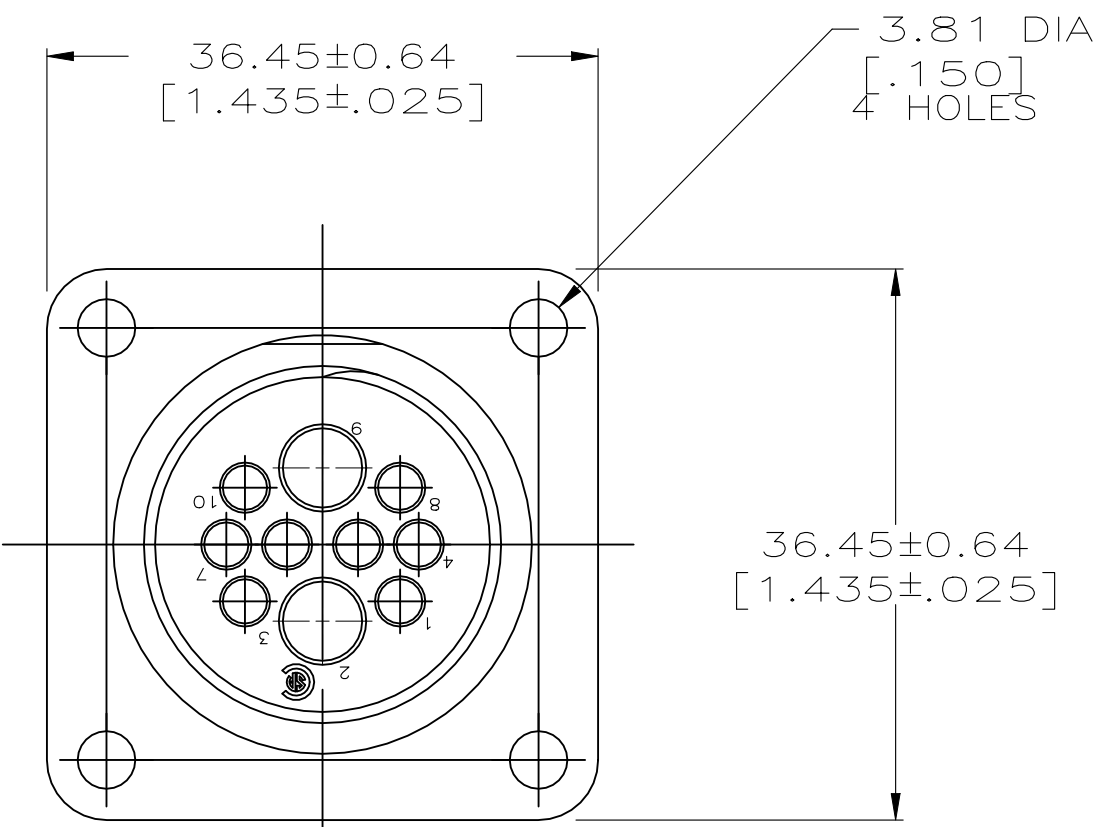


RECOMMENDED PANEL CUTOUT

1. THIS CONNECTOR WILL ACCEPT TWO TYPE I, SIZE 12 SOCKET CONTACTS AND EIGHT MULTIMATE SOCKET CONTACTS.
 2. TYPE I CONTACTS MATE FIRST, BREAK LAST.
 3. MAX WIRE INSULATION USED WITH THIS RECEPTACLE IS 2.67[.105] DIA FOR MULTIMATE SOCKET CONTACTS.
4. TE LOGO AND PART NUMBER LOCATED ON ANY FLANGE EDGE

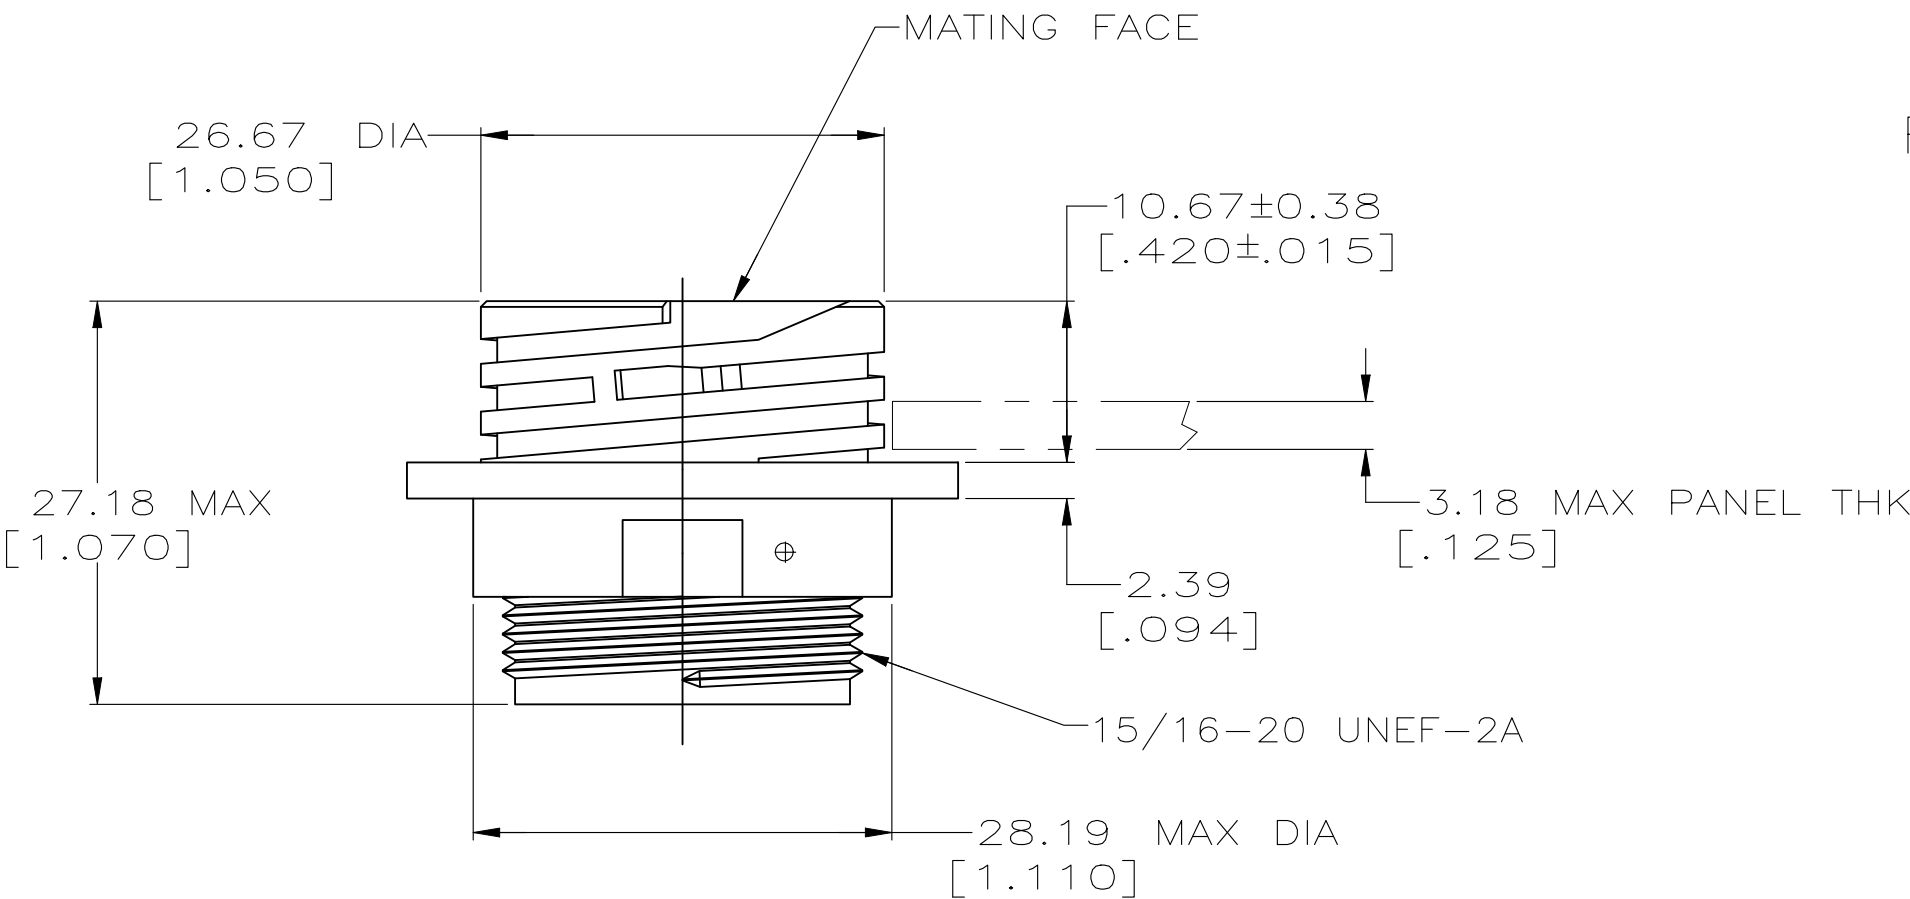

213128-1
PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN C.OBERMAN 05/18/95		 TE Connectivity	
DIMENSIONS: mm[INCHES]		CHK R.STONE 5-23-95			
		TOLERANCES UNLESS OTHERWISE SPECIFIED:		NAME RECEPTACLE, ARR 17-10M, REVERSE SEX, SERIES 4, CLASS A, SQUARE FLANGE, CPC	
		0 PLC ± -			
		1 PLC ± -			
		2 PLC ± 0.25 [.010]			
		3 PLC ± 0.250 [.0100]		SIZE A2 CAGE CODE 00779 DRAWING NO C-213128 RESTRICTED TO -	
		4 PLC ± -			
		ANGLES ± -			
		FINISH -			
MATERIAL NYLON, BLACK		WEIGHT -			
		CUSTOMER DRAWING		SCALE 2:1 SHEET 1 of 1 REV B	