



© 2019 TE Connectivity. All Rights Reserved.


REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	B	SEE ECR-18-012813/ECR-18-012319	01AUG18	JL	EJ
	C	REVISED ECO-18-017400	07NOV2018	SX	EJ
	C1	REVISED ECR-19-004927	09APR2019	SX	EJ

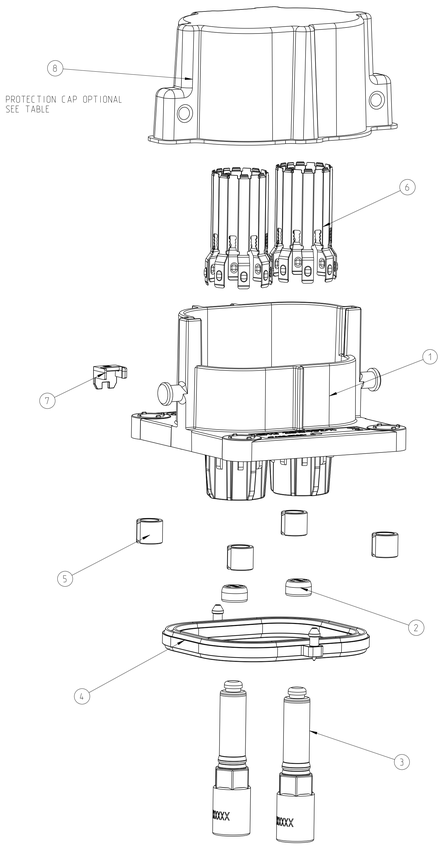


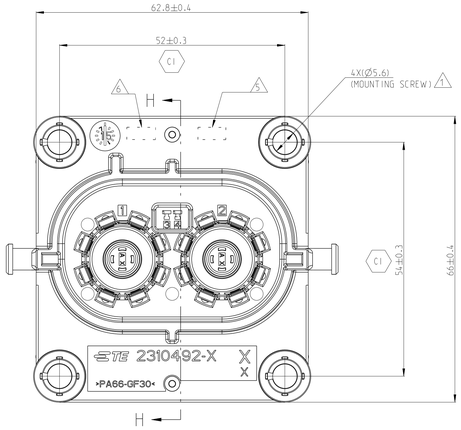

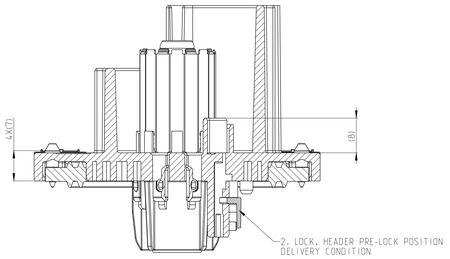

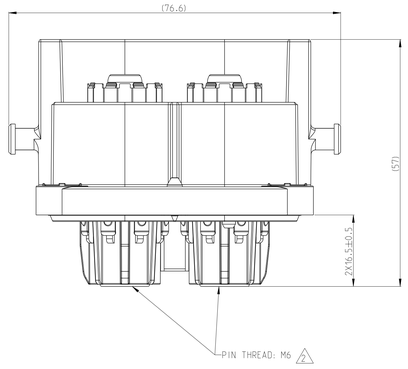

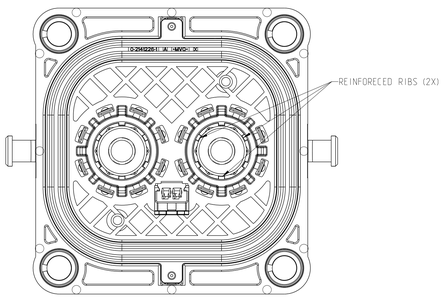

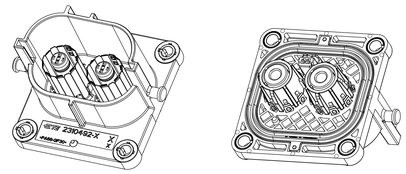

•-1 AS SHOWN

1 MOUNTING SCREW M5 WITH MINIMUM SCREWHEAD Ø10MM.
MAXIMUM SCREWHEAD Ø12MM
RECOMMENDED TIGHTENING TORQUE OF THE SCREW 6±0.5NM
THREAD ENGAGEMENT ACCORDING TO TE-DRAWING NO: 114-94032

2 RECOMMENDED TIGHTENING TORQUE OF THE SCREW M6:8±1NM
A SCREW RETENTION WILL RECOMMENDED

3 SUITABLE HVIL-CONTACTS: TE P/N: 1418760-3

4 FIRE RETARTANT CLASS FOR PLASTIC PART MATERIAL REFER TO TABLE AS BELOW:

P/N	FIRE RETARTANT CLASS OF PLASTIC MATRIAL (NOT INCLUDE DUST CAP)
2322122-1	HB
2322122-2	
2322122-3	
2322122-4	
2322122-5	
2322122-6	
2322122-7	
2322122-8	
1-2322122-1	
1-2322122-2	
1-2322122-3	
1-2322122-4	
1-2322122-5	
1-2322122-6	
1-2322122-7	
1-2322122-8	
2-2322122-1	
2-2322122-2	
2-2322122-3	
2-2322122-4	
2-2322122-5	
2-2322122-6	
2-2322122-7	
2-2322122-8	

P/N	FIRE RETARTANT CLASS OF PLASTIC MATRIAL (NOT INCLUDE DUST CAP)
3-2322122-1	V0
3-2322122-2	
3-2322122-3	
3-2322122-4	
3-2322122-5	
3-2322122-6	
3-2322122-7	
3-2322122-8	
4-2322122-1	
4-2322122-2	
4-2322122-3	
4-2322122-4	
4-2322122-5	
4-2322122-6	
4-2322122-7	
4-2322122-8	
5-2322122-1	
5-2322122-2	
5-2322122-3	
5-2322122-4	
5-2322122-5	
5-2322122-6	
5-2322122-7	
5-2322122-8	

5 ASSY. P/N MARKING

6 PRODUCTION CODE

7 OPERATION TEMPERATURE: -40~125°C

ITEM	FEATURE	TE-PART-NO 90 DEG	TE-PART-NO 180 DEG
8	MATING CONNECTOR: 2POS.8MM HV.REC HSG. ASSY.SEALED	2310922 2141154	2310923 2177053
9	INTERFACE DRAWING FOR MATING SIDE	114-94034	
10	INTERFACE DRAWING FOR MOUNTING SIDE	114-94032	
11	PRODUCT-SPEC	108-32233	108-32234
12	APPLICATION-SPEC	114-32213	

-	-	-	-	1	1	1	1	2. LOCK. IL. HEADER	PA6-(GF/GB) HB	GRAY SIM RAL 7037	(113.3)	7	
1	1	1	1	-	-	-	-		PA6-(GF) V0	RED SIM RAL 3000			
2	2	2	2	2	2	2	2	SHIELDING SLEEVE	Cu-ALLOY	TIN PLATED		6	
4	4	4	4	4	4	4	4	COMPRESSION DELIMITER. HV HEADER	CARBON STEEL	ZnNi - PLATING		5	
-	-	-	-	1	1	1	1	RADIAL SEAL 56.4 X 50	SILICONE RUBBER HB	NATURE		4	C1
1	1	1	1	-	-	-	-		SILICONE RUBBER V0	DARK GREY			
2	2	2	2	2	2	2	2	PIN DIA 8.0. CONTACT	Cu-ALLOY	SILVER PLATED		3	
-	-	-	-	2	-	2	-	PROTECTION COVER 8MM HV	PA6-(GF/GB) HB	NATURE		2	C1
-	-	-	-	-	2	-	2		PA6-(GF/GB) HB	BLACK SIM RAL 9005			
2	-	2	-	-	-	-	-		PA66 V0	WHITE SIM RAL 9010			
-	2	-	2	-	-	-	-		PA66 V0	BLACK SIM RAL 9005			
-	-	-	-	1	-	-	-	2POS.PIN DIA 8.0.PIN HSG,90,SEALED	PA66-GF HB	ORANGE SIM RAL 2003		1	
-	-	-	-	-	1	-	-		PA66-GF HB				
-	-	-	-	-	-	1	-		PA66-GF HB				
-	-	-	-	-	-	-	1		PA66-GF HB				
1	-	-	-	-	-	-	-		PA66-GF V0				
-	1	-	-	-	-	-	-		PA66-GF V0				
-	-	1	-	-	-	-	-		PA66-GF V0				
-	-	-	1	-	-	-	-		PA66-GF V0				
3-2322122-4	3-2322122-3	3-2322122-2	3-2322122-1	2322122-4	2322122-3	2322122-2	2322122-1	DESCRIPTION	MATERIAL	SURFACE COLOUR	WEIGHT [g]	ITEM	
D	C	B	A	D	C	B	A	CODING					
2POS.PIN DIA 8.0.PIN HSG,90,ASSY				DESCRIPTION									
QTY PER ASSY PARTS				PART LIST									

3-2322122-8	D	2POS.PIN DIA 8.0.PIN HSG,90,ASSY PROTECTION CAP	-	9-2208100-1	2POS. PROTECTION CAP	PS	BLACK SIM RAL 9005	(3.3)	1	8
			3-2322122-4	-	2POS.PIN DIA 8.0.PIN HSG,90,ASSY	-	-	-	1	1-7
3-2322122-7	C	2POS.PIN DIA 8.0.PIN HSG,90,ASSY PROTECTION CAP	-	9-2208100-1	2POS. PROTECTION CAP	PS	BLACK SIM RAL 9005	(3.3)	1	8
			3-2322122-3	-	2POS.PIN DIA 8.0.PIN HSG,90,ASSY	-	-	-	1	1-7
3-2322122-6	B	2POS.PIN DIA 8.0.PIN HSG,90,ASSY PROTECTION CAP	-	9-2208100-1	2POS. PROTECTION CAP	PS	BLACK SIM RAL 9005	(3.3)	1	8
			3-2322122-2	-	2POS.PIN DIA 8.0.PIN HSG,90,ASSY	-	-	-	1	1-7
3-2322122-5	A	2POS.PIN DIA 8.0.PIN HSG,90,ASSY PROTECTION CAP	-	9-2208100-1	2POS. PROTECTION CAP	PS	BLACK SIM RAL 9005	(3.3)	1	8
			3-2322122-1	-	2POS.PIN DIA 8.0.PIN HSG,90,ASSY	-	-	-	1	1-7

2322122-8	D	2POS.PIN DIA 8.0.PIN HSG,90,ASSY PROTECTION CAP	-	9-2208100-1	2POS. PROTECTION CAP	PS	BLACK SIM RAL 9005	(3.3)	1	8
			2322122-4	-	2POS.PIN DIA 8.0.PIN HSG,90,ASSY	-	-	-	1	1-7
2322122-7	C	2POS.PIN DIA 8.0.PIN HSG,90,ASSY PROTECTION CAP	-	9-2208100-1	2POS. PROTECTION CAP	PS	BLACK SIM RAL 9005	(3.3)	1	8
			2322122-3	-	2POS.PIN DIA 8.0.PIN HSG,90,ASSY	-	-	-	1	1-7
2322122-6	B	2POS.PIN DIA 8.0.PIN HSG,90,ASSY PROTECTION CAP	-	9-2208100-1	2POS. PROTECTION CAP	PS	BLACK SIM RAL 9005	(3.3)	1	8
			2322122-2	-	2POS.PIN DIA 8.0.PIN HSG,90,ASSY	-	-	-	1	1-7
2322122-5	A	2POS.PIN DIA 8.0.PIN HSG,90,ASSY PROTECTION CAP	-	9-2208100-1	2POS. PROTECTION CAP	PS	BLACK SIM RAL 9005	(3.3)	1	8
			2322122-1	-	2POS.PIN DIA 8.0.PIN HSG,90,ASSY	-	-	-	1	1-7
TE-ASSY-NO.	COD.	DESCRIPTION	TE-ASSY-NO.	TE-PART-NO.	DESCRIPTION	MATERIAL	SURFACE COLOUR	WEIGHT [g]	QTY	ITEM

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: mm

TOLERANCES UNLESS OTHERWISE SPECIFIED: 1 PLC ±0.5; 2 PLC ±; 3 PLC ±0.20; 4 PLC ±0.200; ANGLES ±; FINISH

MATERIAL: SEE TABLE

DWN	J.LI	09APR2019
CHK	S.Y.WANG	24JUL2017
APVD	Y.YIN	02AUG2017
PRODUCT SPEC	11	
APPLICATION SPEC	12	
WEIGHT		

TE Connectivity

NAME: 2POS.PIN DIA 8.0.PIN HSG.ASSY


SIZE A0 | CAGE CODE 00779 | DRAWING NO C-2322122 | RESTRICTED TO


CUSTOMER DRAWING,RESTRICTED CUSTOMER | SCALE 2:1 | SHEET 1 OF 4 | REV C1

4806 13/133


© 2019 TE Connectivity, All Rights Reserved.

REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
		SEE SHEET 1			

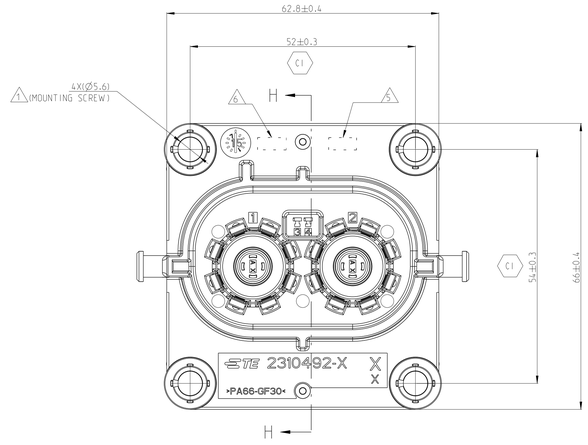


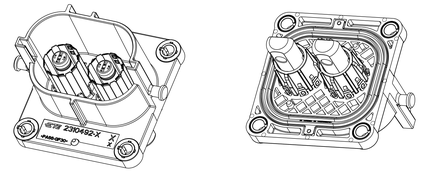


1-•-1 AS SHOWN

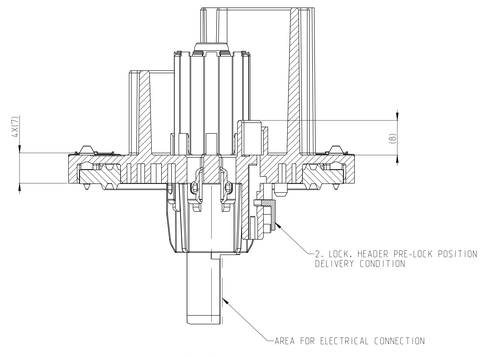

H-H

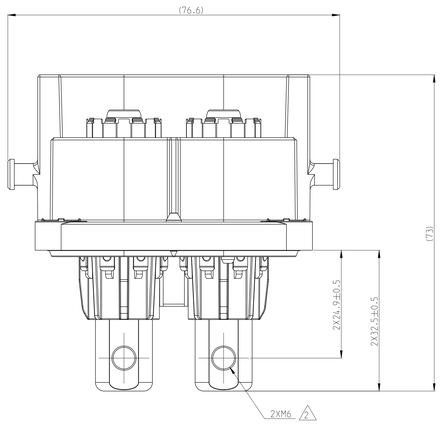

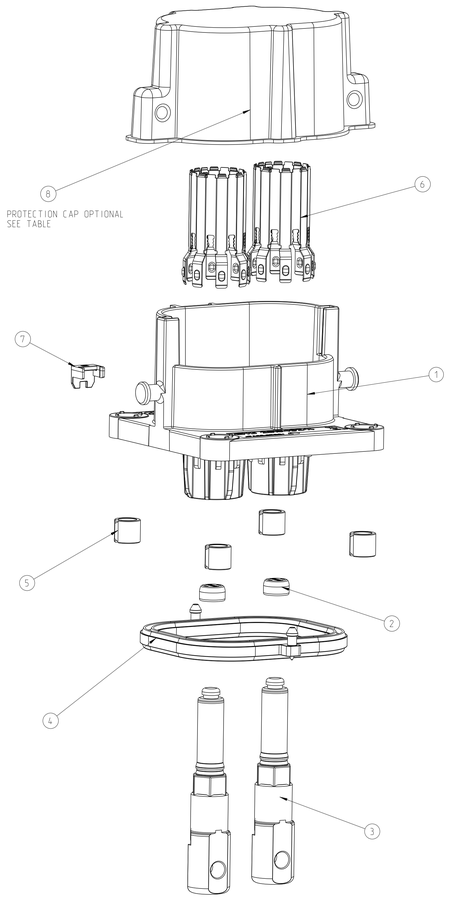

-	-	-	-	1	1	1	1	2. LOCK. IL. HEADER	PA6-(GF/GB) HB	GRAY SIM RAL 7037	(144.4)	7
1	1	1	1	-	-	-	-		PA6-(GF) V0	RED SIM RAL 3000		
2	2	2	2	2	2	2	2	SHIELDING SLEEVE	Cu-ALLOY	TIN PLATED		6
4	4	4	4	4	4	4	4	COMPRESSION DELIMITER. HV HEADER	CARBON STEEL	ZnNi - PLATING		5
-	-	-	-	1	1	1	1	RADIAL SEAL 56.4 X 50	SILICONE RUBBER HB	NATURE		4 C1
1	1	1	1	-	-	-	-		SILICONE RUBBER V0	DARK GREY		
2	2	2	2	2	2	2	2	PIN DIA 8.0. PIN. M6	Cu-ALLOY	SILVER PLATED		3
-	-	-	-	2	-	2	-	PROTECTION COVER 8MM HV	PA6-(GF/GB) HB	NATURE		2 C1
-	-	-	-	-	2	-	2		PA6-(GF/GB) HB	BLACK SIM RAL 9005		
2	-	2	-	-	-	-	-		PA66 V0	WHITE SIM RAL 9010		
-	2	-	2	-	-	-	-		PA66 V0	BLACK SIM RAL 9005		
-	-	-	-	1	-	-	-	2POS.PIN DIA 8.0.PIN HSG.90. SEALED	PA66-GF HB	ORANGE SIM RAL 2003		1
-	-	-	-	-	1	-	-		PA66-GF HB			
-	-	-	-	-	-	1	-		PA66-GF HB			
-	-	-	-	-	-	-	1		PA66-GF HB			
1	-	-	-	-	-	-	-		PA66-GF V0			
-	1	-	-	-	-	-	-		PA66-GF V0			
-	-	1	-	-	-	-	-		PA66-GF V0			
-	-	-	1	-	-	-	-		PA66-GF V0			
4-2322122-4	4-2322122-3	4-2322122-2	4-2322122-1	1-2322122-4	1-2322122-3	1-2322122-2	1-2322122-1	DESCRIPTION	MATERIAL	SURFACE COLOUR	WEIGHT [g]	ITEM
D	C	B	A	D	C	B	A	CODING				
2POS.PIN DIA 8.0.PIN HSG.90.ASSY				DESCRIPTION								
QTY PER ASSY PARTS				PART LIST								

4-2322122-8	D	2POS.PIN DIA 8.0.PIN HSG.90.ASSY BUSBAR M6 PROTECTION CAP	-	9-2208100-1	2POS. PROTECTION CAP	PS	BLACK SIM RAL 9005	(3.3)	1	8
			3-2322122-4	-	2POS.PIN DIA 8.0.PIN HSG.90.ASSY BUSBAR M6	-	-	-	1	1-7
4-2322122-7	C	2POS.PIN DIA 8.0.PIN HSG.90.ASSY BUSBAR M6 PROTECTION CAP	-	9-2208100-1	2POS. PROTECTION CAP	PS	BLACK SIM RAL 9005	(3.3)	1	8
			3-2322122-3	-	2POS.PIN DIA 8.0.PIN HSG.90.ASSY BUSBAR M6	-	-	-	1	1-7
4-2322122-6	B	2POS.PIN DIA 8.0.PIN HSG.90.ASSY BUSBAR M6 PROTECTION CAP	-	9-2208100-1	2POS. PROTECTION CAP	PS	BLACK SIM RAL 9005	(3.3)	1	8
			3-2322122-2	-	2POS.PIN DIA 8.0.PIN HSG.90.ASSY BUSBAR M6	-	-	-	1	1-7
4-2322122-5	A	2POS.PIN DIA 8.0.PIN HSG.90.ASSY BUSBAR M6 PROTECTION CAP	-	9-2208100-1	2POS. PROTECTION CAP	PS	BLACK SIM RAL 9005	(3.3)	1	8
			3-2322122-1	-	2POS.PIN DIA 8.0.PIN HSG.90.ASSY BUSBAR M6	-	-	-	1	1-7

1-2322122-8	D	2POS.PIN DIA 8.0.PIN HSG.90.ASSY BUSBAR M6 PROTECTION CAP	-	9-2208100-1	2POS. PROTECTION CAP	PS	BLACK SIM RAL 9005	(3.3)	1	8
			1-2322122-4	-	2POS.PIN DIA 8.0.PIN HSG.90.ASSY BUSBAR M6	-	-	-	1	1-7
1-2322122-7	C	2POS.PIN DIA 8.0.PIN HSG.90.ASSY BUSBAR M6 PROTECTION CAP	-	9-2208100-1	2POS. PROTECTION CAP	PS	BLACK SIM RAL 9005	(3.3)	1	8
			1-2322122-3	-	2POS.PIN DIA 8.0.PIN HSG.90.ASSY BUSBAR M6	-	-	-	1	1-7
1-2322122-6	B	2POS.PIN DIA 8.0.PIN HSG.90.ASSY BUSBAR M6 PROTECTION CAP	-	9-2208100-1	2POS. PROTECTION CAP	PS	BLACK SIM RAL 9005	(3.3)	1	8
			1-2322122-2	-	2POS.PIN DIA 8.0.PIN HSG.90.ASSY BUSBAR M6	-	-	-	1	1-7
8-2322122-1	A	2POS.PIN DIA 8.0.PIN HSG.90.ASSY BUSBAR M6	1-2322122-1	-	2POS.PIN DIA 8.0.PIN HSG.90.ASSY BUSBAR M6	-	-	-	1	1-7
1-2322122-5	A	2POS.PIN DIA 8.0.PIN HSG.90.ASSY BUSBAR M6 PROTECTION CAP	-	9-2208100-1	2POS. PROTECTION CAP	PS	BLACK SIM RAL 9005	(3.3)	1	8
			1-2322122-1	-	2POS.PIN DIA 8.0.PIN HSG.90.ASSY BUSBAR M6	-	-	-	1	1-7
TE-ASSY-NO.	COD.	DESCRIPTION	TE-ASSY-NO.	TE-PART-NO.	DESCRIPTION	MATERIAL	SURFACE COLOUR	WEIGHT [g]	QTY	ITEM

C1

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: mm

TOLERANCES UNLESS OTHERWISE SPECIFIED:
1 PLC ±0.5
2 PLC ±0.5
3 PLC ±0.05
4 PLC ±0.005
ANGLES ±1°

MATERIAL: SEE TABLE

FINISH: SEE SHEET 2

DWN: J.LI 09APR2019
CHK: SY.WANG 24JUL2017
APVD: Y.YIN 02AUG2017
PRODUCT SPEC: -
APPLICATION SPEC: -
WEIGHT: -

TE Connectivity

NAME: 2POS.PIN DIA 8.0.PIN HSG.ASSY


SIZE A0 | CAGE CODE 00779 | DRAWING NO C-2322122 | RESTRICTED TO


CUSTOMER DRAWING,RESTRICTED CUSTOMER | SCALE 2:1 | SHEET 2 OF 4 | REV C1


4806 13/131

© 2019 TE Connectivity, All Rights Reserved.


REVISIONS						
P	LTR	DESCRIPTION	DATE	DWN	APVD
		SEE SHEET 1			

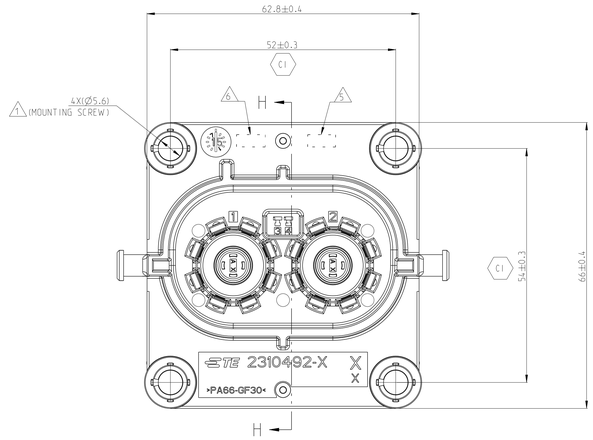







2-•-1 AS SHOWN

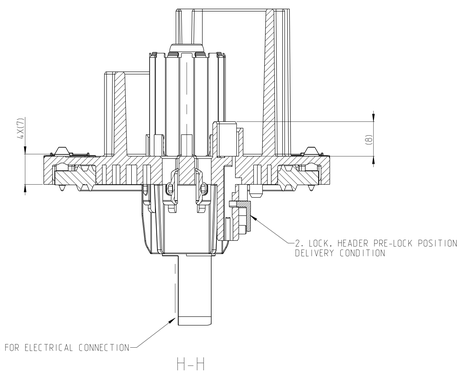

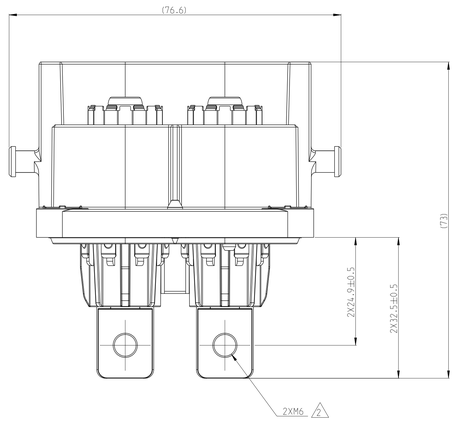

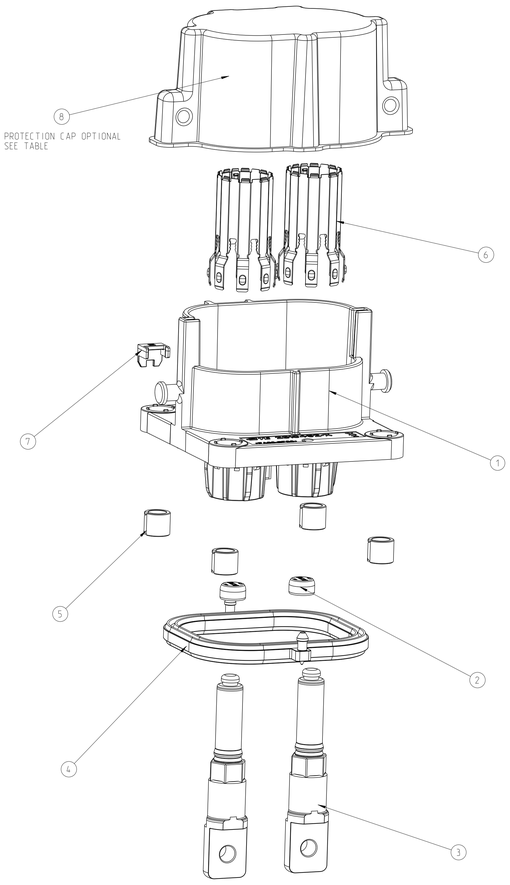

-	-	-	-	1	1	1	1	2. LOCK. IL. HEADER	PA6-(GF/GB) HB	GRAY SIM RAL 7037	(144.4)		7
1	1	1	1	-	-	-	-		PA6-(GF) V0	RED SIM RAL 3000			
2	2	2	2	2	2	2	2	SHIELDING SLEEVE	Cu-ALLOY	TIN PLATED			6
4	4	4	4	4	4	4	4	COMPRESSION DELIMITER. HV HEADER	CARBON STEEL	ZnNi - PLATING			5
-	-	-	-	1	1	1	1	RADIAL SEAL 56.4 X 50	SILICONE RUBBER HB	NATURE			4
1	1	1	1	-	-	-	-		SILICONE RUBBER V0	DARK GREY			
2	2	2	2	2	2	2	2	PIN DIA 8.0. PIN. M6	Cu-ALLOY	SILVER PLATED			3
-	-	-	-	2	-	2	-	PROTECTION COVER 8MM HV	PA6-(GF/GB) HB	NATURE			2
-	-	-	-	-	2	-	2		PA6-(GF/GB) HB	BLACK SIM RAL 9005			
2	-	2	-	-	-	-	-		PA66 V0	WHITE SIM RAL 9010			
-	2	-	2	-	-	-	-		PA66 V0	BLACK SIM RAL 9005			
-	-	-	-	1	-	-	-	2POS.PIN DIA 8.0.PIN HSG.90.SEALED	PA66-GF HB	ORANGE SIM RAL 2003			1
-	-	-	-	-	1	-	-		PA66-GF HB				
-	-	-	-	-	-	1	-		PA66-GF HB				
-	-	-	-	-	-	-	1		PA66-GF HB				
1	-	-	-	-	-	-	-		PA66-GF V0				
-	1	-	-	-	-	-	-		PA66-GF V0				
-	-	1	-	-	-	-	-		PA66-GF V0				
-	-	-	1	-	-	-	-		PA66-GF V0				
5-2322122-4	5-2322122-3	5-2322122-2	5-2322122-1	2-2322122-4	2-2322122-3	2-2322122-2	2-2322122-1	DESCRIPTION	MATERIAL	SURFACE COLOUR	WEIGHT (g)		ITEM
D	C	B	A	D	C	B	A	CODING					
2POS.PIN DIA 8.0.PIN HSG.90.ASSY				DESCRIPTION									
QTY PER ASSY PARTS				PART LIST									

C1

C1

5-2322122-8	D	2POS.PIN DIA 8.0.PIN HSG.90.ASSY BUSBAR M6 PROTECTION CAP	-	9-2208100-1	2POS. PROTECTION CAP	PS	BLACK SIM RAL 9005	(3.3)	1	8
			5-2322122-4	-	2POS.PIN DIA 8.0.PIN HSG.90.ASSY BUSBAR M6	-	-	-	1	1-7
5-2322122-7	C	2POS.PIN DIA 8.0.PIN HSG.90.ASSY BUSBAR M6 PROTECTION CAP	-	9-2208100-1	2POS. PROTECTION CAP	PS	BLACK SIM RAL 9005	(3.3)	1	8
			5-2322122-3	-	2POS.PIN DIA 8.0.PIN HSG.90.ASSY BUSBAR M6	-	-	-	1	1-7
5-2322122-6	B	2POS.PIN DIA 8.0.PIN HSG.90.ASSY BUSBAR M6 PROTECTION CAP	-	9-2208100-1	2POS. PROTECTION CAP	PS	BLACK SIM RAL 9005	(3.3)	1	8
			5-2322122-2	-	2POS.PIN DIA 8.0.PIN HSG.90.ASSY BUSBAR M6	-	-	-	1	1-7
5-2322122-5	A	2POS.PIN DIA 8.0.PIN HSG.90.ASSY BUSBAR M6 PROTECTION CAP	-	9-2208100-1	2POS. PROTECTION CAP	PS	BLACK SIM RAL 9005	(3.3)	1	8
			5-2322122-1	-	2POS.PIN DIA 8.0.PIN HSG.90.ASSY BUSBAR M6	-	-	-	1	1-7

2-2322122-8	D	2POS.PIN DIA 8.0.PIN HSG.90.ASSY BUSBAR M6 PROTECTION CAP	-	9-2208100-1	2POS. PROTECTION CAP	PS	BLACK SIM RAL 9005	(3.3)	1	8
			2-2322122-4	-	2POS.PIN DIA 8.0.PIN HSG.90.ASSY BUSBAR M6	-	-	-	1	1-7
2-2322122-7	C	2POS.PIN DIA 8.0.PIN HSG.90.ASSY BUSBAR M6 PROTECTION CAP	-	9-2208100-1	2POS. PROTECTION CAP	PS	BLACK SIM RAL 9005	(3.3)	1	8
			2-2322122-3	-	2POS.PIN DIA 8.0.PIN HSG.90.ASSY BUSBAR M6	-	-	-	1	1-7
2-2322122-6	B	2POS.PIN DIA 8.0.PIN HSG.90.ASSY BUSBAR M6 PROTECTION CAP	-	9-2208100-1	2POS. PROTECTION CAP	PS	BLACK SIM RAL 9005	(3.3)	1	8
			2-2322122-2	-	2POS.PIN DIA 8.0.PIN HSG.90.ASSY BUSBAR M6	-	-	-	1	1-7
2-2322122-5	A	2POS.PIN DIA 8.0.PIN HSG.90.ASSY BUSBAR M6 PROTECTION CAP	-	9-2208100-1	2POS. PROTECTION CAP	PS	BLACK SIM RAL 9005	(3.3)	1	8
			2-2322122-1	-	2POS.PIN DIA 8.0.PIN HSG.90.ASSY BUSBAR M6	-	-	-	1	1-7
TE-ASSY-NO.	COD.	DESCRIPTION	TE-ASSY-NO.	TE-PART-NO.	DESCRIPTION	MATERIAL	SURFACE COLOUR	WEIGHT (g)	QTY	ITEM

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: mm

TOLERANCES UNLESS OTHERWISE SPECIFIED:
X PLC ±0.5
2 PLC ±0.5
3 PLC ±0.254
4 PLC ±0.0001
ANGLES 4°
FINISH

MATERIAL: SEE TABLE

FINISH_spec: -

DWN	LLI	09APR2019
CHK	SY.WANG	24JUL2017
APVD	LYIN	02AUG2017
PRODUCT SPEC	A1	-
APPLICATION SPEC	A2	-
BEI/SPI		

TE Connectivity

NAME: 2POS.PIN DIA 8.0.PIN HSG.ASSY

SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A0	00779	C-2322122	

CUSTOMER DRAWING:RESTRICTED CUSTOMER | SCALE: 2:1 | SHEET 3 OF 4 | REV C1

4806 (3/13)


© 2019 TE Connectivity, All Rights Reserved.

REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
		SEE SHEET 1			


CODING DEFINITION FOR ALL VARIANT

ACCORDING TO INTERFACE DRAWING: 114-94034 AND 114-94032


CODING A

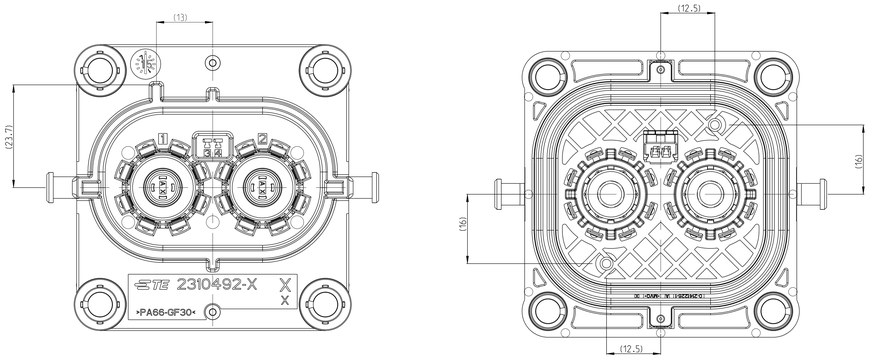


CODING C

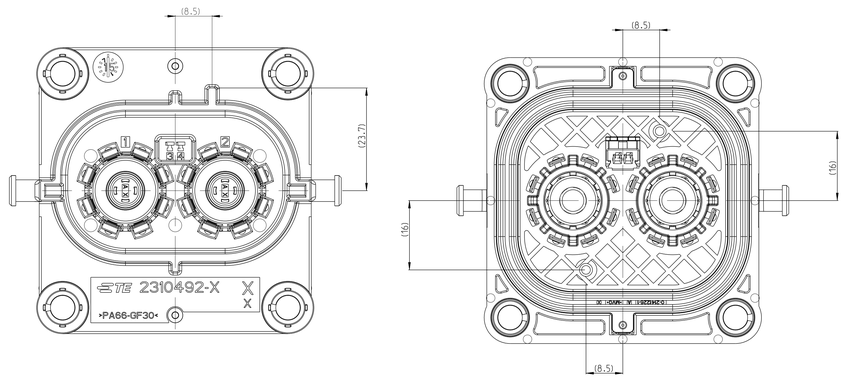

CODING B

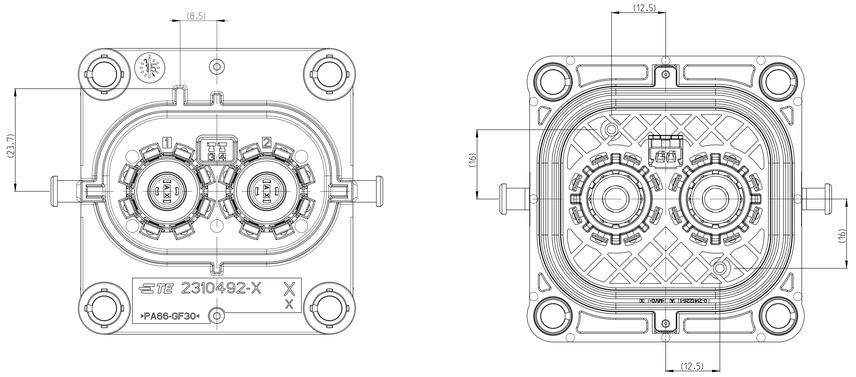

CODING D

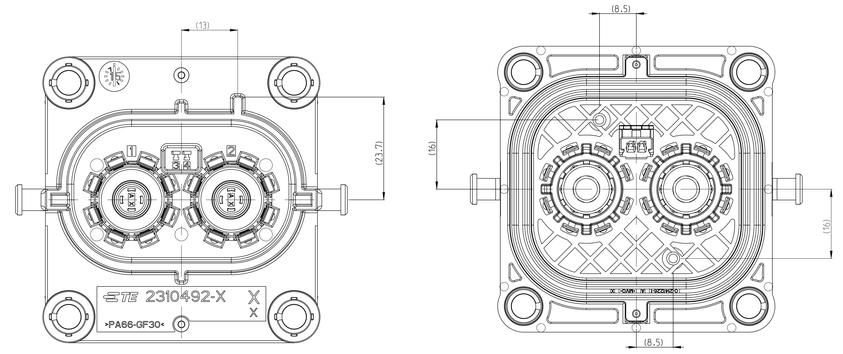

THIS DRAWING IS A CONTROLLED DOCUMENT.	DWN: LI 09APR2019	TE Connectivity	
DIMENSIONS: mm	CHK: SY.WANG 24JUL2017	NAME: 2POS.PIN DIA 8.0.PIN HSG.ASSY	
TOLERANCES UNLESS OTHERWISE SPECIFIED: 1 PLC ±0.5; 2 PLC ±0.25; 3 PLC ±0.127; 4 PLC ±0.0005; ANGLES 4°	APVD: LYIN 02AUG2017	PRODUCT SPEC: - (11)	
MATERIAL: SEE TABLE -	FINISH: SEE TABLE -	APPLICATION SPEC: - (12)	
		HISTORY	
		CUSTOMER DRAWING:RESTRICTED CUSTOMER	SIZE: A0 · CAGE CODE: 00779 · DRAWING NO: C-2322122 · RESTRICTED TO · SCALE: 2:1 · SHEET: 4 of 4 · REV: C1