
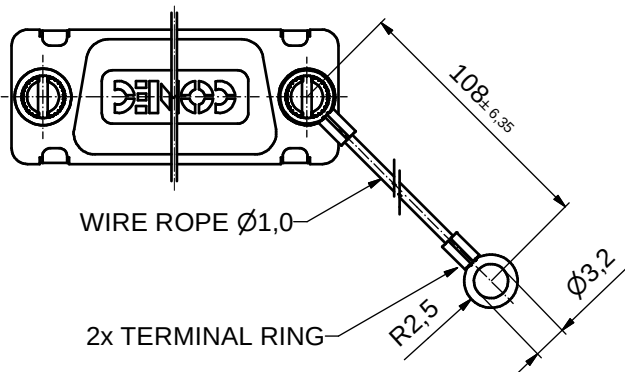

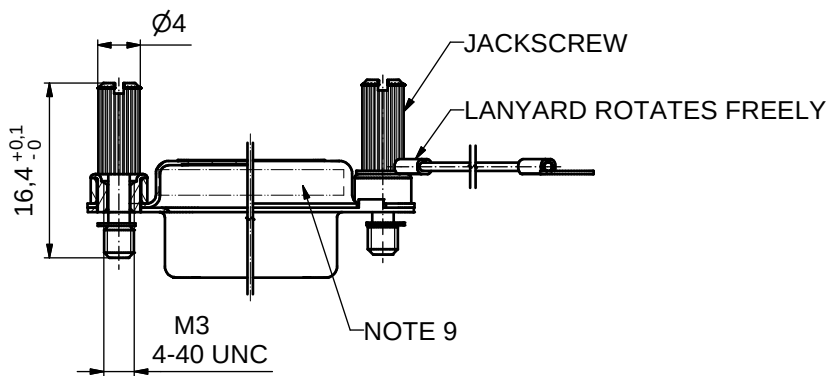
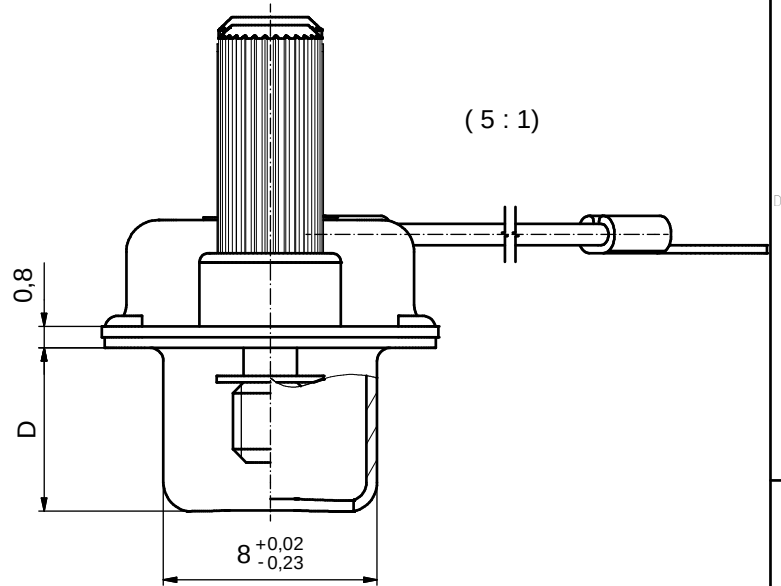


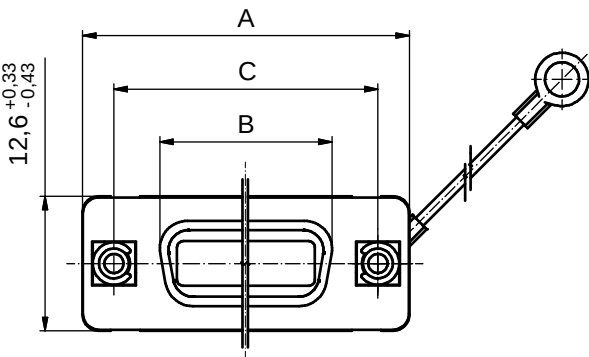

No. of pos.	A -0,76	B -0,25	C	D -0,3
9	31,19	16,46	25,00 ^{+0,12} _{-0,10}	6,12
15	39,52	24,79	33,30 ^{+0,15}	6,12
25	53,42	38,50	47,04 ± 0,13	5,99
37	69,70	54,96	63,50 ^{+0,13} _{-0,11}	5,99

Directive 2002/95/EC
„RoHS“
Compliant

NOTES:

- METALSHELLS: COPPER ALLOY; min. 315µin TIN over 40-80µin NICKEL
- THREADED INSERT: COPPER ALLOY; min. 200µin TIN over 80µin NICKEL
- COLLAR: COPPER ALLOY; min. 200µin TIN over 80µin NICKEL
- JACKSCREW: STAINLESS STEEL 1.4305
- WIRE ROPE: STAINLESS STEEL 1.4401
- RETAINING WASHER: STAINLESS STEEL 1.4122
- TERMINAL RING: UNINSULATED, COPPER ALLOY; min. 200µinTIN over 80µin NICKEL
- MAXIMUM TORQUE VALUE FOR THREAD: 6in.LB
- CONNECTOR IS PART MARKED: **PART NO. CONEC ABC**

Part No. for plug connector		
No. of pos.	UNC 4-40	M 3
9	16-000380	16-000330
15	16-000390	16-000340
25	16-000400	16-000350
37	16-000410	16-000360

APPROVAL # FREIGABE # DEBLOCAGE # AUTORIZACION # APPROVAL	
CUSTOMER APPROVAL DATE:	
NAME:	TITLE:
COMPANY NAME:	
APPROVAL # FREIGABE # DEBLOCAGE # AUTORIZACION # APPROVAL	

THIS DRAWING MAY NOT BE COPIED OR REPRODUCED IN ANY WAY, AND MAY NOT BE PASSED ON TO A THIRD PARTY WITHOUT WRITTEN PERMISSION. OWNERSHIP AND COPYRIGHT OF CONEC GmbH

DO NOT ALTER CAD DRAWING BY HAND				tolerance	dim. in mm	
				ISO 2768-m	date	name
1 x b	A 3186	17.11.2008	Petker	drawn	02.05.08	Sonnenberg
a	Origin			appd.	02.05.08	Fischer
rev.	description	date	name	norm		
				d-old		

scale:	2:1 (5:1)	
material:	SEE NOTES	
title:	SCREEN CAP 9-37pos. FOR PLUG CONNECTOR with threaded insert, jack screw and wire rope	
dwg no:	Inventor 10	DIN-A3
	16K1A2293	sh: 1
part no:	see table	