
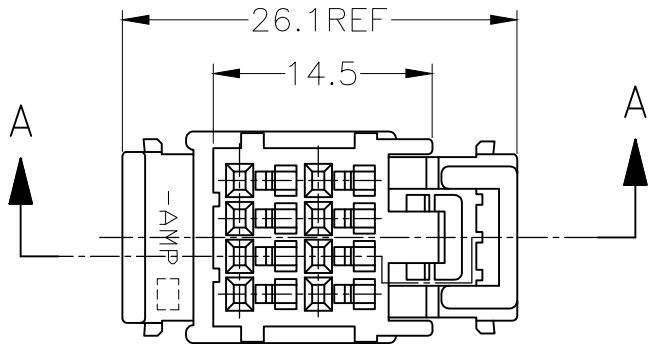
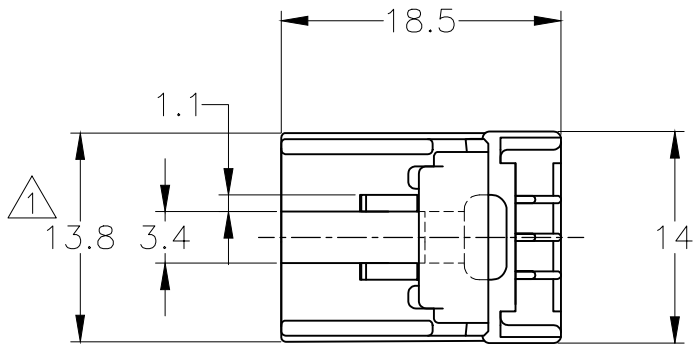
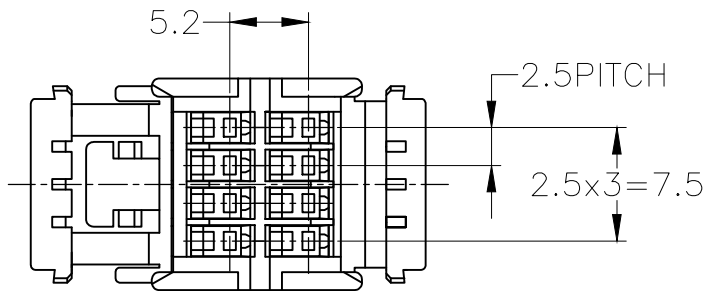
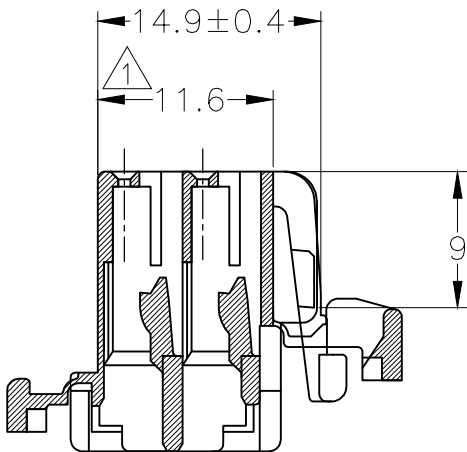
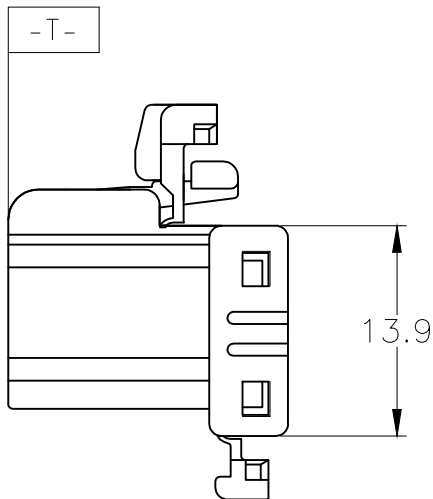


REVISIONS					
P	LTR	DESCRIPTION		DATE	APVD
	D4	OBSOLETED	-5	ECR-20-007046	11NOV2020
				PSJ	TM

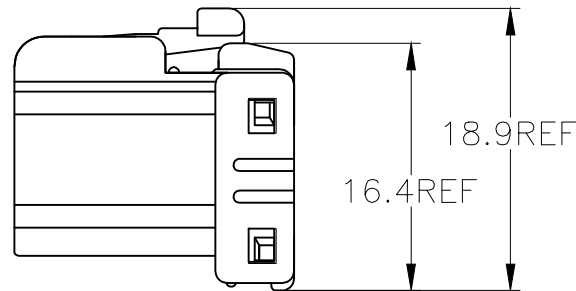


DOUBLE LOCKED
二重ロック時

1. TO BE MEASURED WITHIN 2mm FROM -T-
2. APPLICABLE PRODUCT SPECIFICATION NIUMBER: 108-5244
3. APPLICABLE INSTRUCTION SHEET NUMBER: 411-5883
4. APPLICABLE CONTACT PART NUMBER: 173681, 175180
5. THE MATING CAP HOUSING NUMBERS: 174971, 174049, 176121 AND 178455

1. -T- 面より 2mm の範囲で測定
2. 適用製品規格番号: 108-5244
3. 適用取扱説明書番号: 411-5883
4. 適用端子型番: 173681, 175180
5. 嵌合相手ハウジング型番: 174971, 174049, 176121 AND 178455

TOLERANCE UNLESS OTHERWISE SPECIFIED: 一般公差	
0 < x ≤ 10	± 0.2
10 < x ≤ 30	± 0.25
30 < x ≤ 100	± 0.3
ANGLE ; 角度	± 3°

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN T.SHINOHARA	04FEB2013	 TE Connectivity		
DIMENSIONS: mm		CHK K.BETSUI	04FEB2013	NAME 040 SERIES MULTI-LOCK CONNECTOR 8POSITION PLUG HOUSING		
		APVD K.BETSUI	04FEB2013	SIZE A3		
		PRODUCT SPEC SEE NOTE 2				
MATERIAL PBT		APPLICATION SPEC -		CAGE CODE 00779	DRAWING NO C-174044	RESTRICTED TO -
		WEIGHT 2.3 g		SCALE 2:1	SHEET 1 OF 1	REV D4
		CUSTOMER DRAWING				