


LOC	DIST	REVISIONS					
P	LTR	DESCRIPTION			DATE	DWN	APVD
		P	P	REVISED PER ECO-11-005027		11MAR11	RK HMR

NOTES:


MATERIALS:
HOUSING: POLYAMIDE, UL94V-0.
TERMINALS: COPPER ALLOY, TIN PLATED.
SCREWS: STEEL, ZINC PLATED.

ELECTRICAL:
RATING: 20A, 150V(300V LIMITED RATING)
UL & CSA.

MECHANICAL:
WIRE RANGE: 14-22 AWG.
MAXIMUM TIGHTENING TORQUE: 7 IN-LBS.

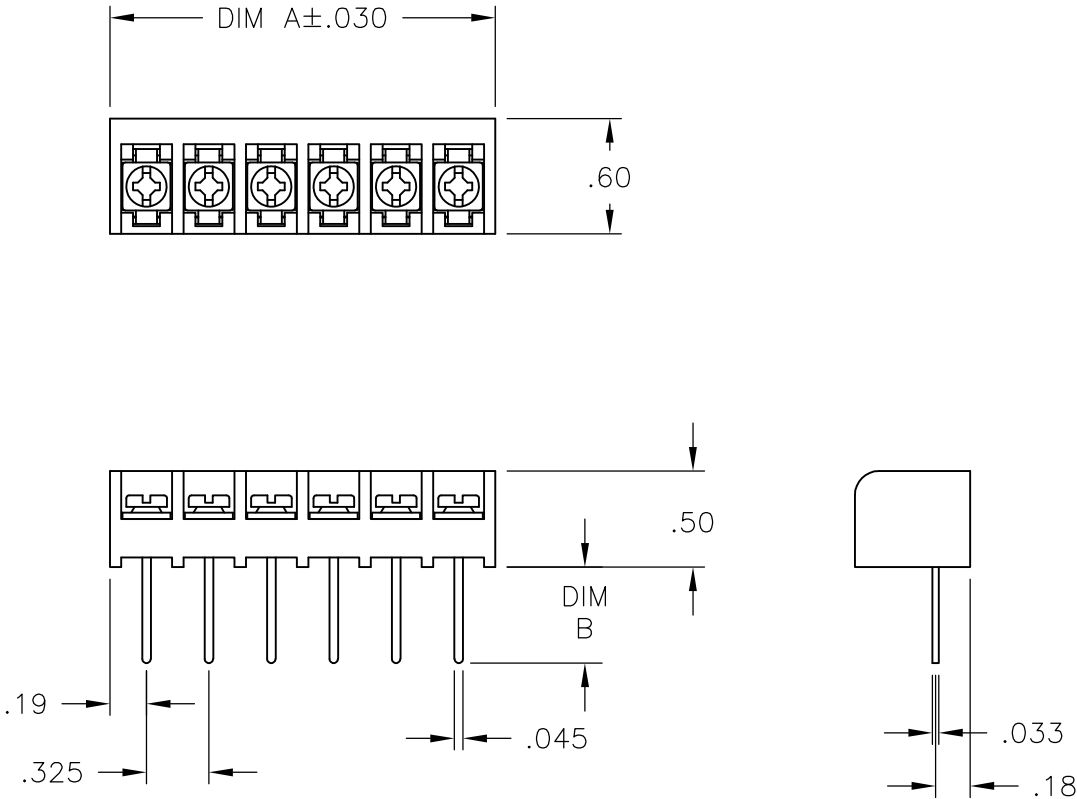

.500±.010	9.811	30	4WWV-30-008	4-796598-8
	9.486	29	4WWV-29-008	4-796598-7
	9.161	28	4WWV-28-008	4-796598-6
	8.836	27	4WWV-27-008	4-796598-5
	8.511	26	4WWV-26-008	4-796598-4
	8.186	25	4WWV-25-008	4-796598-3
	7.861	24	4WWV-24-008	796598-6
	7.536	23	4WWV-23-008	4-796598-2
	7.211	22	4WWV-22-008	4-796598-1
	6.886	21	4WWV-21-008	4-796598-0
	6.561	20	4WWV-20-008	3-796598-9
	6.236	19	4WWV-19-008	3-796598-8
	5.911	18	4WWV-18-008	3-796598-7
	5.586	17	4WWV-17-008	3-796598-6
	5.261	16	4WWV-16-008	7-1437649-5
	4.936	15	4WWV-15-008	3-796598-5
	4.611	14	4WWV-14-008	1-1546158-9
	4.286	13	4WWV-13-008	3-796598-4
	3.961	12	4WWV-12-008	3-796598-3
	3.636	11	4WWV-11-008	3-796598-2
.394±.010 .500±.010 .500±.010 .500±.010	3.311	10	4WWV-10-305	6-1437649-9
	3.311	10	4WWV-10-008	1546119-4
	2.986	9	4WWV-09-008	3-796598-1
	2.661	8	4WWV-08-304	6-1437649-6
	2.661	8	4WWV-08-008	1-1546158-8
	2.336	7	4WWV-07-008	3-796598-0
	2.011	6	4WWV-06-008	1-1546158-6
	1.686	5	4WWV-05-008	5-1437649-9
	1.361	4	4WWV-04-008	4-796598-9
	1.361	4	4WWV-04-008	5-1437649-5
	1.036	3	4WWV-03-008	1-1546158-5
	.711	2	4WWV-02-008	2-796598-9
DIM "B"	DIM. "A"	NO. OF POS.	CATALOG NUMBER	PART NO.

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN S SCHLEGEL	5/19/04	TE Connectivity				
DIMENSIONS: INCHES		CHK S YODER	5/19/04	NAME				
		APVD S YODER	5/19/04					
		PRODUCT SPEC —		4WWV-XX-008 ASSEMBLY				
MATERIAL —		APPLICATION SPEC —						
		WEIGHT —		SIZE A3	CAGE CODE 00779	DRAWING NO C-5-1437649-5	RESTRICTED TO —	
FINISH —		CUSTOMER DRAWING				SCALE NTS	SHEET 1 OF 1	REV P