

© 2021 TE Connectivity. All Rights Reserved.

REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	C	ADDED NEW PN 1775485-7	08DEC2025	M.S	J.M

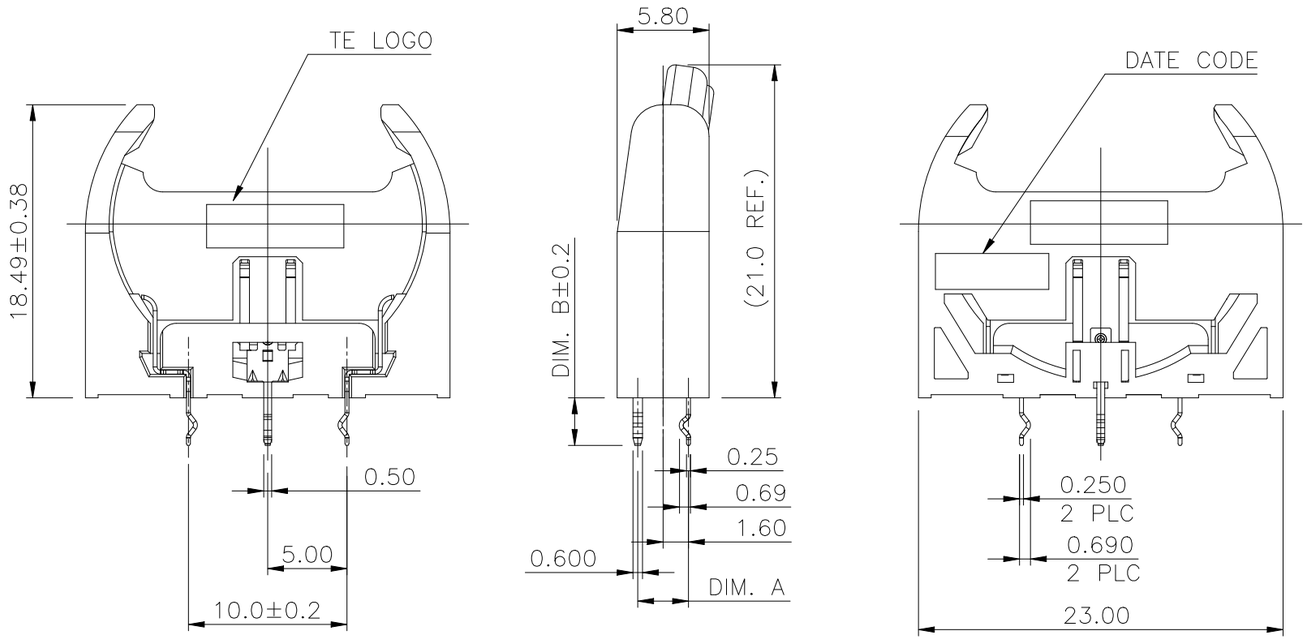


NOTES :
1. MATERIAL :
   1.1 HOUSING: MATERIAL AND COLOR: SEE TABLE, UL94 V-0
   1.2 CONTACT: STAINLESS STEEL
2. FINISH : CONTACT
   △2.1 GOLD FLASH PLATING ON CONTACT AREA,
   2.54um [100u"] MIN. MATTE-TIN PLATING ON SOLDERING AREA.
   0.76um [30u"] MIN. NICKEL UNDERPLATING OVERALL.
   △2.2 GOLD PLATING 0.125um [5u"] MIN.ON CONTACT AREA,
   2.54um [100u"] MIN. MATTE-TIN PLATING ON SOLDERING AREA.
   1.25um [50u"] MIN. NICKEL UNDERPLATING OVERALL.
   © △2.3 0.762um [30u"] MIN. GOLD PLATING ON CONTACT AREA,
   2.54um [100u"] MIN. MATTE-TIN ON SOLDERTAIL.
   1.25um [50u"] MIN. NICKEL UNDERPLATING OVERALL.
3. WAVE SOLDER CAPABLE TO 265°C PER TE SPEC. 109-202, CONDITION B.
4. RECOMMENDED PCB THICKNESS: 1.6mm
5. SUITABLE FOR BATTERY NO.: CR2032.
△6. LOW PCB RETENTION FORCE.

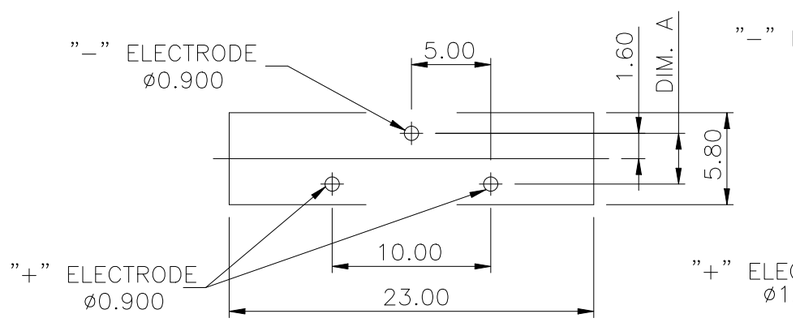


RECOMMENDED PCB HOLE LAYOUT

PCB TOLERANCE ±0.05

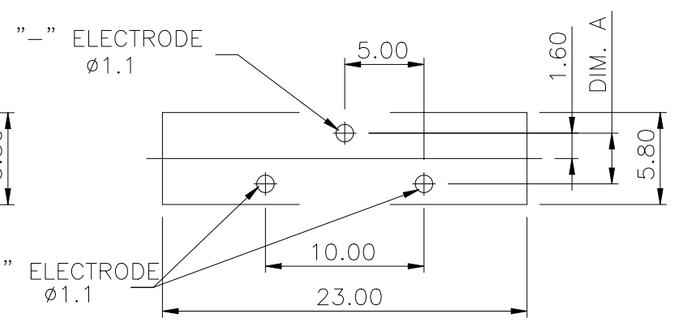

△6. RECOMMENDED PCB HOLE LAYOUT

PCB TOLERANCE ±0.05

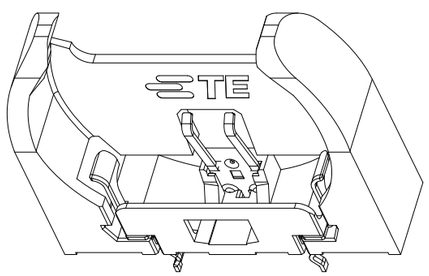

△2.1	3.0 mm	3.2 mm	PA-66 & BLACK	2-1775485-4
© △2.3	3.6 mm	3.6 mm	PA-66 & BLACK	1775485-7
△2.2				1775485-5
△2.1				2-1775485-1
△2.1	3.0 mm	3.2 mm	PA-66 & 2718C BLUE	1-1775485-2
			PA-66 & BLACK	1-1775485-1
△2.1	3.0 mm	3.6 mm	PA-66 & 2718C BLUE	1775485-2
△2.2			PA-66 & BLACK	1775485-4
△2.1				1775485-1
FINISHED	DIM B	DIM A	HOUSING MATERIAL&COLOR	PART NO.

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: mm

TOLERANCES UNLESS OTHERWISE SPECIFIED:

0 PLC	± –
1 PLC	± 0.38
2 PLC	± 0.25
3 PLC	± 0.15
4 PLC	± –
ANGLES	± 2°

MATERIAL: SEE NOTE

FINISH: SEE NOTE

DWN	S. CHIEN	03JUN2008
CHK	W.KODAMA	03JUN2008
APVD	S. CHIEN	03JUN2008
PRODUCT SPEC	108-57542	
APPLICATION SPEC	–	
WEIGHT	1.19 GRAMS	
CUSTOMER DRAWING		

TE Connectivity Ltd.

NAME: BATTERY HOLDER, H=18.5mm, V/T


– –


SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A3	00779	©-1775485	–


SCALE	SHEET	REV
1:1	1 OF 5	C

© 2021 TE Connectivity. All Rights Reserved.


REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	–	SEE SHEET 1	–	—	—

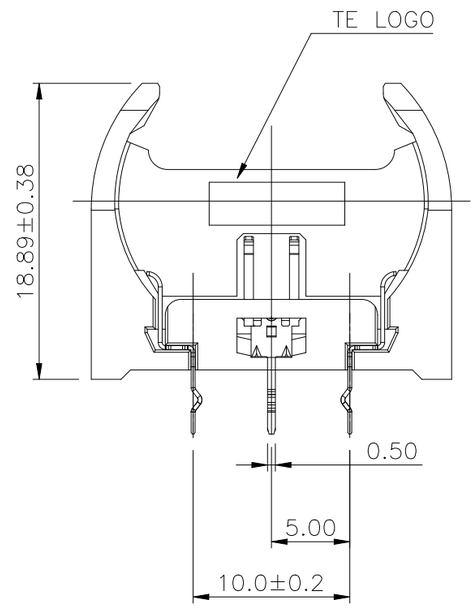

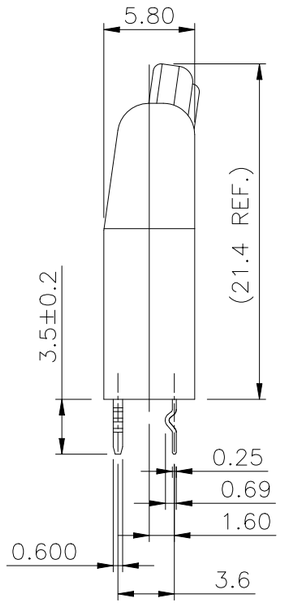


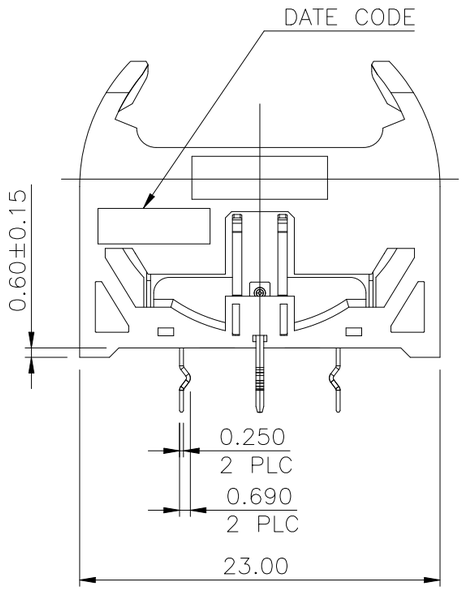

NOTES :
1. MATERIAL :
   1.1 HOUSING: UL94 V–0, PA SERIES COLOR: SEE TABLE
   1.2 CONTACT: STAINLESS STEEL
2. FINISH :
   2.1 CONTACT
   GOLD FLASH PLATING ON CONTACT AREA,
   2.54um [100u"] MIN. MATTE–TIN PLATING ON SOLDERING AREA.
   0.76um [30u"] MIN. NICKEL UNDERPLATING OVERALL.
3. WAVE SOLDER CAPABLE TO 265°C PER TE SPEC. 109–202, CONDITION B.
4. RECOMMENDED PCB THICKNESS: 1.6mm
5. SUITABLE FOR BATTERY NO.: CR2032.
6. LOW PCB RETENTION FORCE.

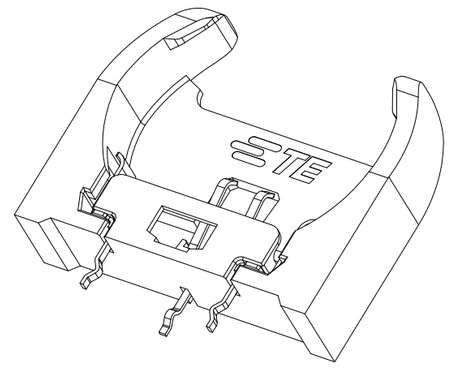


PRODUCT AS SHOWN
(0.60mm Height Standoff)

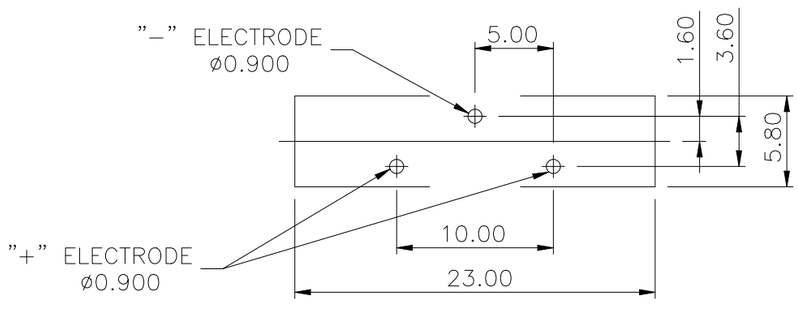

RECOMMENDED PCB HOLE LAYOUT

PCB TOLERANCE ±0.05

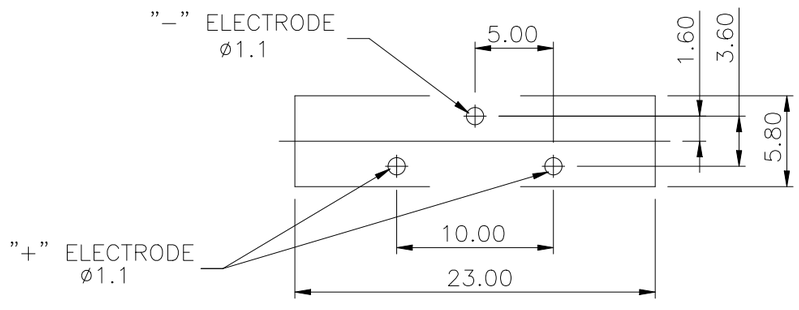

6. RECOMMENDED PCB HOLE LAYOUT

PCB TOLERANCE ±0.05

SOFT TRAY	1775485–3
PACKING	PART NO.

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: mm

TOLERANCES UNLESS OTHERWISE SPECIFIED:

0 PLC	± –
1 PLC	± 0.38
2 PLC	± 0.25
3 PLC	± 0.15
4 PLC	± –
ANGLES	± 2°

MATERIAL: SEE NOTE

FINISH: SEE NOTE

DWN	S. CHIEN 03JUN2008
CHK	W.KODAMA 03JUN2008
APVD	S. CHIEN 03JUN2008
PRODUCT SPEC	108–57542
APPLICATION SPEC	—
WEIGHT	1.19 GRAMS

TE Connectivity Ltd.


NAME: BATTERY HOLDER, H=18.5mm, V/T
–
–


SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A3	00779	C–1775485	—


CUSTOMER DRAWING | SCALE 1:1 | SHEET 2 OF 5 | REV C

© 2021 TE Connectivity. All Rights Reserved.


REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	–	SEE SHEET 1	–	—	—

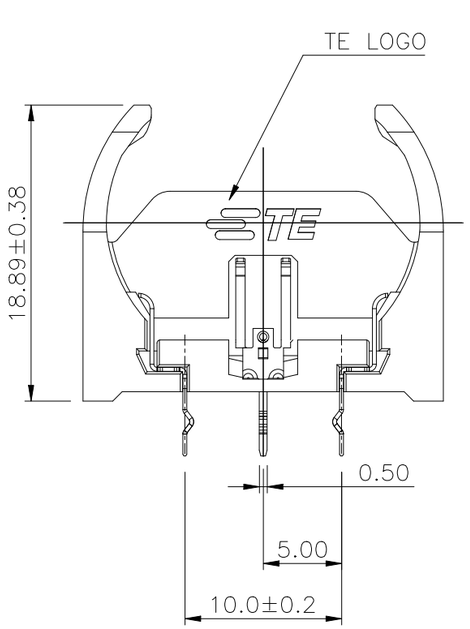

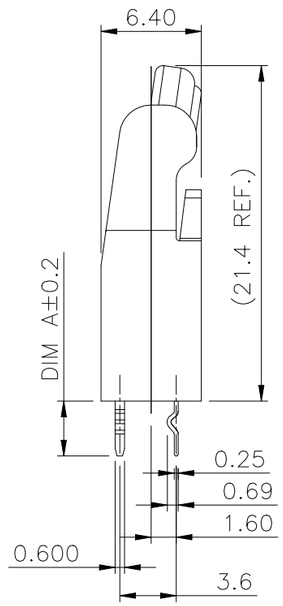

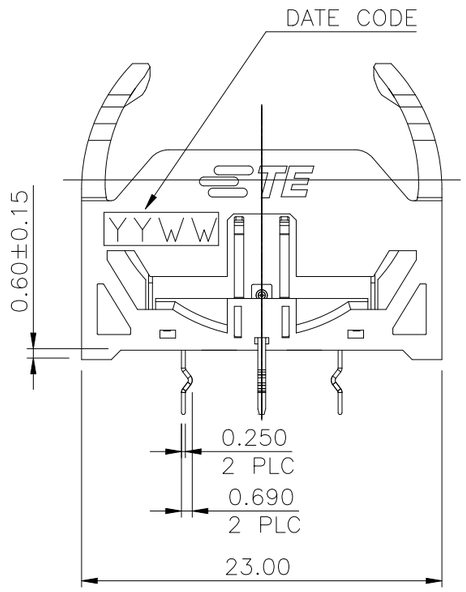


NOTES :
1. MATERIAL :
   1.1 HOUSING: UL94 V–0, PA SERIES COLOR: SEE TABLE
   1.2 CONTACT: STAINLESS STEEL
2. FINISH :
   2.1 CONTACT
   GOLD FLASH PLATING ON CONTACT AREA,
   2.54um [100u"] MIN. MATTE–TIN PLATING ON SOLDERING AREA.
   0.76um [30u"] MIN. NICKEL UNDERPLATING OVERALL.
3. WAVE SOLDER CAPABLE TO 265°C PER TE SPEC. 109–202, CONDITION B.
4. RECOMMENDED PCB THICKNESS: 1.6mm
5. SUITABLE FOR BATTERY NO.: CR2032.
6. LOW PCB RETENTION FORCE.
7. 3–1775485–2 AND 4–1775485–2 ARE PRELIMINARY PART

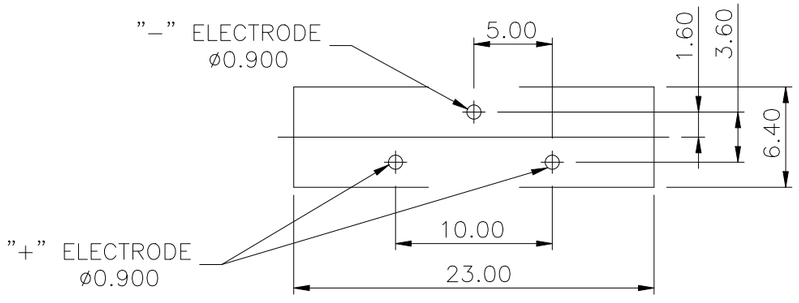


RECOMMENDED PCB HOLE LAYOUT

PCB TOLERANCE ±0.05

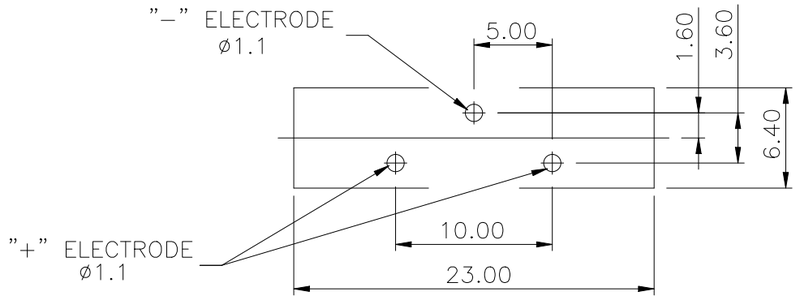

6. RECOMMENDED PCB HOLE LAYOUT

PCB TOLERANCE ±0.05

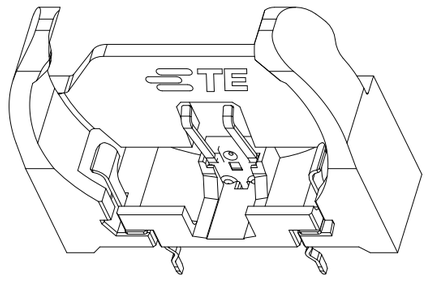

DIM A	HOUSING COLOR	PART NO.
3.00	PA10T HF& BLACK	3–1775485–2
3.50	PA10T HF&2718C BLUE	2–1775485–2

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: mm

TOLERANCES UNLESS OTHERWISE SPECIFIED:

0 PLC	± –
1 PLC	± 0.38
2 PLC	± 0.25
3 PLC	± 0.15
4 PLC	± –
ANGLES	± 2°

MATERIAL: SEE NOTE

FINISH: SEE NOTE

DWN S. CHIEN	03JUN2008
CHK W.KODAMA	03JUN2008
APVD S. CHIEN	03JUN2008
PRODUCT SPEC	108–57542
APPLICATION SPEC	—
WEIGHT	1.19 GRAMS

TE Connectivity Ltd.


NAME: BATTERY HOLDER, H=18.5mm, V/T
–
–


SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A3	00779	C–1775485	—


CUSTOMER DRAWING | SCALE 1:1 | SHEET 3 OF 5 | REV C

© 2021 TE Connectivity. All Rights Reserved.


REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	–	SEE SHEET 1	–	—	—

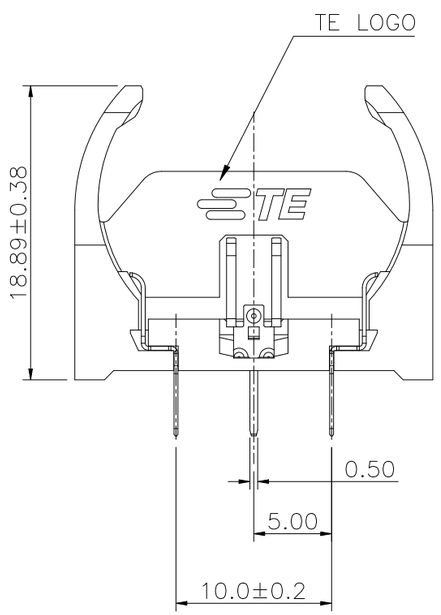

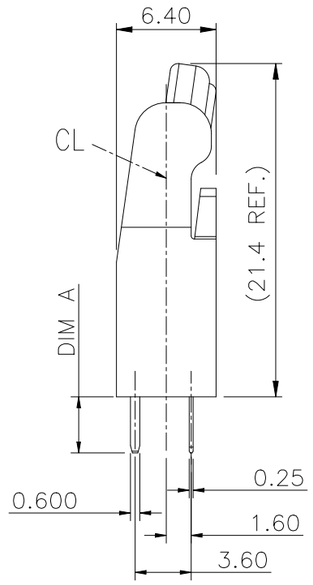

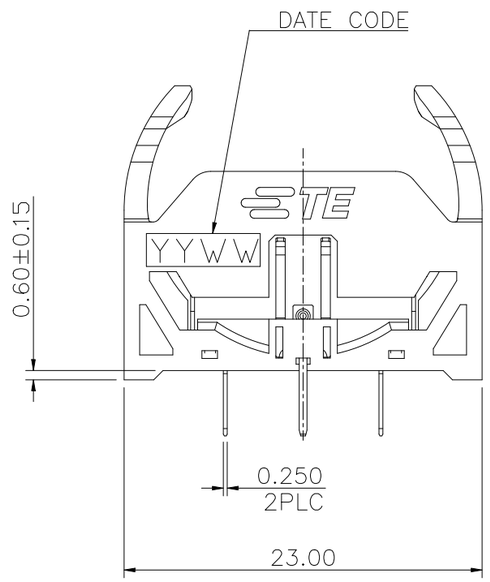


NOTES :
1. MATERIAL :
   1.1 HOUSING: UL94 V–0, PA SERIES COLOR: SEE TABLE
   1.2 CONTACT: STAINLESS STEEL
2. FINISH :
   2.1 CONTACT
   GOLD FLASH PLATING ON CONTACT AREA,
   2.54um [100u"] MIN. MATTE–TIN PLATING ON SOLDERING AREA.
   0.76um [30u"] MIN. NICKEL UNDERPLATING OVERALL.
3. WAVE SOLDER CAPABLE TO 265°C PER TE SPEC. 109–202, CONDITION B.
4. RECOMMENDED PCB THICKNESS: 1.6mm
5. SUITABLE FOR BATTERY NO.: CR2032.
6. LOW PCB RETENTION FORCE.
7. 1775485–6 IS PRELIMINARY PART.

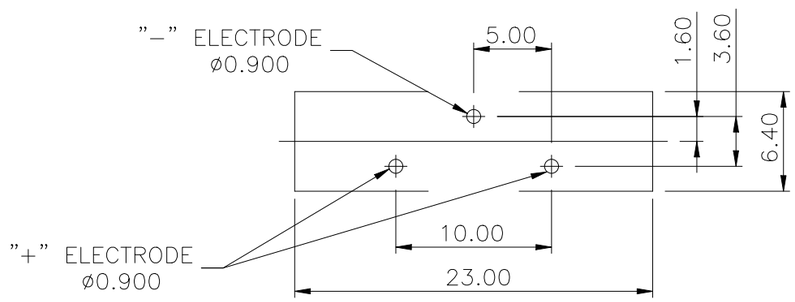


RECOMMENDED PCB HOLE LAYOUT

PCB TOLERANCE ±0.05

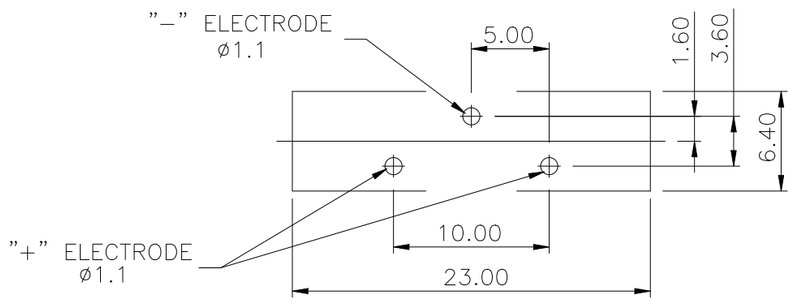

6 RECOMMENDED PCB HOLE LAYOUT

PCB TOLERANCE ±0.05

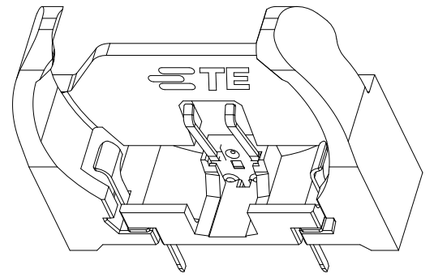

DIM A	HOUSING COLOR	PART NO.
2.40	PA10T HF&2718C BLUE	1–1775485–6
3.60	PA10T HF&2718C BLUE	1775485–6

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: mm

TOLERANCES UNLESS OTHERWISE SPECIFIED:

0 PLC	± –
1 PLC	± 0.38
2 PLC	± 0.25
3 PLC	± 0.15
4 PLC	± –
ANGLES	± 2°

MATERIAL: SEE NOTE

FINISH: SEE NOTE

DWN S. CHIEN	03JUN2008
CHK W.KODAMA	03JUN2008
APVD S. CHIEN	03JUN2008
PRODUCT SPEC	108–57542
APPLICATION SPEC	—
WEIGHT	1.19 GRAMS

TE Connectivity Ltd.


NAME: BATTERY HOLDER, H=18.5mm, V/T
–
–

SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A3	00779	C–1775485	—

CUSTOMER DRAWING | SCALE 1:1 | SHEET 4 OF 5 | REV C


© 2021 TE Connectivity. All Rights Reserved.

REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	–	SEE SHEET 1	–	—	—

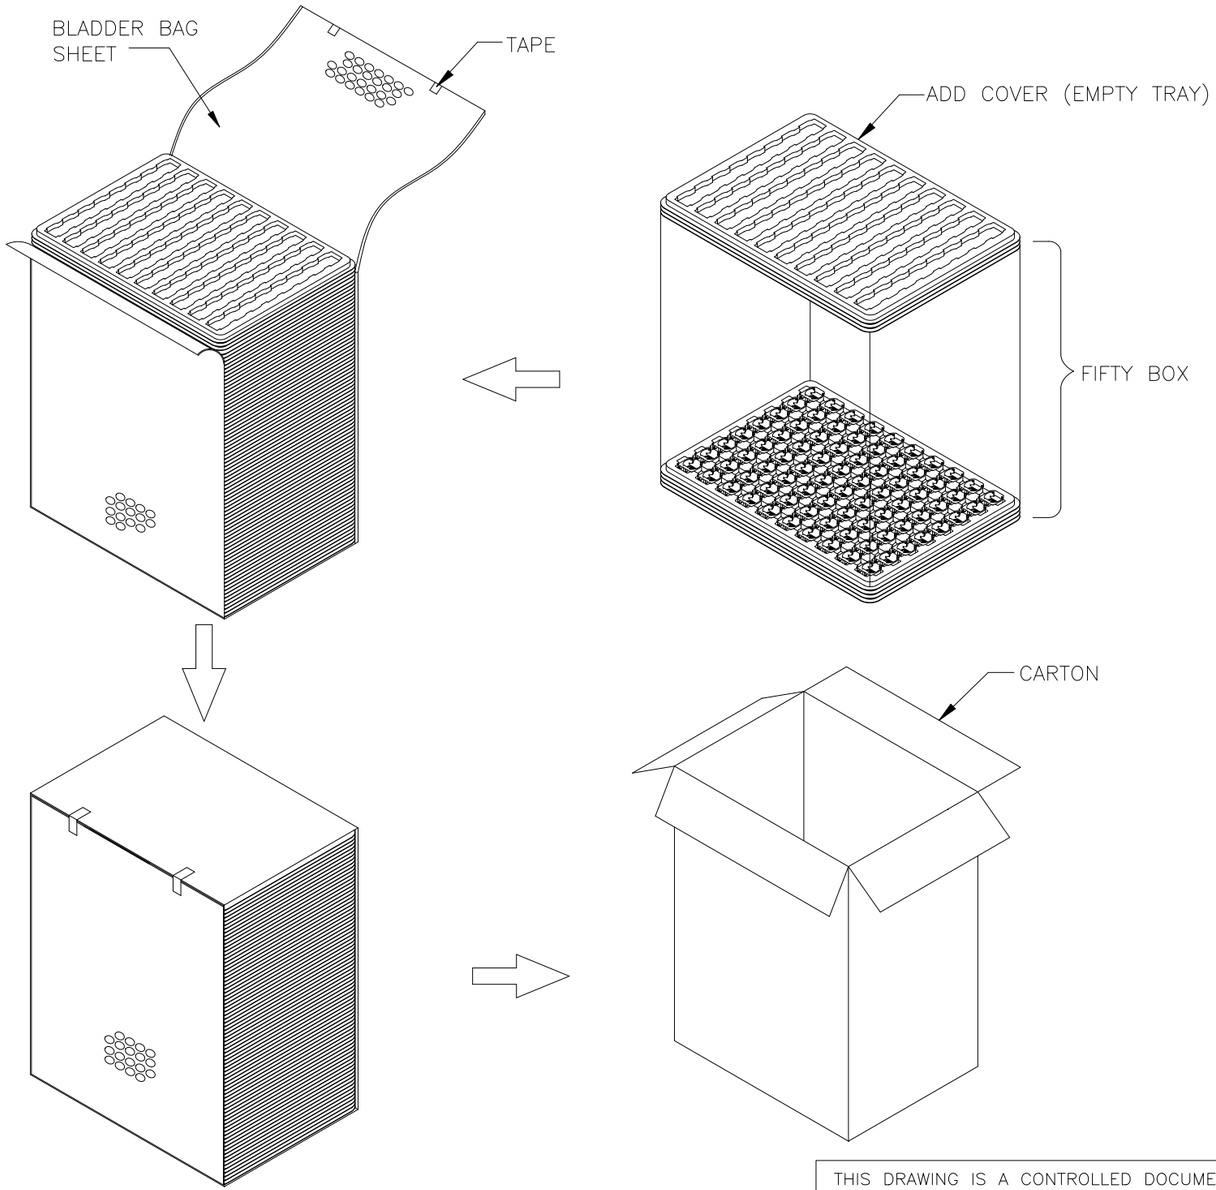


NOTES :

1. MATERIAL:
   - 1.1 TRAY:
     - 1775485–1/1775485–2/1775485–4/1775485–5 SOFT TRAY
     - 1–1775485–1/1–1775485–2/2–1775485–1 SOFT TRAY
     - 2–1775485–2/1775485–3/1775485–6/1–1775485–6 SOFT TRAY
     - Ⓒ 1775485–7 SOFT TRAY
     - 3–1775485–2 SOFT TRAY
     - 2–1775485–4 HARD TRAY
   - 1.2 SHIPPING CARTON: CORRUGATED FIBERBOARD
2. QUANTITY:
   - 2.1 PRIMARY PACKING: 80 PCS/TRAY SOFT TRAY
     100 PCS/TRAY HARD TRAY
   - 2.2 SECONDARY PACKING: 50 TRAY/CARTON(4,000PCS)
     20 TRAY/CARTON(2,000PCS)

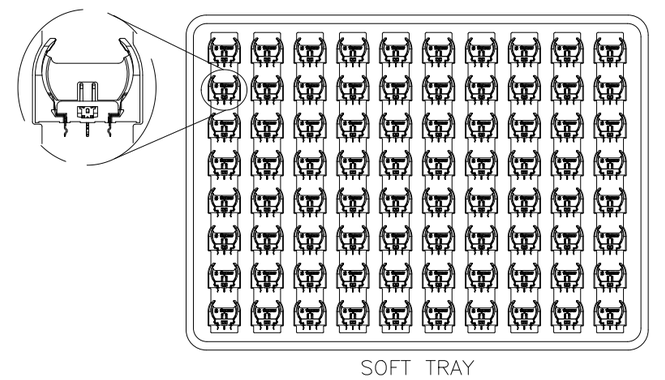

SOFT TRAY

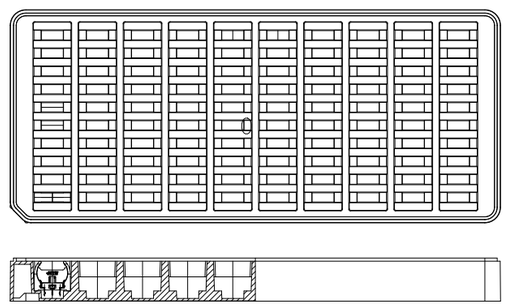

HARD TRAY

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN S. CHIEN 03JUN2008	TE Connectivity Ltd.
DIMENSIONS: mm	TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ± – ; 1 PLC ± 0.38 ; 2 PLC ± 0.25 ; 3 PLC ± 0.15 ; 4 PLC ± – ; ANGLES ± 2°	CHK W.KODAMA 03JUN2008	NAME BATTERY HOLDER, H=18.5mm, V/T – –
		APVD S. CHIEN 03JUN2008	
		PRODUCT SPEC 108–57542	
		APPLICATION SPEC —	SIZE A3 / CAGE CODE 00779 / DRAWING NO Ⓒ–1775485 / RESTRICTED TO —
MATERIAL SEE NOTE	FINISH SEE NOTE	WEIGHT 1.19 GRAMS	CUSTOMER DRAWING / SCALE 1:1 / SHEET 5 OF 5 / REV C