
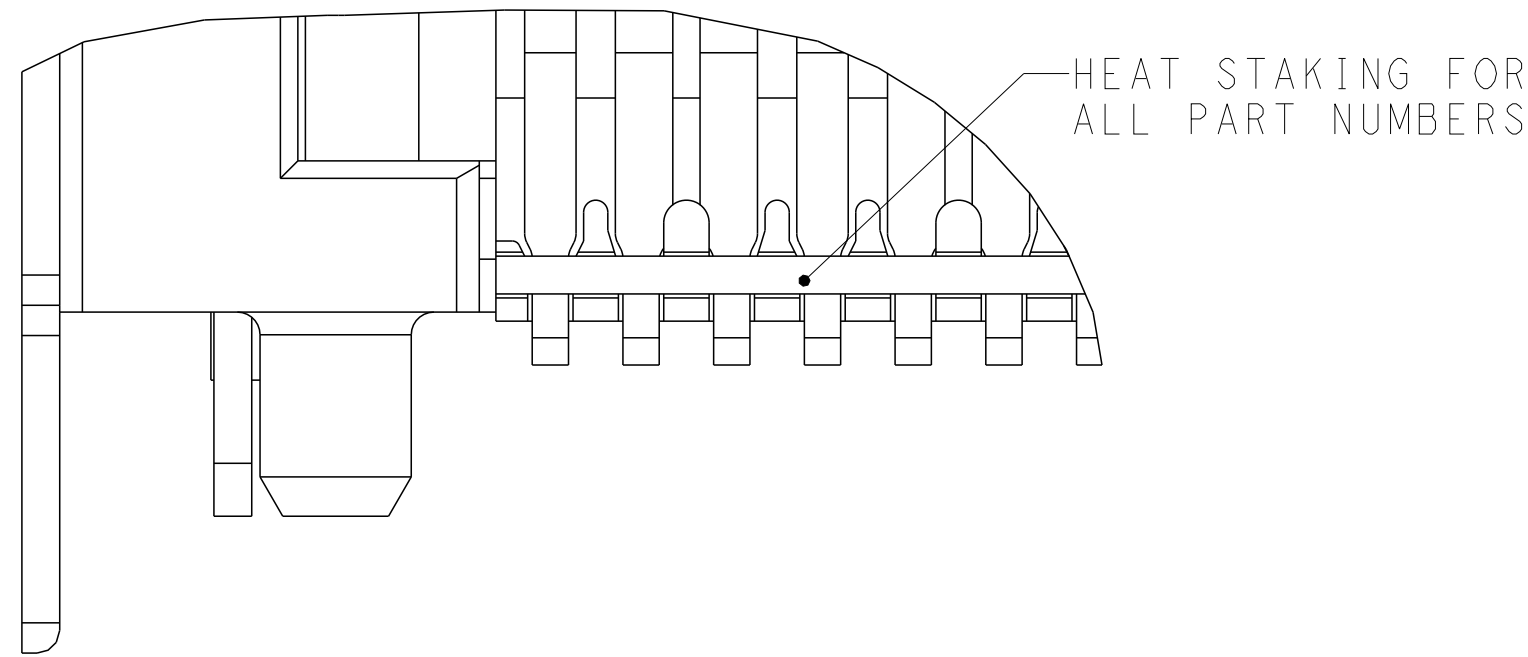
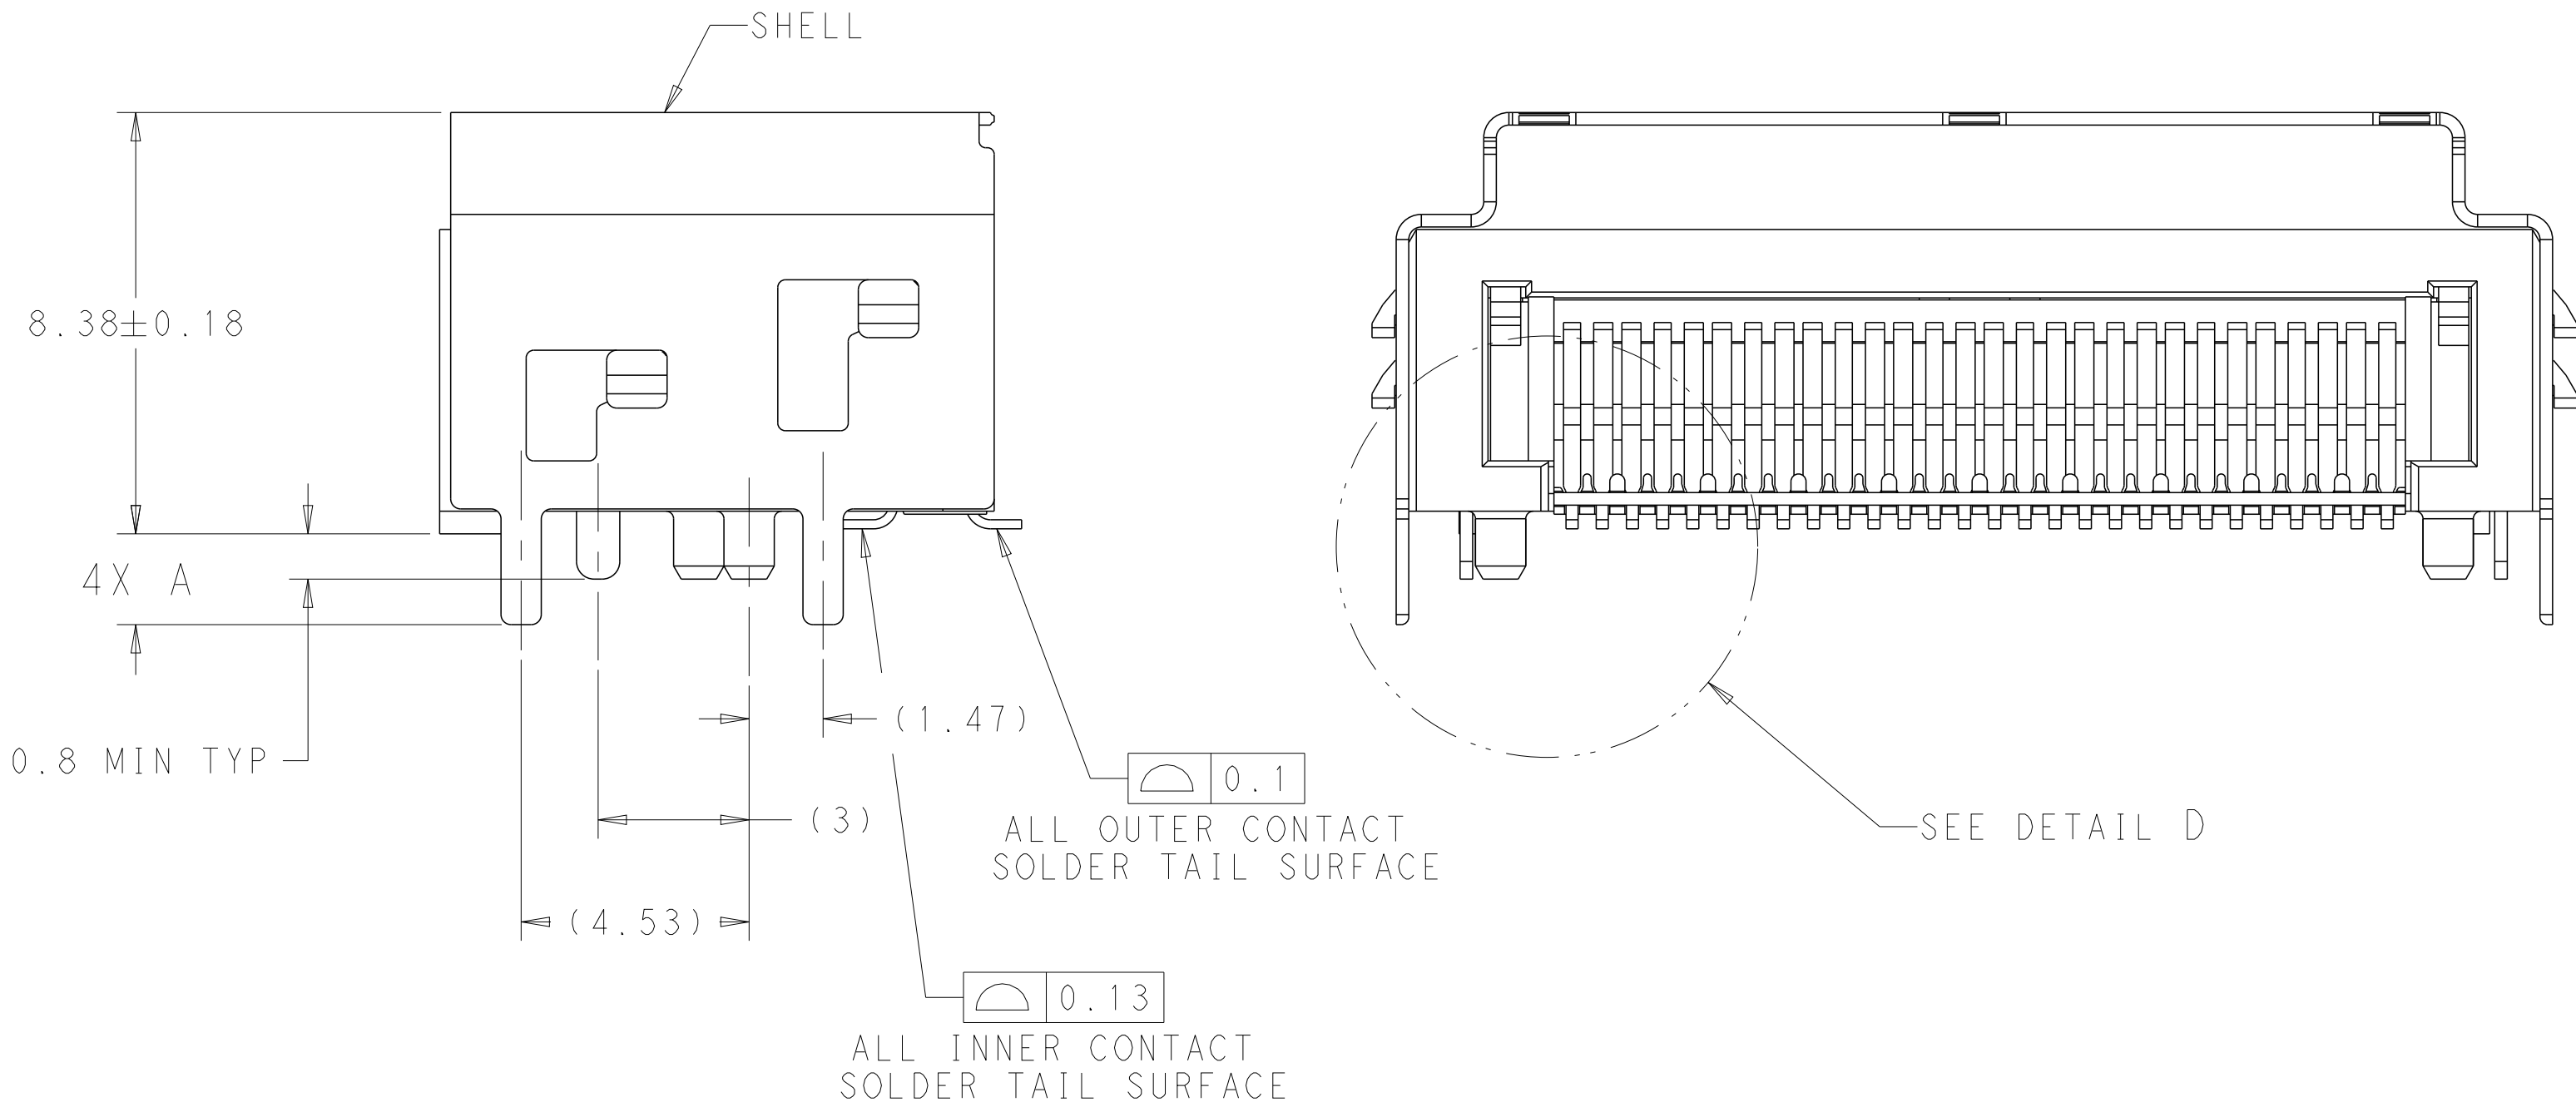
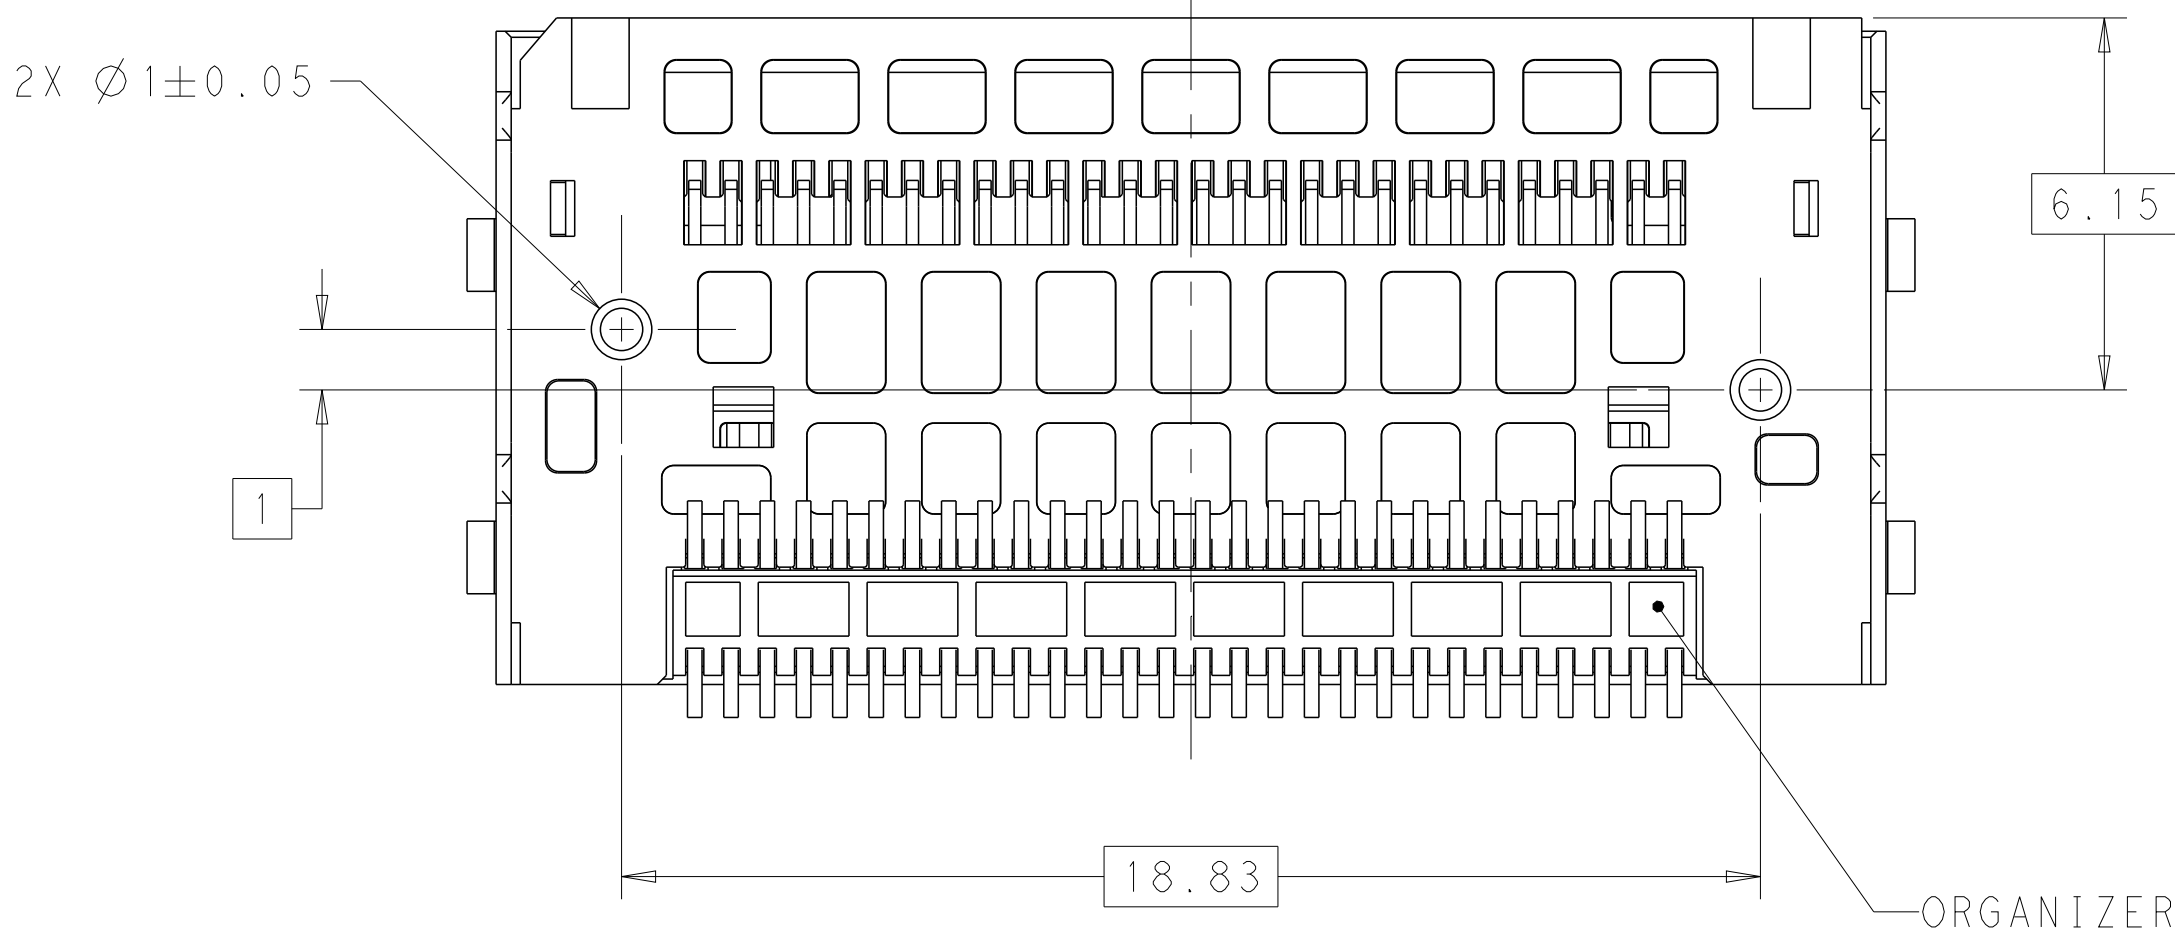
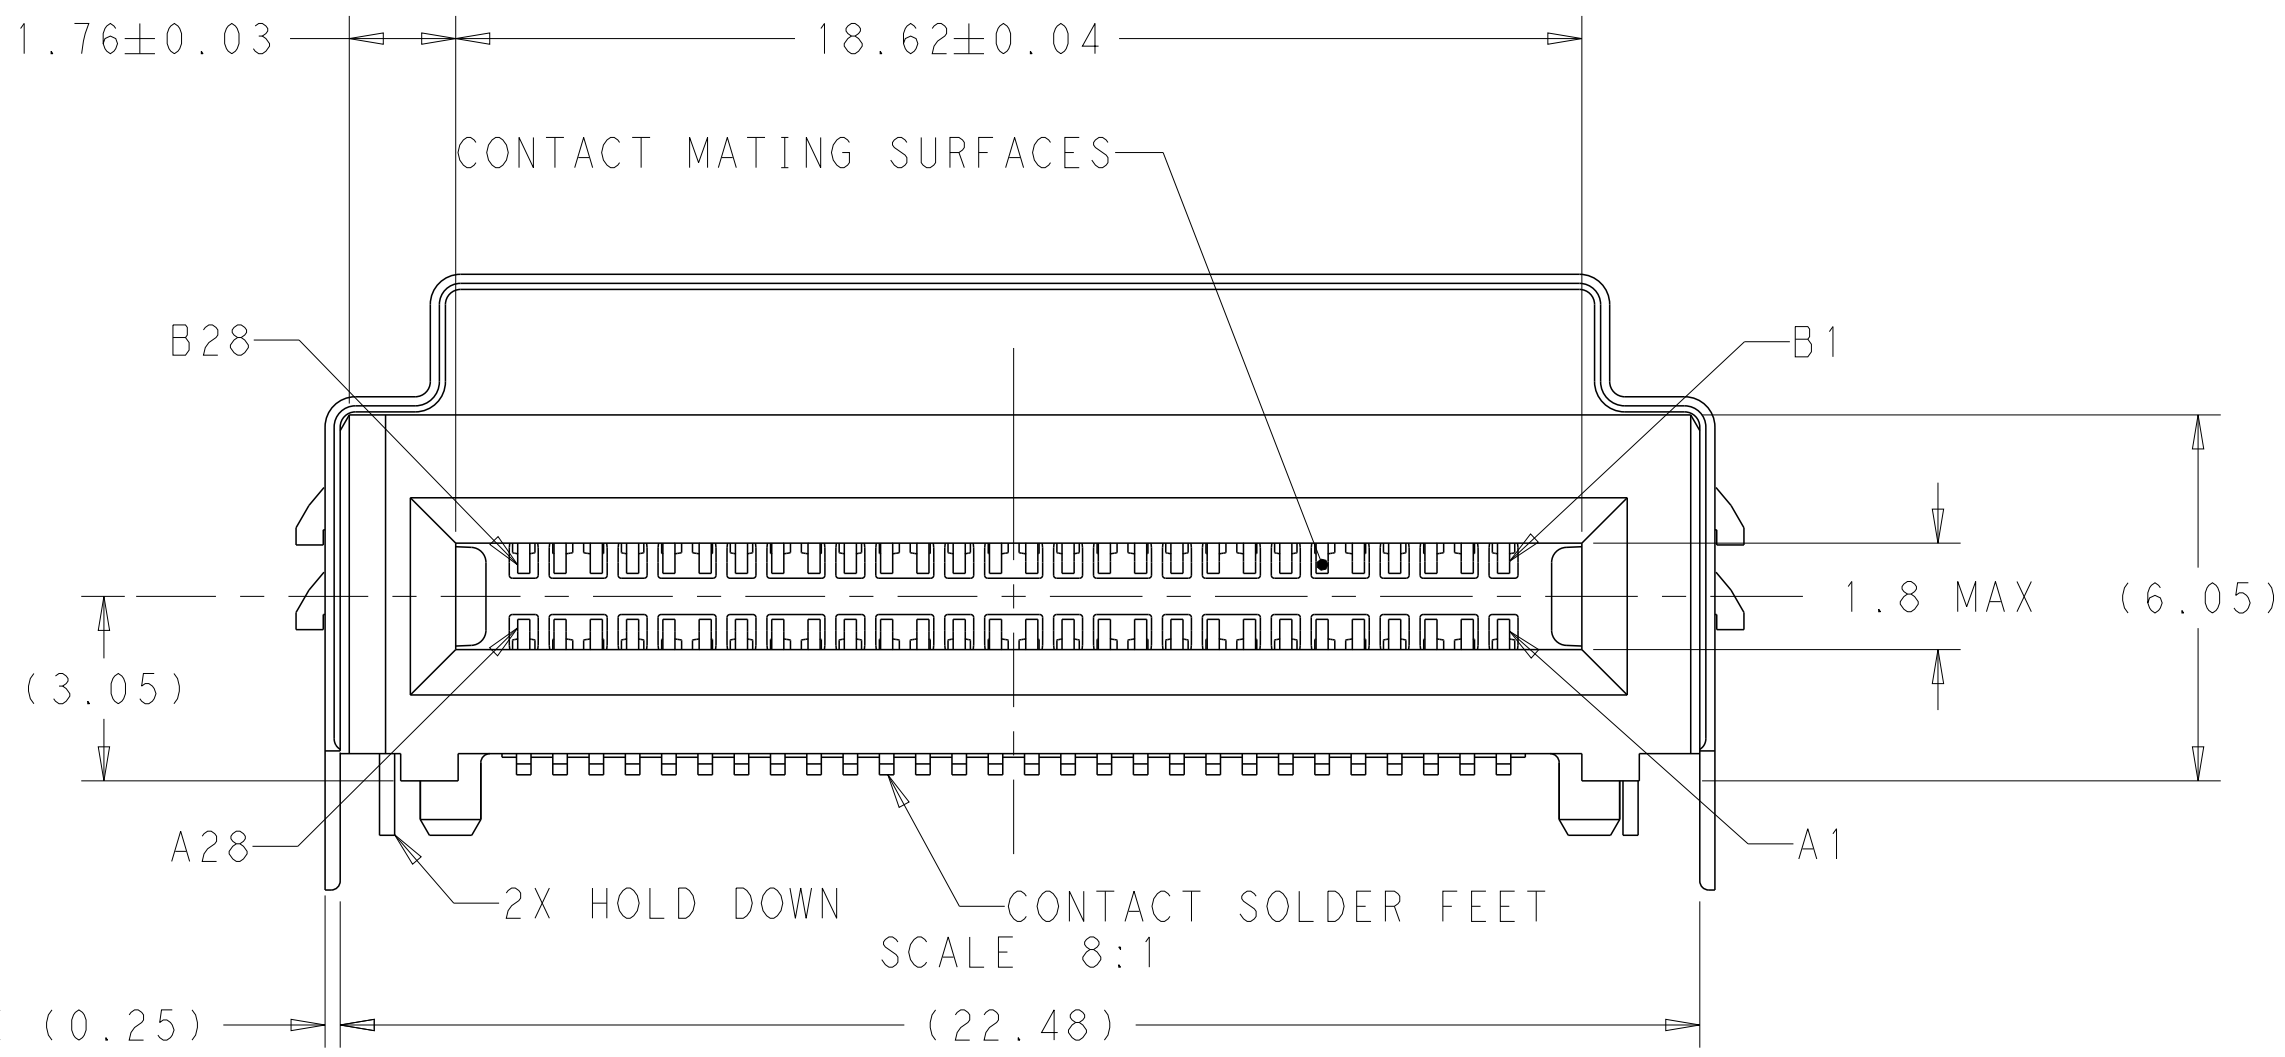


REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
B		REVISED PER ECN-21-126523	14MAR2022	TX	DZ
C		REVSIED PER ECN-22-153747	26MAY2022	TX	DZ
C1		REVSIED PER ECN-22-177902	07OCT2022	TM	DZ
C2		REVISED PER ECN-24-266777	20MAY2024	TR	JM

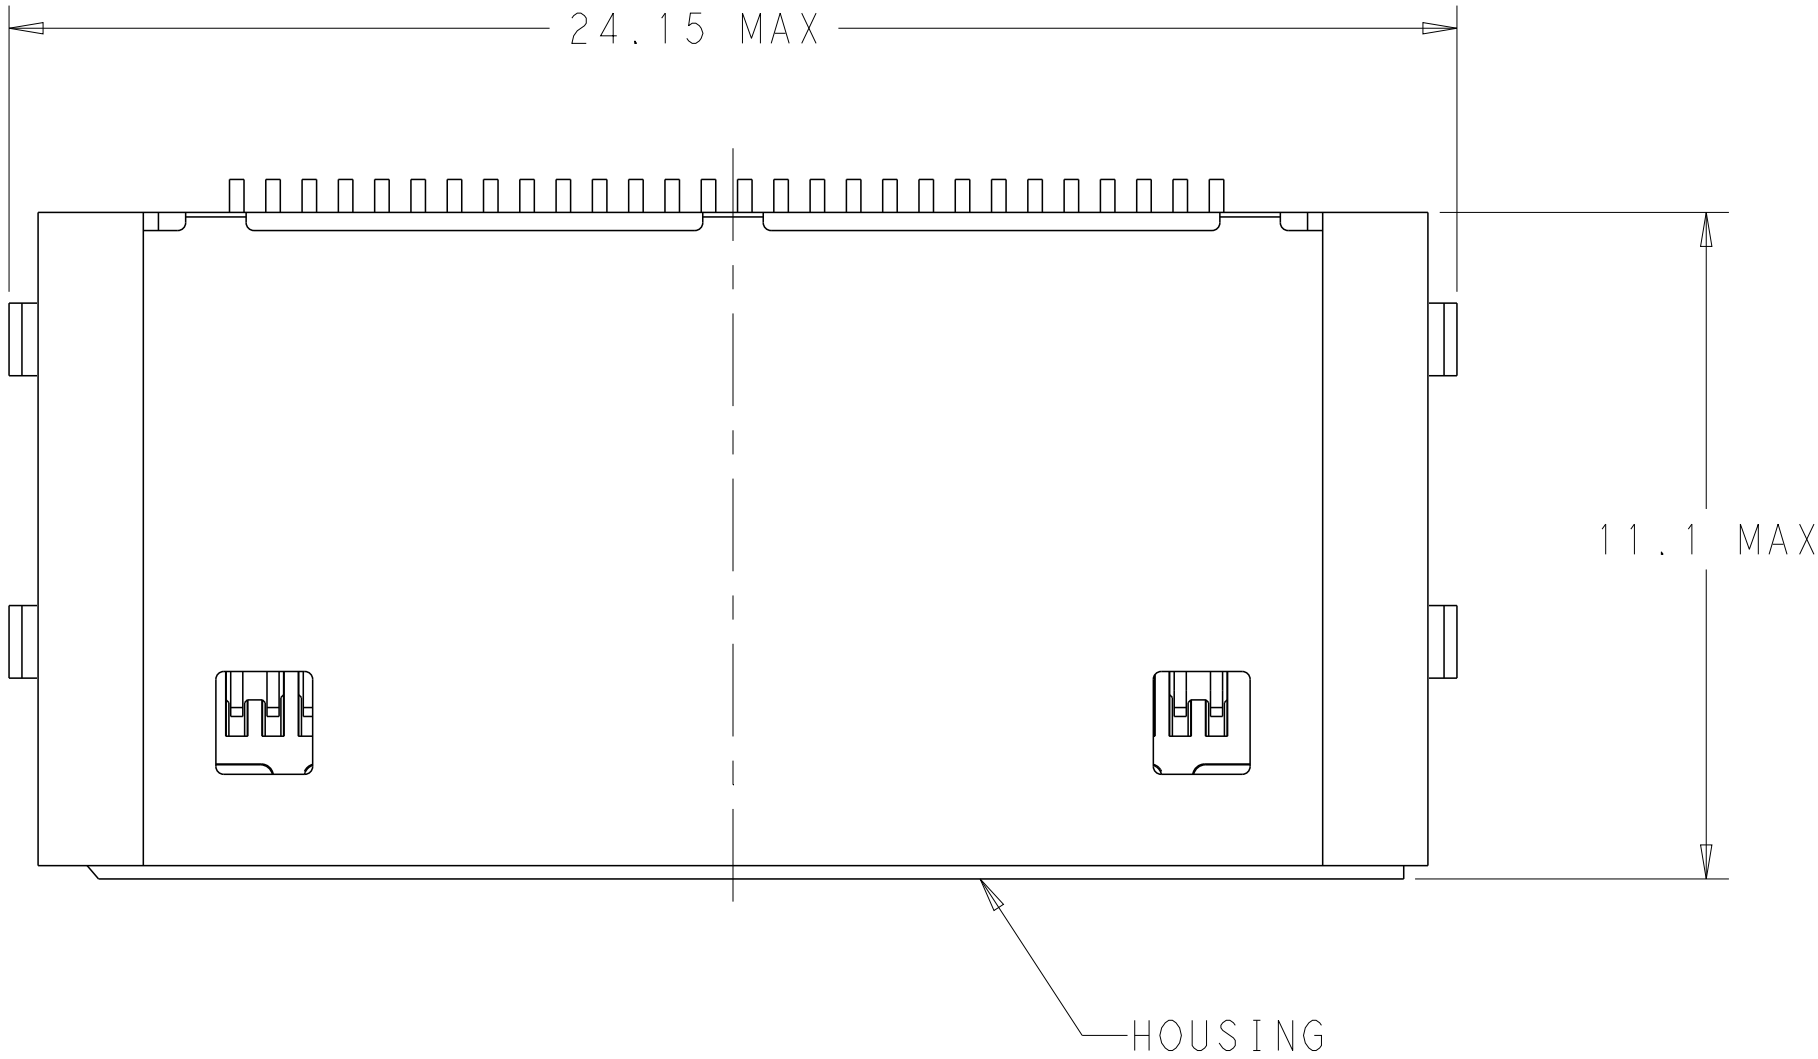


DETAIL D
SCALE 20:1

- HOUSING, ORGANIZER AND CONTACT OVERMOLDS - LCP, UL94V-0, BLACK. SHELL, CONTACTS AND HOLD DOWNS - COPPER ALLOY.
- CONTACTS - GOLD PLATE ON MATING SURFACES, TIN PLATE ON SOLDER FEET. HOLD DOWNS - TIN PLATE. SHELL - NICKEL PLATE, TIN PLATE ON HOLD DOWNS.
- DATUMS AND BASIC DIMENSIONS ESTABLISHED BY CUSTOMER.
- MINIMUM HOST PCB THICKNESS: 1.5.
- SEE MSA SPECIFICATION FOR ADDITIONAL PADDLE CARD LAYOUTS COMPATABLE WITH THIS RECEPTACLE AND FOR OPTIONAL SPLIT CONTACT PAD LAYOUTS FOR THE PADDLE CARD. SPECIFICATION PINOUT MAY ALSO DESIGNATE PAD SEQUENCE DIFFERENT FROM ILLUSTRATION.
- POSITIONS DESIGNATED AS "SIGNAL" ARE REQUIRED LOCATIONS FOR HIGH SPEED DIFFERENTIAL PAIR SIGNALING. THESE LOCATIONS MAY ALSO BE USED FOR SUPPORTING SIDEBAND SIGNALS OR OTHER UTILITY PURPOSES. POSITIONS DESIGNATED AS "GROUND" ARE REQUIRED WHEN SUPPORTING HIGH SPEED DIFFERENTIAL SIGNALS. THESE LOCATIONS MAY ALSO BE USED FOR SIDEBAND SIGNALS OR OTHER UTILITY PURPOSES.
- COMPONENT AND TRACES KEEP OUT AREA. EACH EDGE 0.15 MIN FROM EDGE OF HOLE.
- TAPE AND REEL PACKAGED FOR PICK AND PLACE SURFACE MOUNT PROCESSING, SEE FIGURE 1 AND FIGURE 2. POCKET TAPE: WIDTH = 44.

SEE SHEET 4
FOR PART TABLE


THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN B. MATTHEWS 29MAR2018	TE Connectivity	
DIMENSIONS:		CHK D. HARMON 29MAR2018		
mm		APVD D. HARMON 29MAR2018	NAME RECEPTACLE ASSEMBLY, RIGHT ANGLE, 56 POSITION, SLIVER 2.0	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		PRODUCT SPEC	SIZE	
0 PLC ±		108-130021	CAGE CODE	
1 PLC ±		APPLICATION SPEC	DRAWING NO	
2 PLC ±		114-130015	A100779C=2332208	
3 PLC ±		WEIGHT	RESTRICTED TO	
4 PLC ±		-	-	
ANGLES		CUSTOMER DRAWING	SCALE 10:1	
FINISH			SHEET 1 OF 5	
1			REV C2	

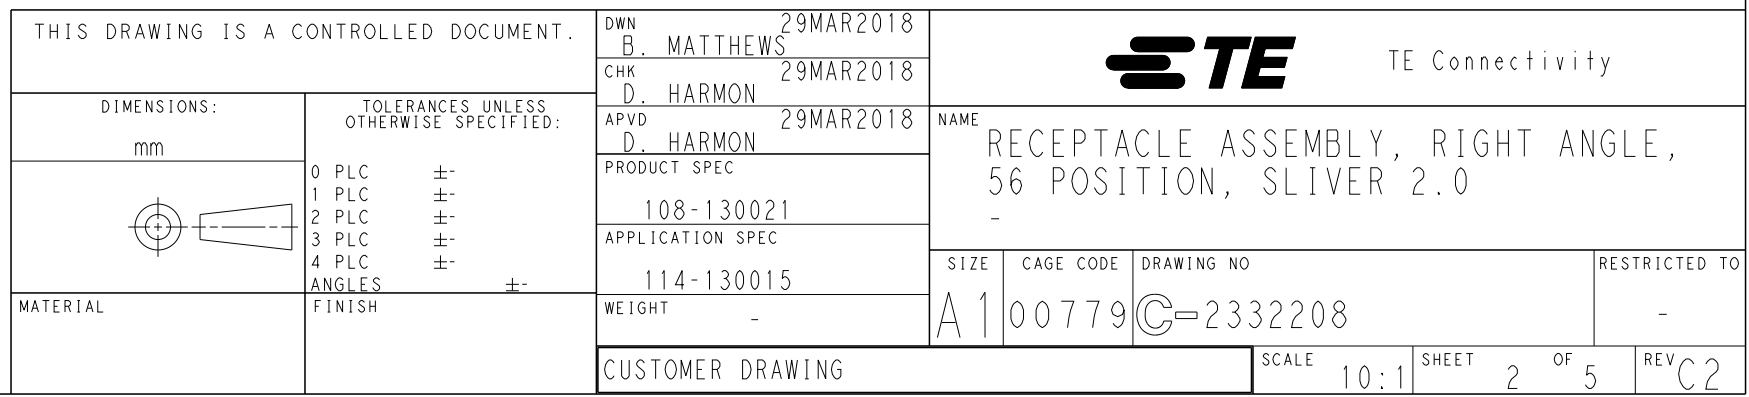

REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	-	SEE SHEET 1	-	-	-

TABLE 1: CONNECTOR CONTACT IDENTIFICATION 

CONTACT NUMBER	SIDE A	SIDE B
1	GROUND	GROUND
2	SIGNAL	SIGNAL
3	SIGNAL	SIGNAL
4	GROUND	GROUND
5	SIGNAL	SIGNAL
6	SIGNAL	SIGNAL
7	GROUND	GROUND
8	SIGNAL	SIGNAL
9	SIGNAL	SIGNAL
10	GROUND	GROUND
11	SIGNAL	SIGNAL
12	SIGNAL	SIGNAL
13	GROUND	GROUND
14	SIGNAL	SIGNAL
15	SIGNAL	SIGNAL
16	GROUND	GROUND
17	SIGNAL	SIGNAL
18	SIGNAL	SIGNAL
19	GROUND	GROUND
20	SIGNAL	SIGNAL
21	SIGNAL	SIGNAL
22	GROUND	GROUND
23	SIGNAL	SIGNAL
24	SIGNAL	SIGNAL
25	GROUND	GROUND
26	SIGNAL	SIGNAL
27	SIGNAL	SIGNAL
28	GROUND	GROUND

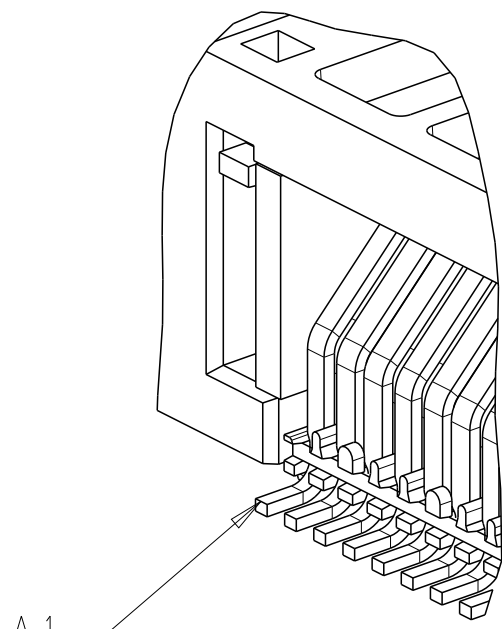

DETAIL A
SCALE 10:1

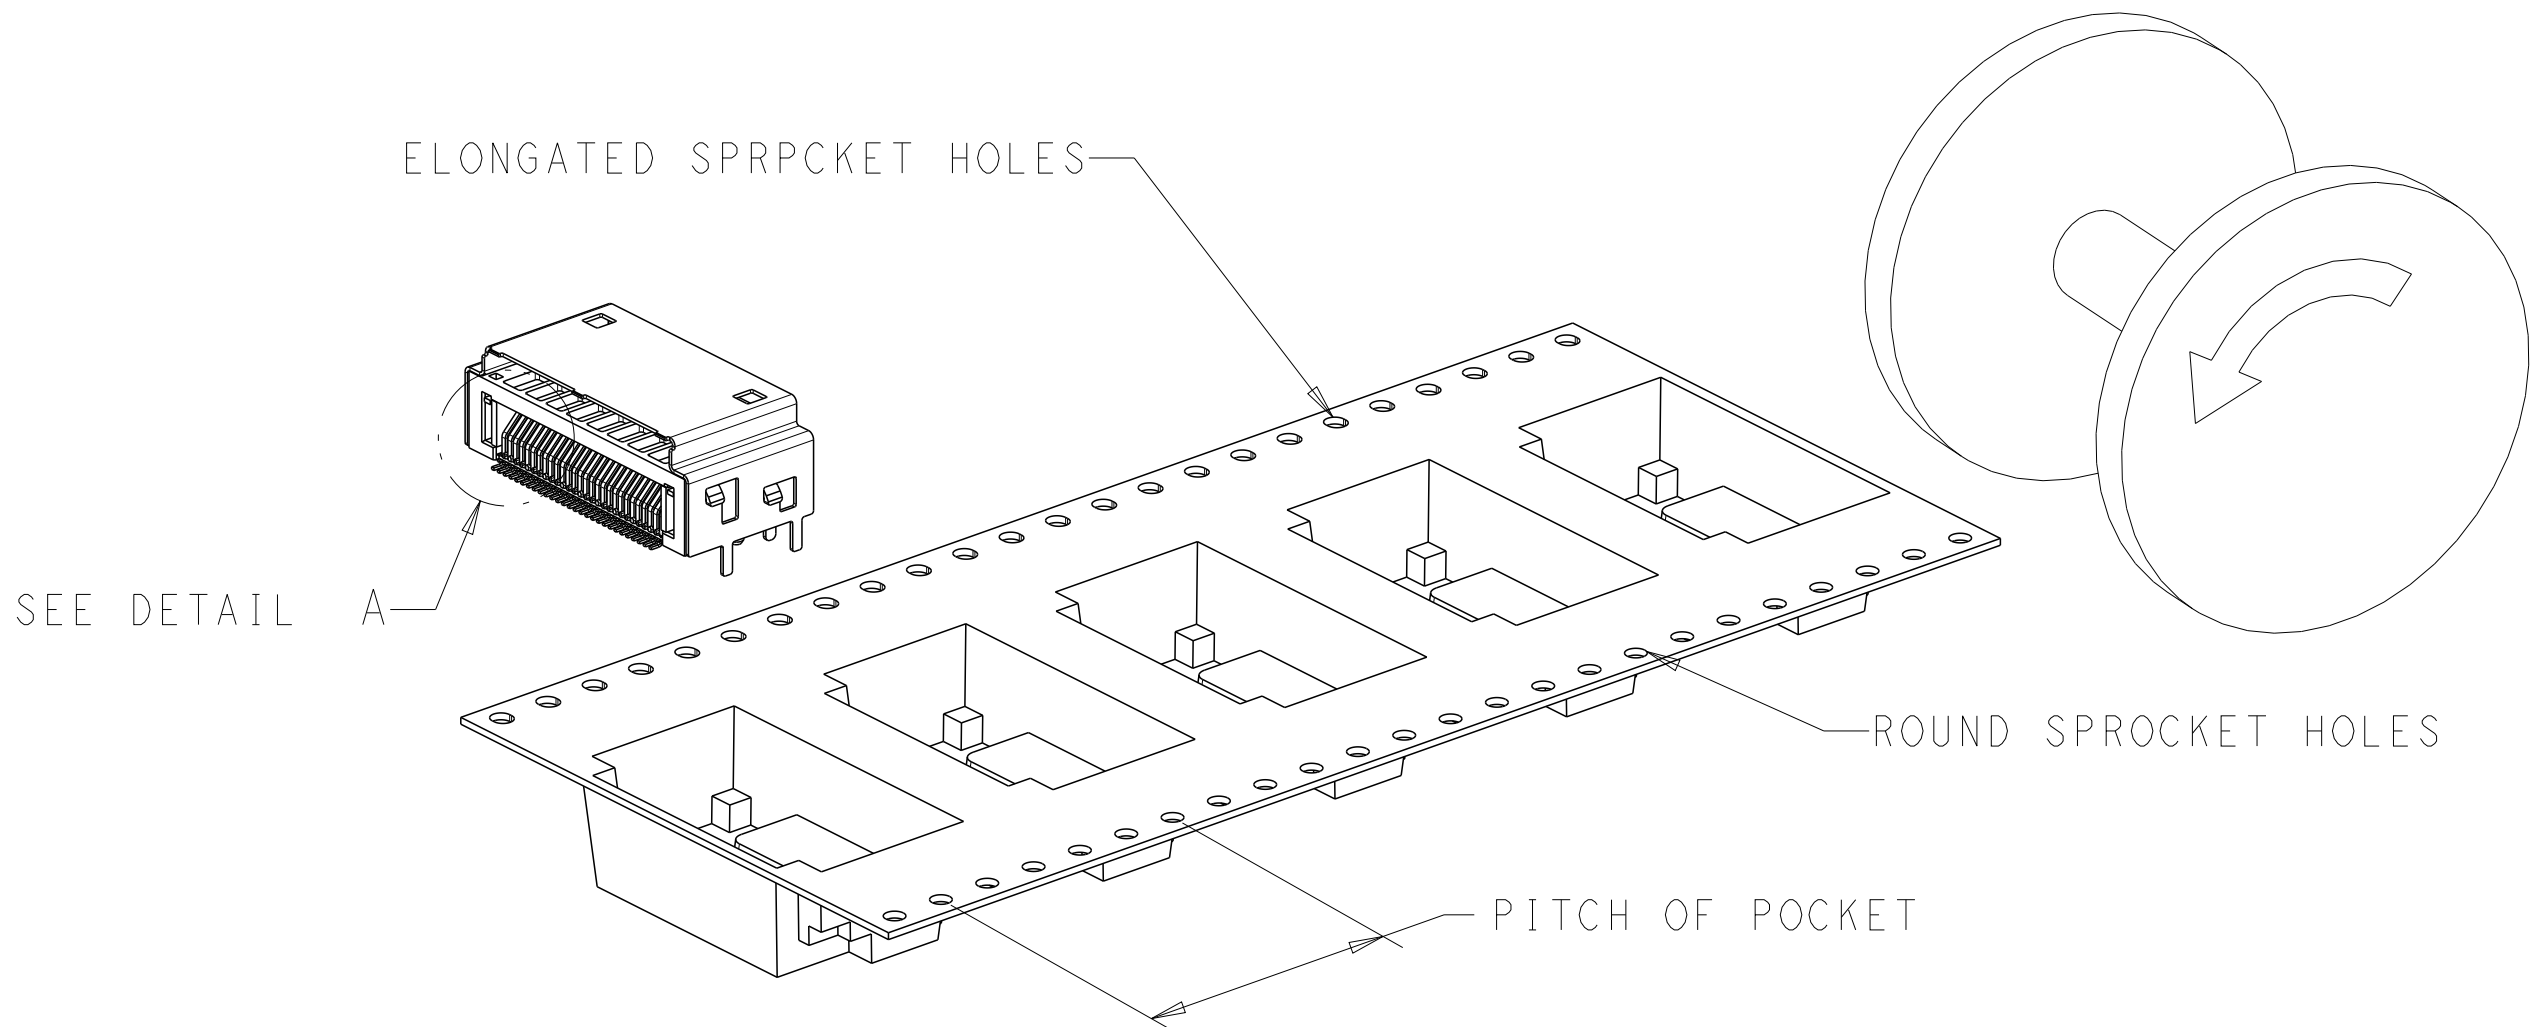


FIGURE 1 
DIRECTION OFF TOP OF REEL
FOR USER UNREELING FOR 2332208-1,
2332208-2 AND 2332208-4 TO 2332208-6
SCALE 2:1








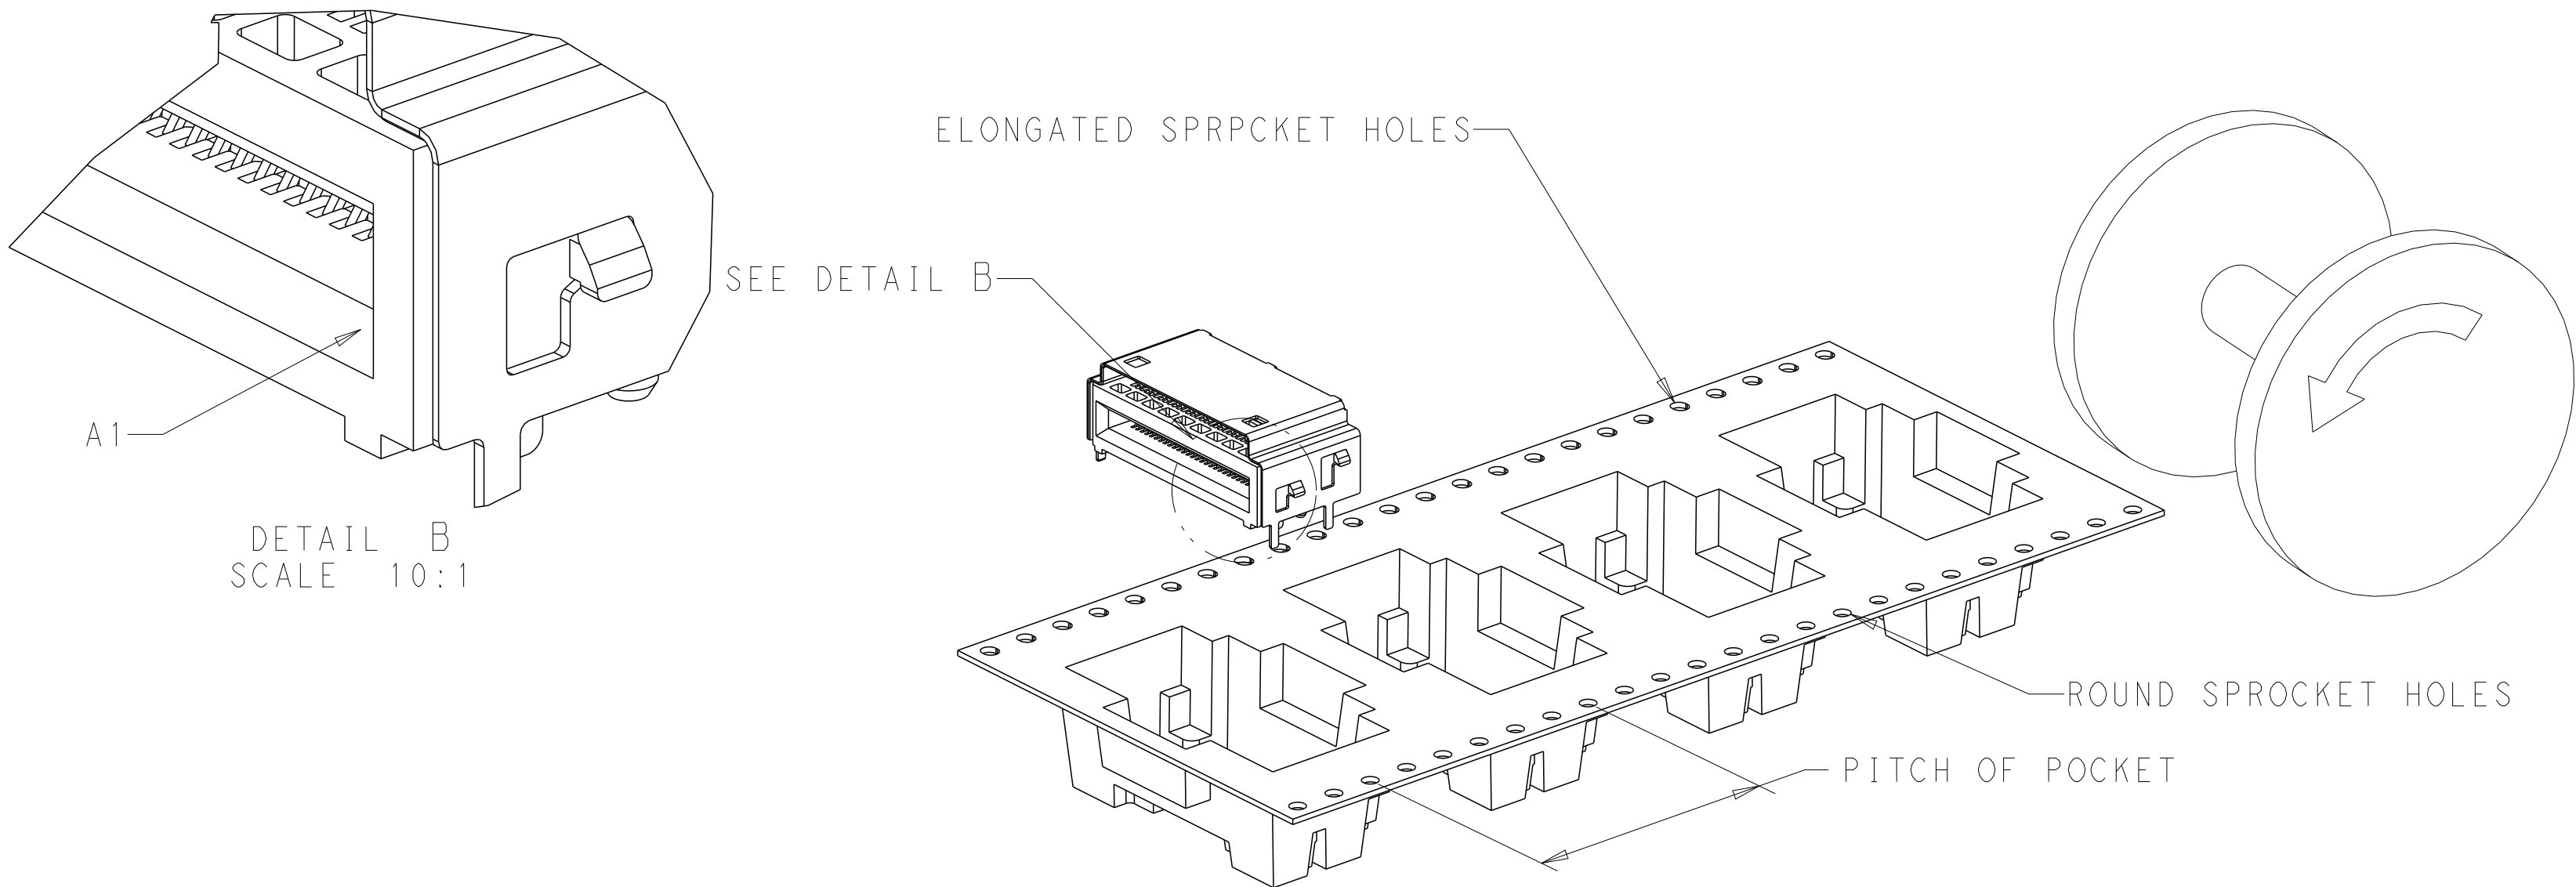


FIGURE 2 
DIRECTION OFF TOP OF REEL
FOR USER UNREELING
FOR 1-2332208-1 TO 1-2332208-6
SCALE 2:1

	1.8 +0.2/-0.1	0.76µm Au	20	350	200	1-2332208-0
OBSOLETE	3±0.1	0.76µm Au	24	300	200	1-2332208-9
OBSOLETE		0.38µm Au			100	1-2332208-8
OBSOLETE		FLASH Au/PdNi			50	1-2332208-7
	1.2±0.2	0.76µm Au	24	300	200	1-2332208-6
		0.38µm Au			100	1-2332208-5
		FLASH Au/PdNi			50	1-2332208-4
	1.8 +0.2/-0.1	0.76µm Au	24	300	200	1-2332208-3
		0.38µm Au			100	1-2332208-2
		FLASH Au/PdNi			50	1-2332208-1
OBSOLETE	3±0.1	0.76µm Au	20	350	200	2332208-9
OBSOLETE		0.38µm Au			100	2332208-8
OBSOLETE		FLASH Au/PdNi			50	2332208-7
	1.2±0.2	0.76µm Au	20	350	200	2332208-6
		0.38µm Au			100	2332208-5
		FLASH Au/PdNi			50	2332208-4
	1.8 +0.2/-0.1	0.76µm Au	20	350	200	2332208-3
		0.38µm Au			100	2332208-2
		FLASH Au/PdNi			50	2332208-1
	A	PLATING	POCKET TAPE PITCH	REEL QUANTITY	MATING CYCLES	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN B. MATTHEWS 29MAR2018	 TE Connectivity	
DIMENSIONS:		CHK D. HARMON 29MAR2018		
mm		TOLERANCES UNLESS OTHERWISE SPECIFIED:		NAME RECEPTACLE ASSEMBLY, RIGHT ANGLE, 56 POSITION, SLIVER 2.0
		0 PLC ±" <td></td>		
		1 PLC ±"		
		2 PLC ±"		
		3 PLC ±"		
		4 PLC ±"		
MATERIAL		ANGLES		
		FINISH		
		SIZE		
		CAGE CODE		
		DRAWING NO		
		RESTRICTED TO		
		WEIGHT	A100779C=2332208	
		CUSTOMER DRAWING		SCALE 10:1
				SHEET 4 OF 5
				REV C2

REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
-	-	SEE SHEET 1	-	-	-

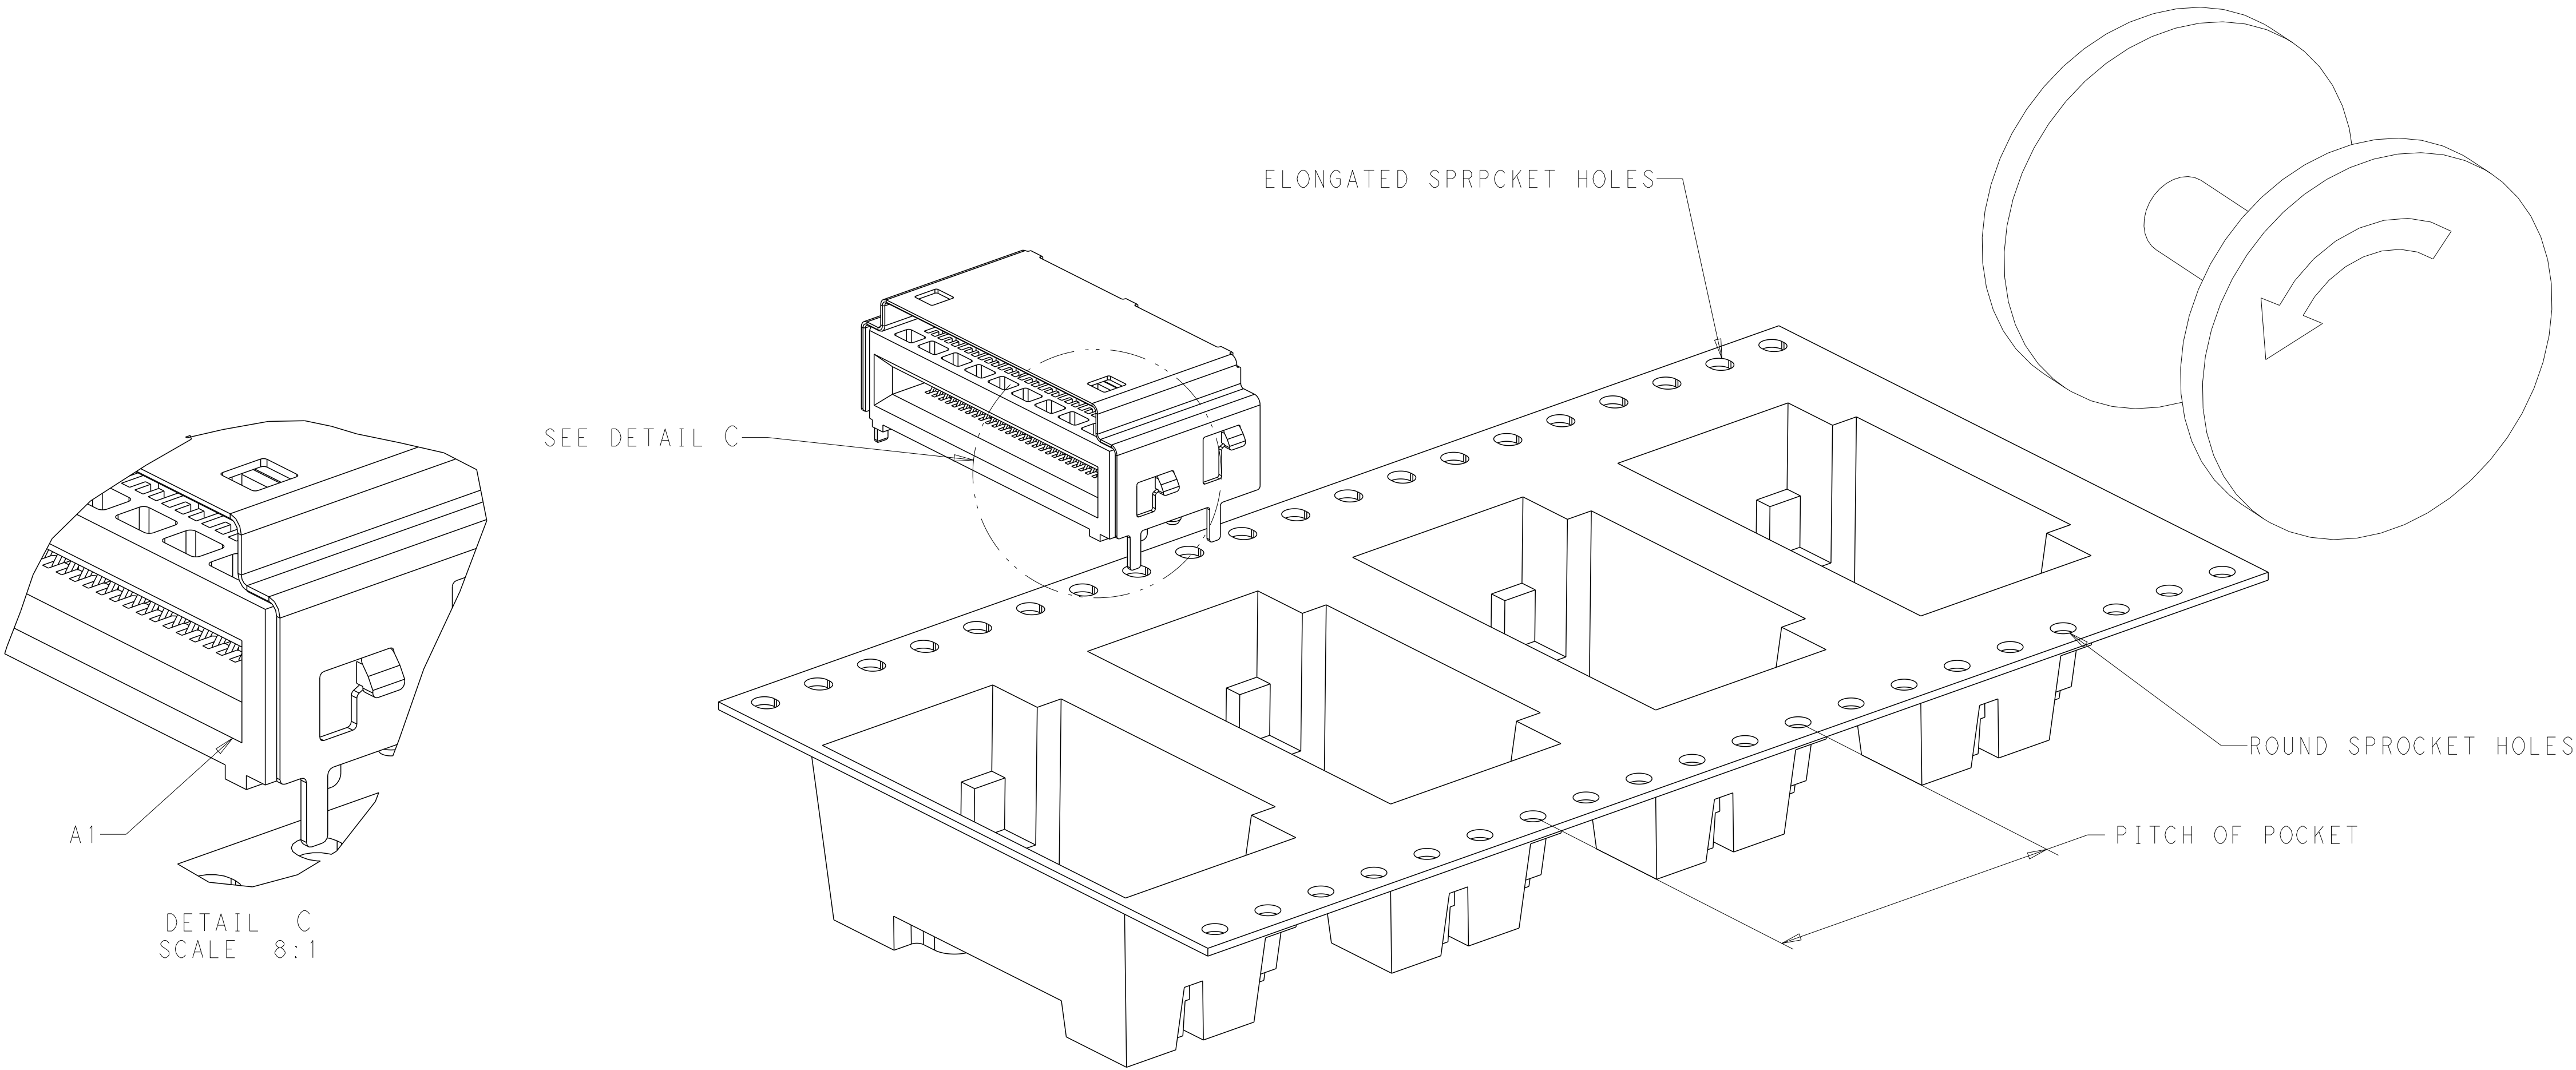

A1
DETAIL C
SCALE 8:1

FIGURE 3
DIRECTION OFF TOP OF REEL
FOR USER UNREELING
FOR 2332208-3 AND 1-2332208-0
SCALE 4:1

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN B. MATTHEWS 29MAR2018	TE Connectivity	
		CHK D. HARMON 29MAR2018		
DIMENSIONS:		APVD D. HARMON 29MAR2018	NAME RECEPTACLE ASSEMBLY, RIGHT ANGLE, 56 POSITION, SLIVER 2.0	
mm		PRODUCT SPEC		
		108-130021	SIZE A100779	
		APPLICATION SPEC		
		114-130015		
		FINISH		
MATERIAL		WEIGHT	DRAWING NO C=2332208	
		CUSTOMER DRAWING	RESTRICTED TO -	
		SCALE 10:1	SHEET 5 OF 5	
			REV C2	