


REVISIONS

	REV	DESCRIPTION /MODIFICATIONS	DATE	DWN	APVD
	1	NEW DRAWING	21FEB2020		

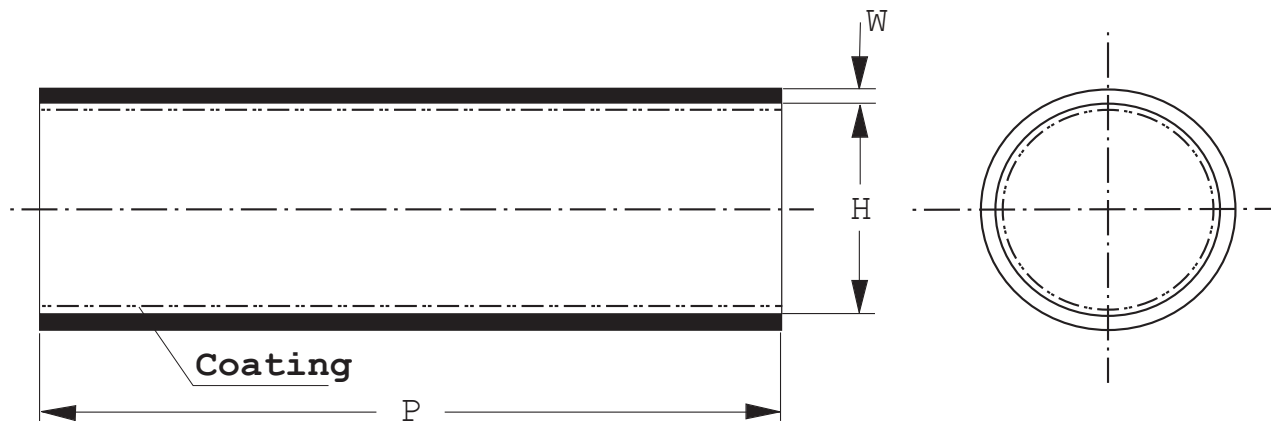


NOTES

1. DIMENSIONS IN mm. a = AS SUPPLIED, b = AFTER FREE RECOVERY
2. STANDARD LENGTHS P: 1000 mm, 1200 mm and 1500 mm. OTHER CUT LENGTHS AVAILABLE UNDER REQUEST
3. MAXIMUM LONGITUDINAL CHANGE AFTER FREE RECOVERY: +5%/-10%
4. STANDARD CUT LENGTH TOLERANCES:
 - ± 6 mm (P ≤ 200)
 - ± 9 mm (P > 200)
 - ± 13 mm (P > 300)
 - ± 15 mm (P > 450)
 - 0/+40 mm (P > 1000)
5. STANDARD PRINTING /S (COATED): LOGO, WCSM, PRODUCT SIZE, BATCH NUMBER

PRODUCT SIZE	APPLICATION RANGE		H		W
	MIN	MAX	A MIN	B MAX	B MIN
WCSM- 12/3	3.5	10	12	3	2.0
WCSM- 16/4	4.5	14	16	4	2.4
WCSM- 24/6	6.5	22	24	6	2.7
WCSM- 34/8	9	31	33	8	4.0
WCSM- 48/12	13	44	48	12	4.5
WCSM- 56/16	17.5	50	56	16	4.4
WCSM- 70/20	22	63	70	20	4.4
WCSM- 90/25	27	81	90	25	4.3
WCSM- 110/30	33	100	110	30	4.3
WCSM- 130/35	38	118	130	35	4.3
WCSM- 160/50	55	144	160	50	4.3
WCSM- 180/50	55	162	180	50	4.3
WCSM- 200/50	55	180	200	50	4.3
WCSM- 250/65	70	225	250	65	4.3
WCSM- 320/95	105	295	320	95	4.3
WCSM- 385/110	125	350	385	110	4.3



THIS DRAWING IS A CONTROLLED DOCUMENT.		DWM		TE Connectivity											
		CHK													
DIMENSIONS: mm		TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD		NAME									
				PRODUCT SPEC		WCSM HEAT SHRINK THICK-WALL TUBING									
				-											
				APPLICATION SPEC		SIZE FORMAT		CAGE CODE		DRAWING NO		RESTRICTED TO			
				-		A3		-		EPD-202-311922-01		-			
MATERIAL		FINISH		WEIGHT		-									
-		-													
CUSTOMER DRAWING								SCALE		NTS		SHEET 1		REV 1	