

ADAPTER, BETWEEN SERIES 2.4mm / SMA

DC - 26.5 GHz

api 
technologies corp.
> INMET

MODELS: 5080, 5081, 5082, 5083

SPECIFICATIONS:

Electrical:

Frequency Range _____ DC — 26.5 GHz
VSWR _____ 1.20:1 Max.
Impedance _____ 50 Ohms
Operating Temp. Range _____ -65°C to +125°C



Mechanical:

2.4mm Connectors _____ Passivated Stainless Steel
(Mates with 1.85mm & V* Connectors)
SMA Connectors _____ Passivated Stainless Steel
(Mates with MIL-STD-348)
Conductors _____ Gold Plated Beryllium Copper

*V is a trademark of Anritsu Corp.



Model Number: **5080**
2.4mm MALE / SMA MALE

Model Number: **5082**
2.4mm MALE / SMA FEMALE

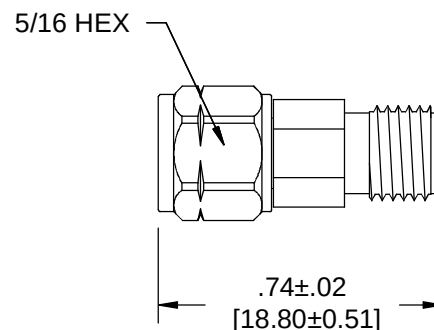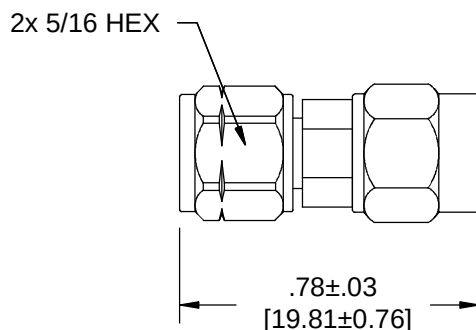

Model Number: **5081**
2.4mm FEMALE / SMA MALE

Model Number: **5083**
2.4mm FEMALE / SMA FEMALE

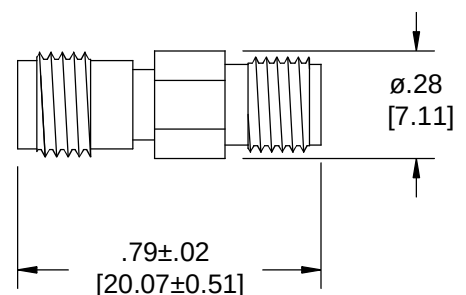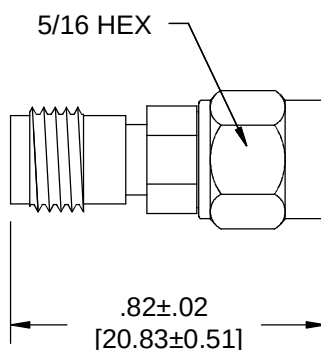

Note: Dimensions in Brackets are Expressed in Millimeters and are for Reference Only.
Design specifications are subject to change without notice.
Contact factory for technical specifications before purchasing or use.

5080; REV —

300 Dino Drive • Ann Arbor, MI 48103-9457 U.S.A. • 888-244-6638 or 734-426-5553 • FAX 734-426-5557 • inmet.apitech.com