
THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
© COPYRIGHT ALL RIGHTS RESERVED.


LOC	DIST
J	-

REVISIONS


P	LTR	DESCRIPTION	DATE	DWN	APVD
	P	REVISED PER ECO-11-005294	11APR11	RK	HMR

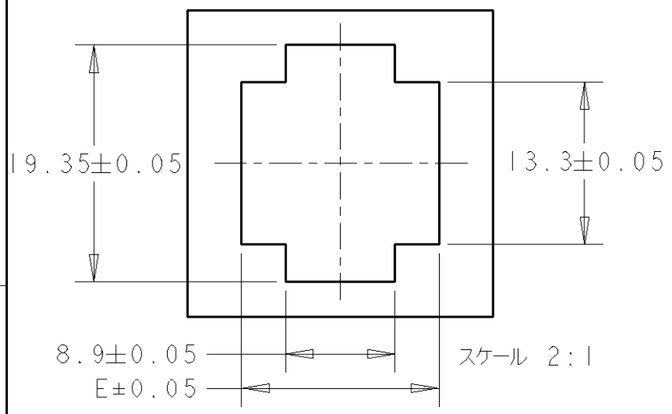


パネル加工推奨寸法図
RECOMMENDED PANEL LAYOUT
（適用パネル厚：1.0-2.0）
（APRICABLE PANEL THICKNESS:1.0-2.0）

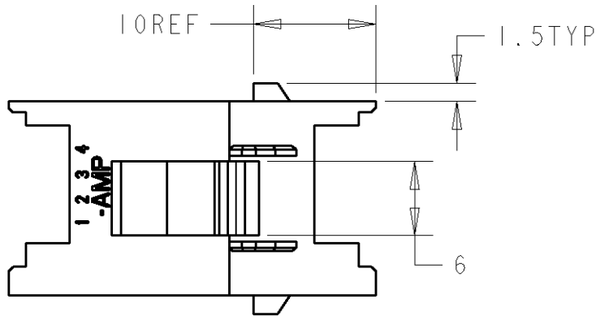


注記
1：材料：ハウジング：ガラス入り熱可塑性ポリエステル樹脂、94V-0、黒
コンタクト：銅合金
2：メッキ：コンタクト：全面Ni下地
接点部：0.2μm MIN 金メッキ
3：金属パネルの場合、コネクタ取付方向をパンチ加工方向にしてください。
4：プラスチックパネルの場合、穴端部にR無き様ご配慮ください。
NOTE
1:MATERIAL,HOUSING:GLASS FILED THERMPLASTIC,94V-0,BLACK
CONTACT,CUPPER ALLOY
2:FINISH,UNDERPLATE:Ni 1.27μm min.
CONTACT AREA:Au 0.2μm min.
3:INSERT CONN. FROM PRESS DIRECTION SIDE FOR METAL PANEL.
4:EDGE OF THICKNESS WAY MUST NOT ROUND FOR MOLDED PANEL.

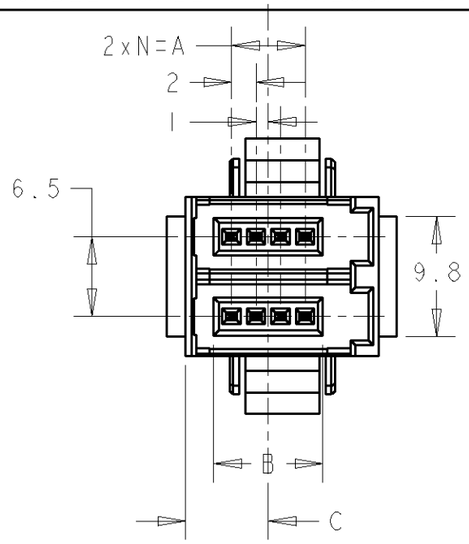

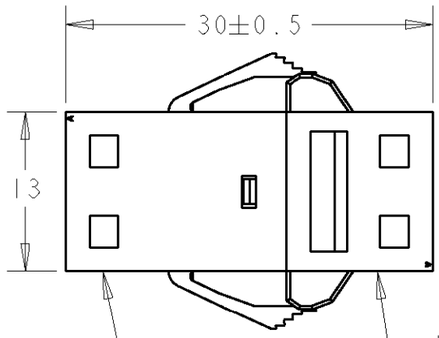



JUNCTION HOUSING B

JUNCTION HOUSING A

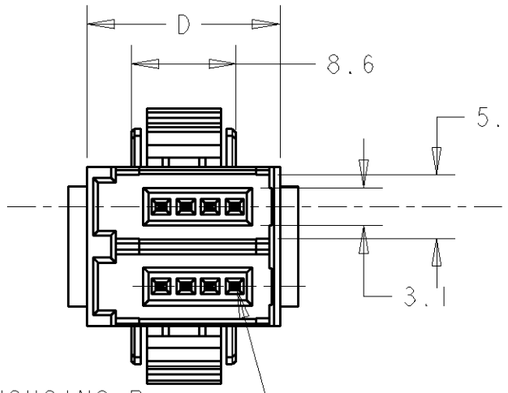


JUNCTION CONTACT

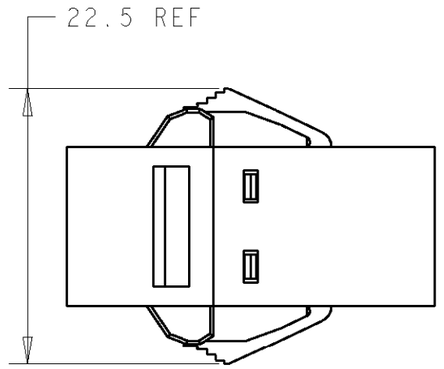

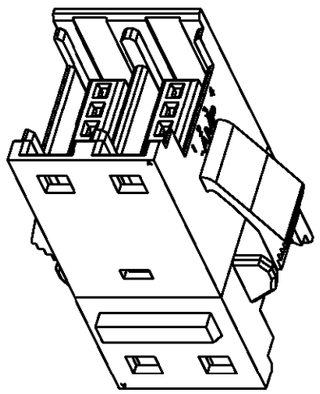

-1, -2 P/M TYPE
スケール 2:1

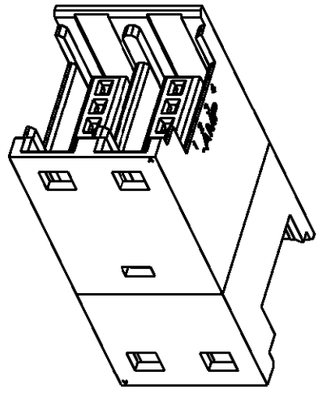

5- -1,5- -2 F/H TYPE
スケール 2:1

F/H	16.1	15.8	6.75	8.9	6	3	4	5-1473574-4
F/H	14.1	13.8	5.75	6.9	4	2	3	5-1473574-3
P/M	16.1	15.8	6.75	8.9	6	3	4	1473574-4
P/M	14.1	13.8	5.75	6.9	4	2	3	1473574-3
TYPE	E	D	C	B	A	N	POS	PART NUMBER

DIMENSIONS: mm
TOLERANCES UNLESS OTHERWISE SPECIFIED:
0 PLC ±-
1 PLC ±- ±0.2
2 PLC ±- ±3°
3 PLC ±-
4 PLC ±-
ANGLES ±-
MATERIAL -
FINISH -

DWN D.MITSUGI 10SEP2001
CHK S.MANABE 10SEP2001
APVD S.MANABE 10SEP2001
PRODUCT SPEC 108-5765
APPLICATION SPEC -
WEIGHT -

TE Connectivity

NAME
JUNCTION BOX (4D)
FOR E-CON
- RITS CONN. -

SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A3	00779	C-1473574	-

CUSTOMER DRAWING | SCALE 2:1 | SHEET 1 OF 1 | REV P