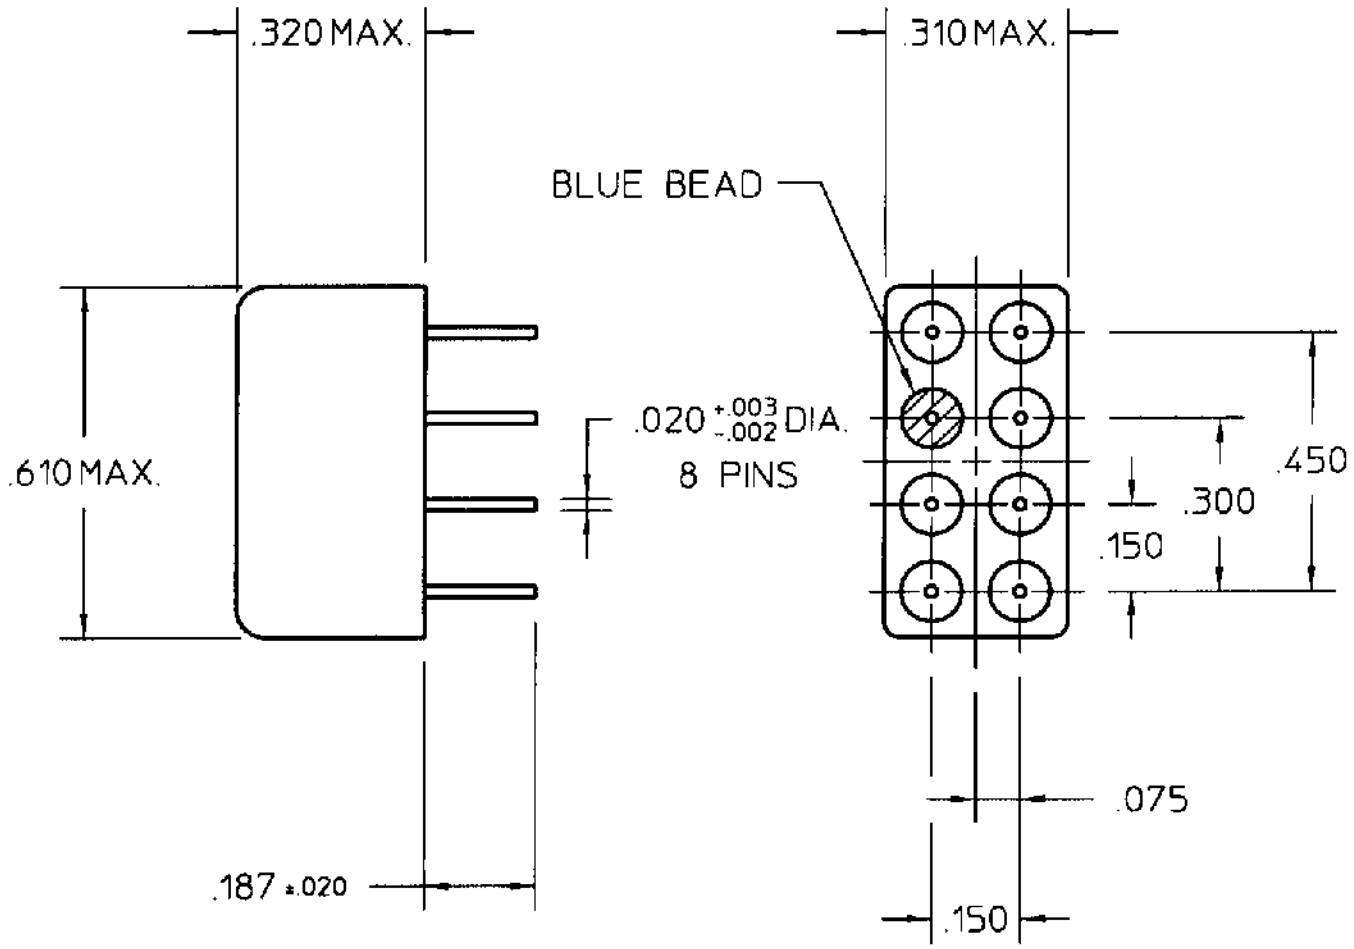


COIL: @ 25°C

RESISTANCE	1350 OHMS ± 10%
NOMINAL VOLTAGE	26.5 VDC
MUST OPERATE	13.5 VDC
MUST RELEASE	8.1 VDC MAX, 1.5 VDC MIN.

ENVIRONMENT:


VIBRATION 10 CPS TO 3000 CPS @ 30 g's

SHOCK 75 g's 6 MS. DURATION

TEMPERATURE -65 °C TO +125 °C

NOTES: OPERATE & RELEASE 4 MS MAX.
CONTACT STABILIZATION TIME 2.5 MS MAX.

CUSTOMER DATA SHEET

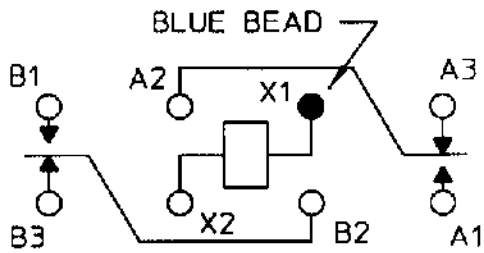

CONTACT RATING: LOW LEVEL TO
2 AMPS 28 VDC RESISTIVE
50,000 OPERATIONS

DR. R.B. 3/13/98 CK [illegible] 3/13/98

COMMUNICATIONS INSTRUMENTS, INC.

CUST. QPL
CUST. NO. M39016/13-057P

TYPE "3SBC" RELAY

3SBC2002A2