

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

, . . .

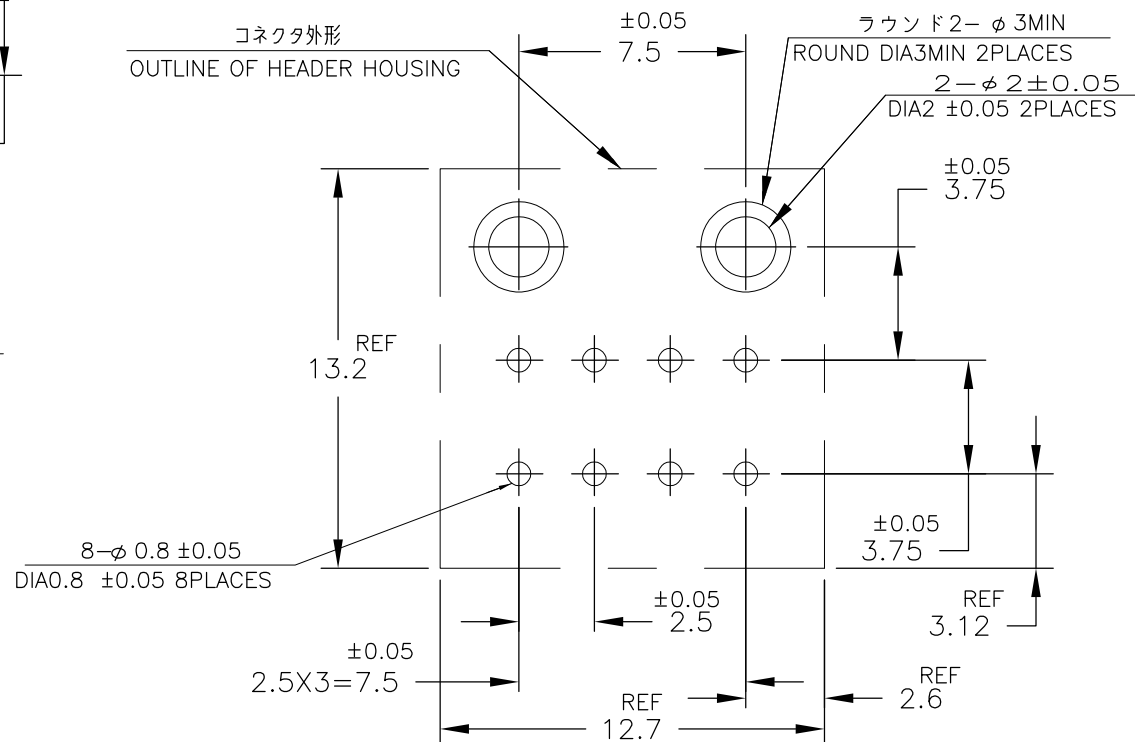
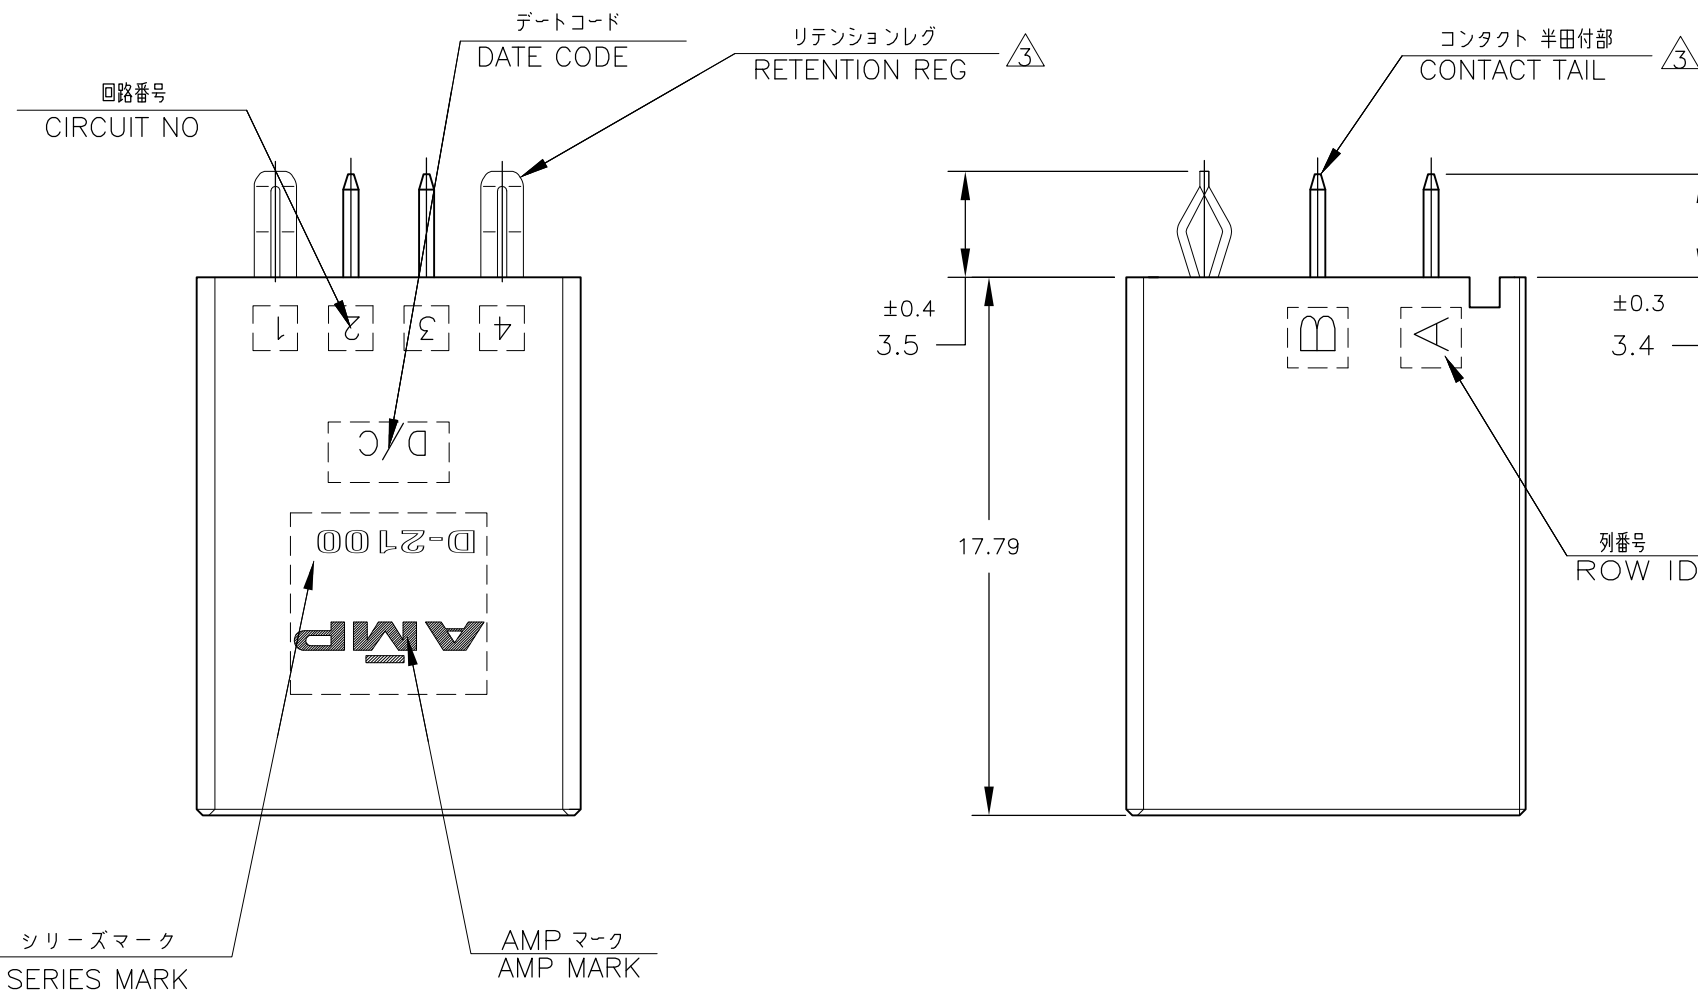
© COPYRIGHT 2012 By Tyco Electronics Japan G.K.

ALL RIGHTS RESERVED.

LOC
JDIST
—

REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
	D	REVISED	11MAY2012	H.M	N.Y



推奨基板取付け穴寸法 (公差: ±0.05)

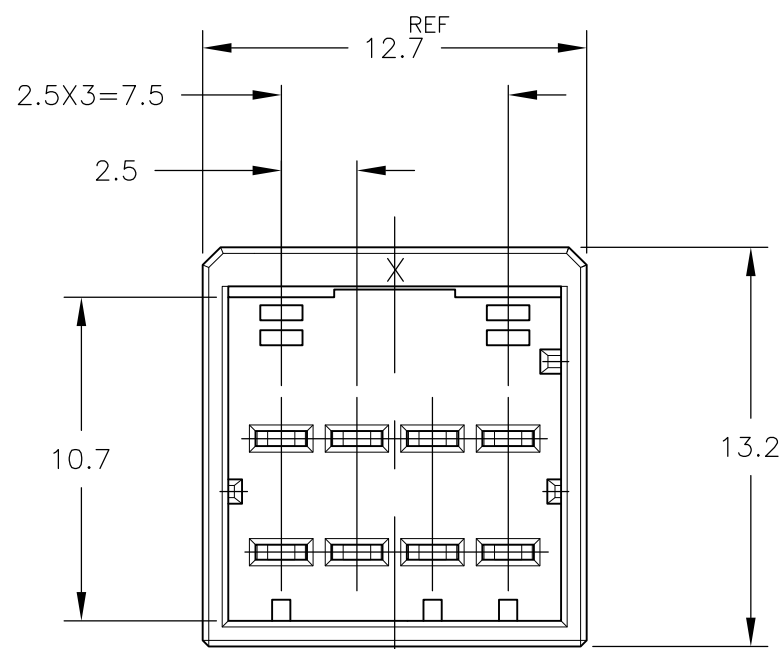

PC 基板厚: 1.6 ±0.3

(コネクタ搭載面)

RECOMMENDED PC BOARD HOLE PATTERN (TOLERANCE :±0.05)

PC BOARD THICKNESS:1.6±0.3

(CONNECTOR MOUNT SIDE)

1318125-1
(KEYING X)1318125-2
(KEYING Y)
SCALE:2-1

NOTES

1. MATERIAL:HOUSING:GLASS FILED THERMO PLASTIC
POLYESTER(94V-0)
TAB CONTACT:COPPER ALLOY
RETENTION LEG:BRASS
- △ FINISH(CONTACT AREA):0.38μmMIN GOLD PLATING
OVER Ni PLATING
- △ FINISH(RETENTION LEG): TIN PLATED
(CONTACT TAIL) OVER NICKEL

注記

1. 材料:ハウジング:ガラス入り熱可塑性
ポリエステル樹脂 (94V-0)
タブ コンタクト:銅合金
リテンション レグ:黄銅
- △ めっき:コンタクト:全面Ni下地
接触部:0.38μmMIN金めっき
- △ めっき:リテンションレグとコンタクト半田付部
:ニッケル下地の上にスズめっき

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: mm	TOLERANCES UNLESS OTHERWISE SPECIFIED:
	0 PLC 1 PLC 2 PLC 3 PLC 4 PLC ANGLES FINISH
SEE NOTE	SEE NOTE

DWN	I.IKEDA	07DEC1998
CHK	N.MATSUBARA	07DEC1998
APVD	I.HASEGAWA	07DEC1998
PRODUCT SPEC	108-5619	
APPLICATION SPEC	114-5258	
WEIGHT		

CUSTOMER DRAWING

STE

TE Connectivity

DOUBLE ROW HEADER ASSY 8P V-TYPE
DYNAMIC D-2100D

SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A3	00779	C-1318125	—

SCALE 4:1

SHEET 1 OF 2

REV D

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

, . . .

© COPYRIGHT 2012 By Tyco Electronics Japan G.K.

ALL RIGHTS RESERVED.

LOC
JDIST
—

REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
	—	SEE SHEET 1	—	—	—

③ リテンションレグ
RETENTION REG回路番号
CIRCUIT NOデートコード
DATE CODEシーケンシャルマーク
SEQUENTIAL MARKコンタクト 半田付部
CONTACT TAIL ③列番号
ROW ID1-1318125-1,2;AS SHOWN
SEQUENTIAL TYPE

Ground post ① ② Signal post

Ground post ① ② Signal post

SECT A-A

シリーズマーク
SERIES MARKAMP マーク
AMP MARK

		回路番号			
列 番 号	B	② Signal	① Ground	② Signal	② Signal
	A	② Signal	① Ground	② Signal	② Signal

POINT OF SEQUENTIAL
1-1318125-1,2

NOTES


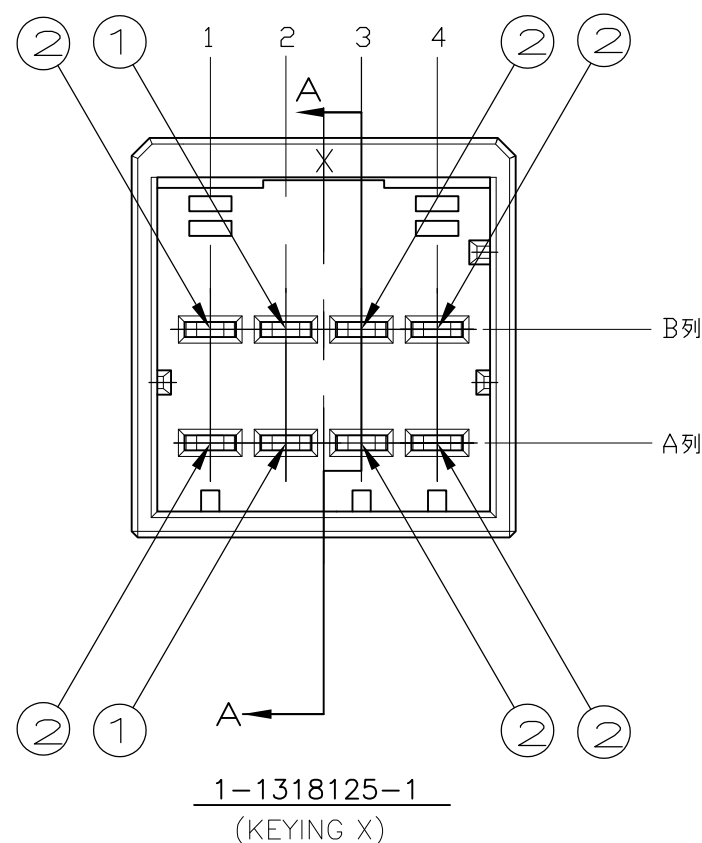
1. MATERIAL:HOUSING:GLASS FILED THERMO PLASTIC
POLYESTER(94V-0)
TAB CONTACT:COPPER ALLOY
RETENTION LEG:BRASS

② FINISH(CONTACT AREA):0.38μmMIN GOLD PLATING
OVER Ni PLATING③ FINISH(RETENTION LEG): TIN PLATED
(CONTACT TAIL) OVER NICKEL

注 記

1. 材料:ハウジング:ガラス入り熱可塑性
ポリエステル樹脂 (94V-0)
タブ コンタクト:銅合金
リテンション レグ:黄銅
② めっき:コンタクト:全面Ni下地
接触部:0.38μmMIN金めっき
③ めっき:リテンションレグとコンタクト半田付部
:ニッケル下地の上にスズめっき

Y	BLACK	1-1318125-2
X	BLACK	1-1318125-1
KEY	COLOR	PART No.

1-1318125-2
(KEYING Y)
SCALE:2-1

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN I.IKEDA 07DEC1998	 TE Connectivity		
DIMENSIONS: mm		CHK N.MATSUBARA 07DEC1998			
		APVD I.HASEGAWA 07DEC1998	NAME DOUBLE ROW HEADER ASSY 8P V-TYPE DYNAMIC D-2100D		
		PRODUCT SPEC 108-5619	SIZE A3		
MATERIAL SEE NOTE		APPLICATION SPEC 114-5258	CAGE CODE 00779		DRAWING NO C-1318125
FINISH SEE NOTE		WEIGHT	RESTRICTED TO —		SCALE 4:1
CUSTOMER DRAWING		SHEET 2 OF 2		REV D	