



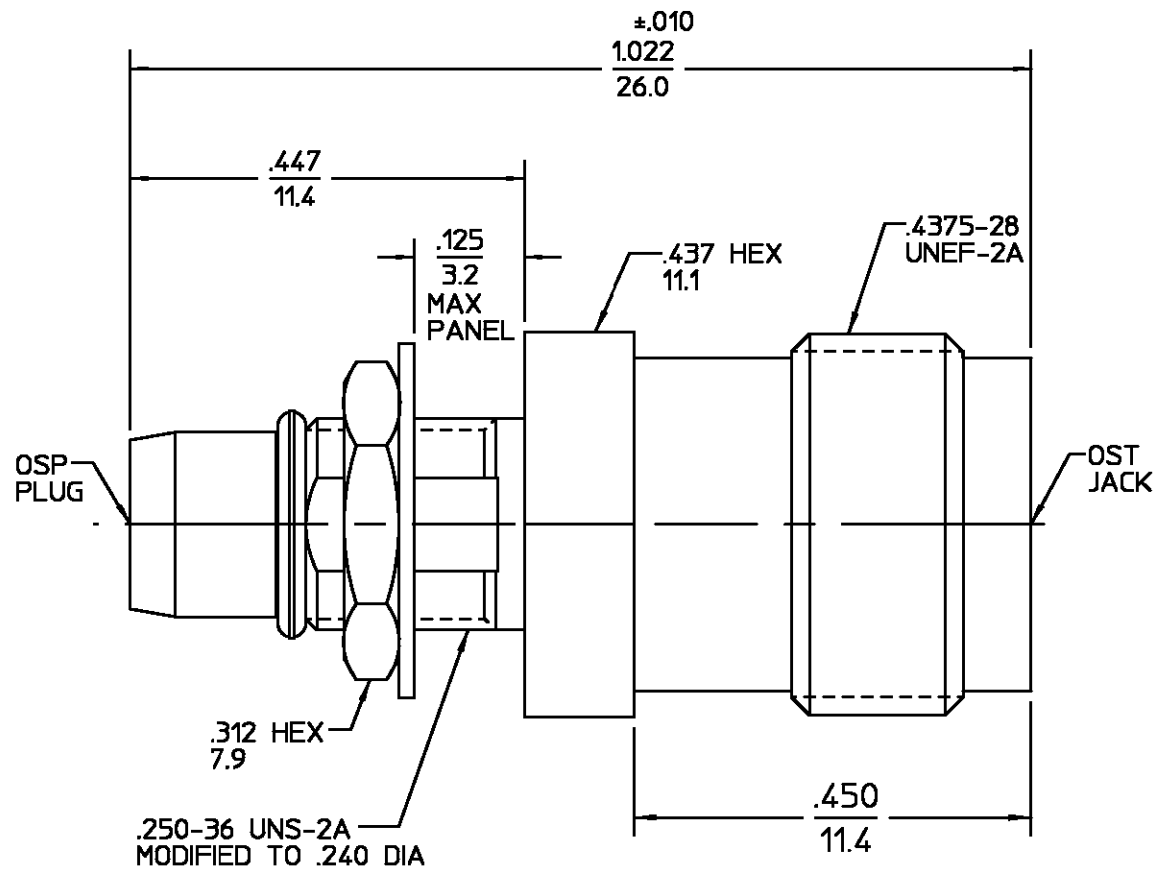

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
01 ₀	RELEASED	9/12/94	<i>D. Cornelli</i>
B	PER EC 0U20-0262-01	18DEC01	<i>C. Huang</i>

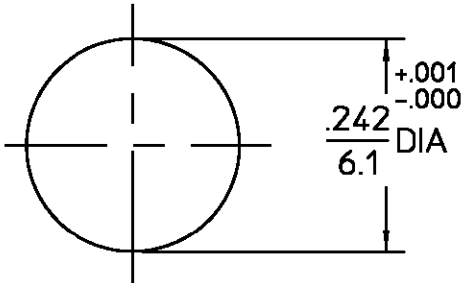

RECOMMENDED MOUNTING HOLE

HOUSING MOUNTING NUT LOCKWASHER	STAINLESS STEEL PER ASTM-A484 AND ASTM-A582, TYPE 303	PASSIVATE PER QQ-P-35
DIELECTRIC	TFE FLUOROCARBON PER ASTM-D-1457	N/A
CENTER CONTACT	BERYLLIUM COPPER PER ASTM B 196, ALLOY C17300, CONDITION H	GOLD PLATE PER MIL-G-45204
O-RING	FLOUROSILICONE PER MIL-R-25988, CLASS 1, TYPE 1	N/A
COMPONENT	MATERIAL	FINISH
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCE ON FRAC. DEC. ANGLES ± 1/64 ±.005 ± 1°		
DRAWN BY <i>M. J.</i> DATE 9/7/94 CHECKED BY APPD BY <i>D. Cornelli</i> 9/12/94		
AMP Incorporated 140 Fourth Avenue Waltham, MA 02451-7599		
These drawings and specifications are the property of Omni Spectra Incorporated and shall not be reproduced or copied or used in whole or in part as the basis for the manufacture or sale of item(s) without written permission.		
USE ASS'Y PROCEDURE NO. AP. <u>N/A</u>		
TITLE OST JACK TO OSP PLUG BULKHEAD FEEDTHROUGH ADAPTER		
SIZE B	CODE IDENT NO. 26805	3184-2451-02
SCALE 5:1	REV 01 ₀	
SHEET 1 OF 1		

CAPTURED CENTER CONTACT

.XXX = in
XX.X = mm