

4

3

2

1




LOC		DIST		REVISIONS				
AG	0	P	LTR	DESCRIPTION		DATE	DMN	AP'D
		Q		REVISED PER ECO-13-019307		210DEC13	OL	SZ

1. USED IN AMP-DUAC/PL™ RECEPTACLE HOUSINGS. ONE REQUIRED PER HOUSING.
2. INSTALL LATCH ASSEMBLY AFTER CUSTOMER SUPPLIED BACKSHELL. (USE OF BACKSHELL IS OPTIONAL).
3. LATCH ASSEMBLY AVAILABLE WITH EXTENDED LEVER ARM, 794150-1.

4 MATERIAL: LATCH ARM – PBT, GLASS REINFORCED
COLOR – NATURAL.
SPRING – STAINLESS STEEL.

5 MATERIAL: LATCH ARM – PBT, GLASS REINFORCED
COLOR – TERRACOTA
SPRING – STAINLESS STEEL.

6 MATERIAL: LATCH ARM – PBT, GLASS REINFORCED
COLOR – BLURPL
SPRING – STAINLESS STEEL.

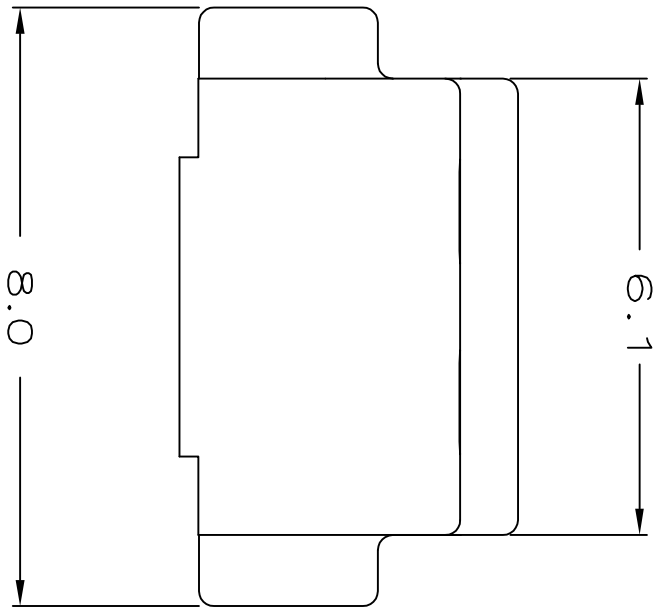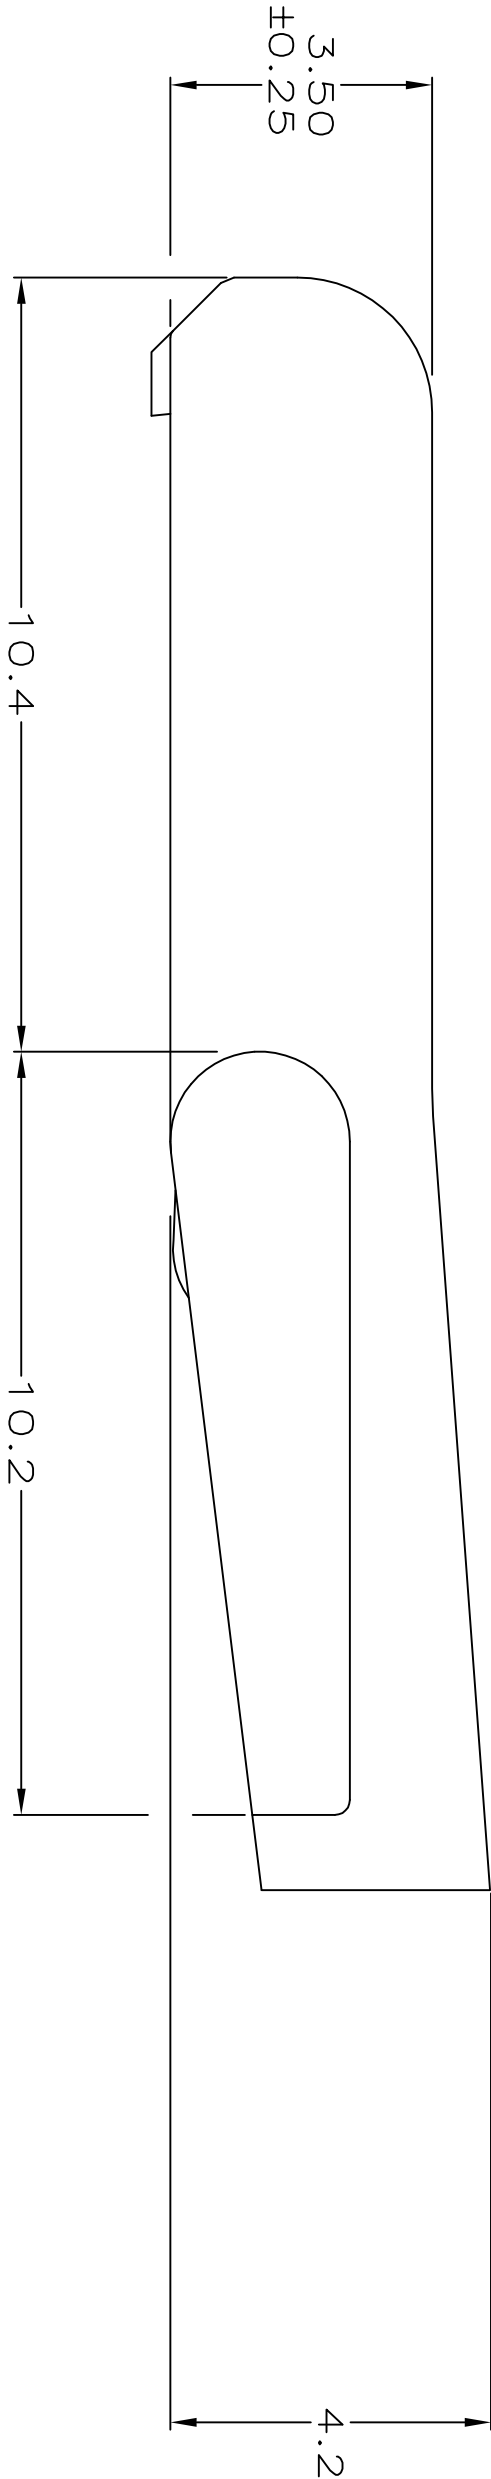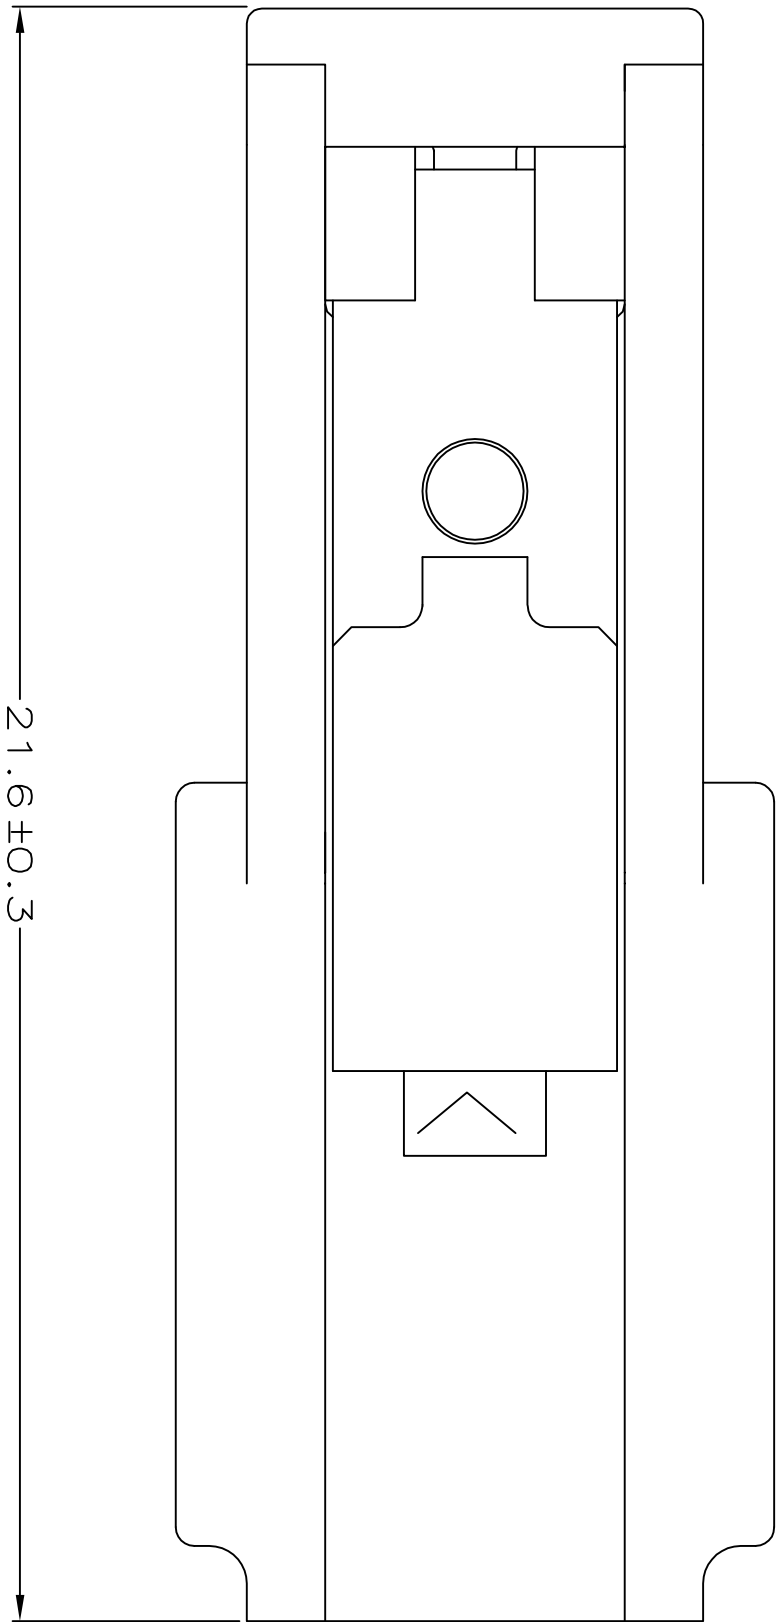

C1

6	794150-3
5	794150-2
4	794150-1
MATERIAL PART NUMBER	

THIS DRAWING IS A CONTROLLED DOCUMENT.									
DIMENSIONS:		TOLERANCES, UNLESS OTHERWISE SPECIFIED:		DMN	AMP Incorporated				
mm				CHK	Harrisburg, PA 17105-3608				
				R. SWING					
				AP'D	AMP				
				E. BELLES		LATCH ASSEMBLY, STANDARD,			
				PRODUCT SPEC		AMP-DUAC/PL™ POWER CONNECTOR			
				108-1646					
				APPLICATION SPEC					
				114-6067					
				WEIGHT					
				-					
				CUSTOMER DRAWING					
				SIZE		CAGE CODE		DRAWING NO	
				A2		00779		794150	
						RESTRICTED TO			
				</					

794150