FIBOX
Enclosing innovations

# TEMPO TPC 342912T



| | | | |
|---|---|---|---|
| **Order symbol**: | TPC 342912T | **EAN**: | 6418074086952 |
| **Product nbr**: | 5824009 | **El. number**: | |
| **Description**: | Enclosure, PC | Finland: | |
| **Remarks**: | Clear transparent cover | | |

Including: Base with PUR gasket and screws for mounting plate/DIN-rail, cover with polyamide cover screws and plastic hinges.

Sample photo

| **Dimensions**: | **Length** | **Width** | **Height** |
|---|---|---|---|
| **mm**: | 344 | 289 | 117 |
| **inch**: | 13.5 | 11.4 | 4.6 |

**Materials**:

| | |
|---|---|
| **Material**: | Polycarbonate |
| **Base colour**: | RAL 7035 -light grey |
| **Cover screws material**: | Polyamide |
| **Cover colour**: | RAL 7035 -light grey |
| **Cover screws colour**: | Grey |
| **Gasket material**: | Polyurethane |

**Temperatures**:

| | |
|---|---|
| **Temperature °C (short term)**: | -40 … 120 °C |
| **Temperature °C (continuous)**: | -40 … 80 °C |
| **Temperature °F (short term)**: | -40 … 250 °F |
| **Temperature °F (continuous)**: | -40 … 175 °F |

**Accessories**:

| | |
|---|---|
| MP 3429 | Mounting plate |

**Accessories**:

| | |
|---|---|
| DR 316 | DIN-35 Mounting rail |
| ARH 2328 | DIN-35 Mounting rail |
| FP 10674 | |


**Rating**:

Ingress Protection (EN 60529): IP65
Impact Resistance (EN 62262): IK07/IK08
Electrical insulation: Totally insulated
Halogen free (DIN/VDE 0472, Part 815): 1
Flammability Rating: UL 746C 5"
Glow Wire Test (IEC 695-2-1) °C: 960
NEMA Class: NEMA 1, 4, 4X, 12

**Certificates**:

SGS Fimko

TEMPO 344x289x117

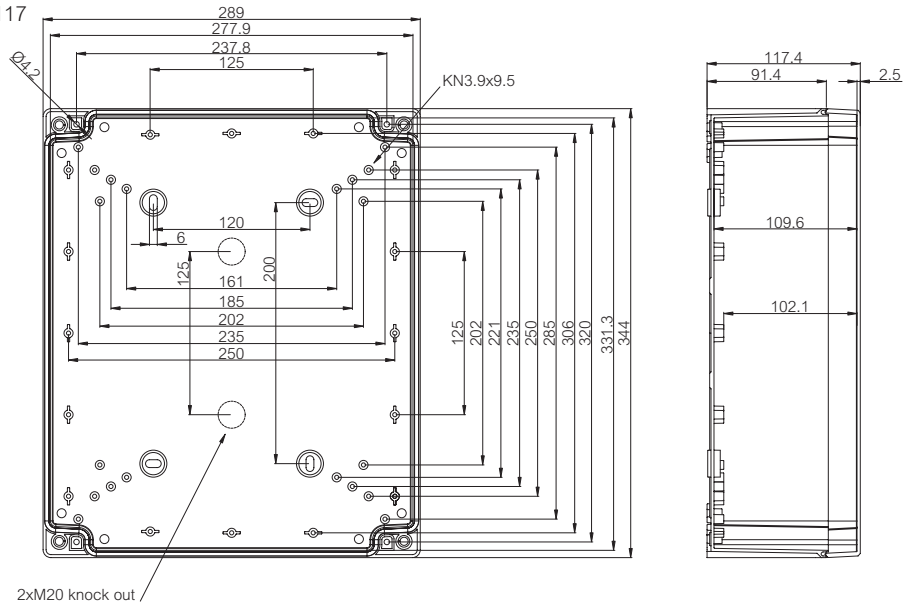


© Fibox Oy, Data subject to change without notice (printed: 30.1.2020)